

ideolux

product book

pro outdoor

25

simplicity
is the ultimate
sophistication
leonardo da vinci


company

ideolux designs, engineers and produces high-quality LED Lighting. Our project-grade products, systems and services comply with international quality & safety requirements

ideolux's mission is to streamline supply chain while elevating quality standards. We continuously innovate using cutting edge technology and regularly launch novel solutions thanks to a solid LED know-how and dedicated R&D

ideolux's extensive indoor and outdoor product book covers complete projects. At the same time, our flexible and highly skilled technical support team provides clients with professional services such as lighting design, product customization, bespoke product design, test reports, certification, and much more

rooted in Italy, Ideolux has strategically expanded to the UAE with a regional office and warehouse. Today, Ideolux offers localized marketing and technical support to its professional customers and consumers in the Middle East

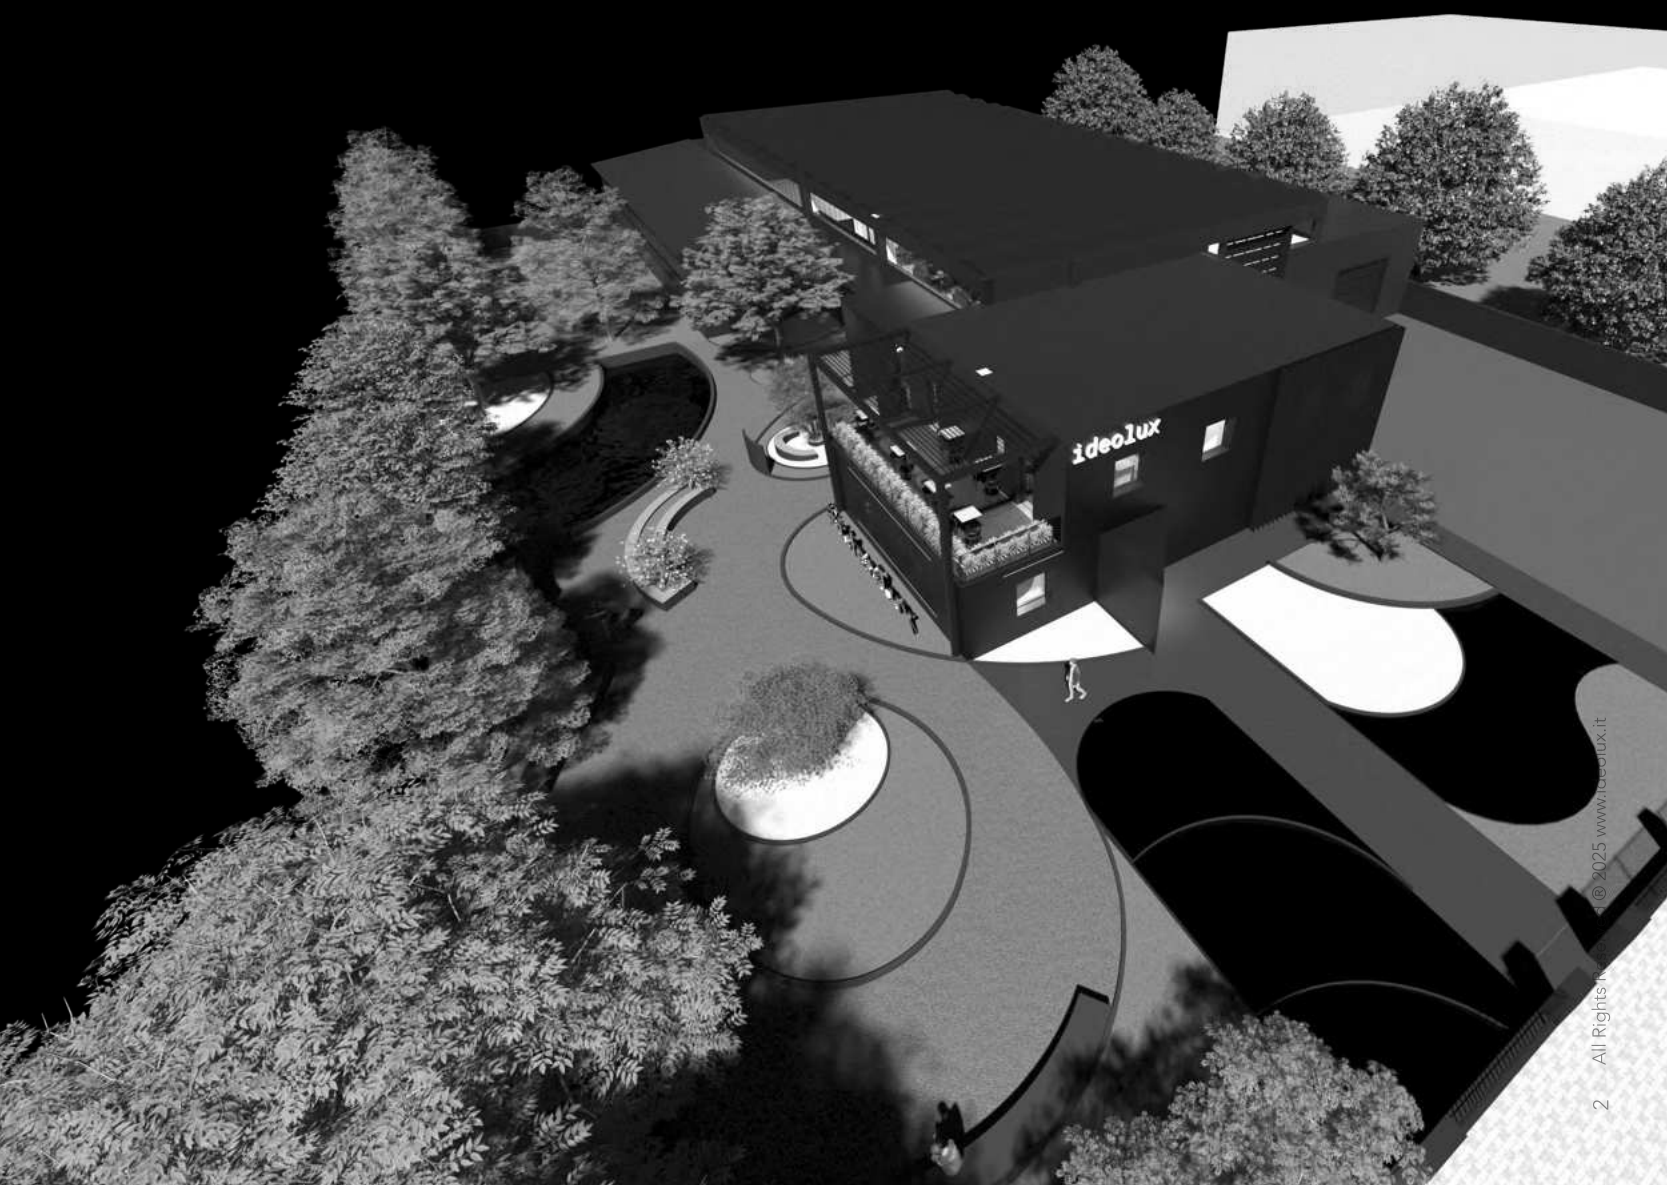

25 product book collection

for a comprehensive view of our products, please explore our other product book series. These books provide detailed information and showcase the full collection, offering a wide variety of solutions to suit various needs and preferences



intro

our intro offers a general overview showing a dedication to innovation quality and excellence. It highlights our expertise in crafting tailored solutions, from luxury interiors to large scale outdoors, proving our commitment to precision, creativity and positive impact



lux indoor

lux indoor series combines exceptional performance and sophistication, making it the ideal choice for high-end unique environments. This series is designed to deliver unparalleled brilliance and efficiency, creating an atmosphere of unrivalled elegance



pro indoor

pro indoor series is designed for professional projects, offering innovative minimal designs, cutting-edge specifications, and full customization options. Combining beauty in design and efficiency, these products create refined indoor spaces



lux outdoor

lux outdoor series combines sophistication and meticulous craftsmanship. This series is ideal for public realm, luxury landscapes and facades. it highlights design elements with brilliance and efficiency, transforming outdoor spaces into exquisite environments



pro outdoor

pro outdoor series features innovative, minimalistic designs with cutting-edge specifications, and full customization. Ideal for outdoor spaces, these products enhance architectural elements with exceptional performance and versatility



technical indoor & outdoor

technical indoor & outdoor series offers robust designs and cutting-edge technical specifications. With long lasting indoor illumination and weather resistant outdoor performance, this series suits professional projects requiring versatility and quality lighting

pro index

professional project range with a focus on innovative minimal designs, cutting edge specs and fully customizable

architectural outdoor

outdoor range meticulously crafted for balconies, gardens, lawns, and walkways, highlighting exterior architectural elements

wet area spots



23
pro proof down

25
pro proof down

27
pro proof spot

29
pro proof spot
(trimless)

31
pro canopy spot



35
pro canopy cylindrical

37
pro hole modular

soft and hardscape spots



43
pro proof spike

51
pro cylindrical spike

55
pro round spike

59
pro square spike

wall sconces



67
pro slate wall

69
pro cuboid wall

71
pro mono wall

73
pro mono wall

75
pro duo wall

wall sconces



77
pro duo wall



83
pro cross wall



85
pro cross wall

framers



91
pro frame linear



93
pro frame linear



95
pro frame corner



97
pro frame wedge

grazers



103
pro linear graze




109
pro modular graze



111
pro modular graze



115
pro chain graze



117
pro flex graze

pro index

professional project range with a focus on innovative minimal designs, cutting edge specs and fully customizable

architectural outdoor

outdoor range meticulously crafted for balconies, gardens, lawns, and walkways, highlighting exterior architectural elements

floods











125

pro wash flood

127

pro disk flood

129

pro proof bollard

131

pro cone flood

135

pro square flood

bollard and outdoor collections











143

pro round bollard

145

pro cut bollard

147

pro wedge bollard

149

pro rectangular bollard

153

pro slim bollard











155

pro slim bollard

157

pro square bollard

159

pro shroom bollard

161

pro shroom bollard

163

pro frame bollard







167

pro cap bollard

169

pro cap spike

171

pro cap table

columns and urban décor

				
177 pro round column	179 pro round column	181 pro square column	185 pro rectangular top	187 pro rectangular top
				
189 pro rectangular top	191 pro rectangular top	193 pro round top	195 pro square top	197 pro cone top
				
199 pro cone top	201 pro plate top	203 pro plate top	205 pro disk top	207 pro disk top
				
209 pro disk top	211 pro cobra top			

pro index

professional project range with a focus on innovative minimal designs, cutting edge specs and fully customizable

architectural outdoor

outdoor range meticulously crafted for balconies, gardens, lawns, and walkways, highlighting exterior architectural elements

recessed ingrounds



217
pro round up



219
pro tilt up



221
pro tilt up



223
pro deep up



225
pro deep up



229
pro asymmetric up



231
pro zoom up



233
pro mini up



237
pro micro up



239
pro nano up



241
pro pico up



243
pro linear up



245
pro linear ice



249
pro round over

trimless recessed ingrounds



255
pro round trimless



257
pro square trimless



259
pro linear trimless

step fixtures

				
265 pro step curve	267 pro step curve	269 pro step linear	271 pro step fin	273 pro round step
				
275 pro square step	277 pro square grille	279 pro rectangular step	281 pro rectangular grille	

handrails

				
287 pro rail spot	289 pro rail snoot	291 pro rail flat	293 pro rail flat	295 pro rail bar
				
297 pro rail bar	299 pro rail bar			

pro index

professional project range with a focus on innovative minimal designs, cutting edge specs and fully customizable

architectural outdoor

outdoor range meticulously crafted for balconies, gardens, lawns, and walkways, highlighting exterior architectural elements

brass fixtures



305
pro brass spike



309
pro brass spike



311
pro brass flood



315
pro brass wall



317
pro brass wall



319
pro brass pendant



321
pro brass pendant



323
pro brass washer



327
pro brass washer



331
pro brass shade



333
pro brass shade



335
pro brass shade



337
pro brass bollard



339
pro brass rectangular

brass fixtures



341
pro brass top



343
pro brass up



347
pro brass up



351
pro brass step



353
pro brass step



355
pro brass sub

pro index

professional project range with a focus on innovative minimal designs, cutting edge specs and fully customizable

architectural outdoor

outdoor range meticulously crafted for balconies, gardens, lawns, and walkways, highlighting exterior architectural elements

high performance strips



361
pro proof strip



363
pro linear rope



367
pro silicone cover



368
pro silicone profile



369
pro silicone cover

pro index

professional project range with a focus on innovative minimal designs, cutting edge specs and fully customizable

architainment lighting

architainment range engineered to merge architecture and entertainment, elevating spaces with dynamic and colorful illumination


media façade




377
pro color bar




381
pro color bar



385
pro top line




387
pro side line



389
pro flex line



393
pro linear profile



394
pro flex profile



395
pro flex rope



401
pro dome pixel



403
pro dome profile



405
pro color pixel



407
pro color pixel



409
pro acc controller



410
pro acc slave



411
pro acc amplifier



413
pro meanwell driver



415
pro tunable driver


pro index

professional project range with a focus on innovative minimal designs, cutting edge specs and fully customizable

architectural underwater

underwater range expertly designed to be fully submerged, creating elegant effects and mesmerizing radiance underwater

strips



423
pro sub strip



425
pro sub line

spike



431
pro sub spike

floods



437
pro sub flood

recessed fixtures



443
pro sub bar



447
pro sub up



449
pro sub jet



451
pro sub mini



architectural outdoor

introducing an exceptional collection of outdoor LED lighting solutions, thoughtfully designed to redefine exterior spaces with enduring elegance and cutting-edge innovation. This series harmonizes timeless aesthetics with state-of-the-art technology, effortlessly enhancing any outdoor environment

enlightening outdoor spaces with a flawless fusion of style and functionality, our architectural outdoor lighting achieves a seamless balance between aesthetics and performance, elevating the allure of the surroundings



wet area spots

19



soft and hardscape spots

39



wall sconces

63



framers

87



grazers

99



floods

121



bollards and outdoor collections

139



columns and urban décor

173



recessed ingrounds

213



trimless recessed ingrounds

251



step fixtures

261



handrail fixtures

283



brass fixtures

301



high performance strips

357



wet area spots

introducing our exceptional range of wet area LED spotlights, meticulously crafted to redefine outdoor spaces with a harmonious fusion of brilliance and functionality

built to withstand the elements, including wet areas, these spotlights emphasize architectural elements and accentuate focal points, providing a captivating ambiance that enriches your surroundings with the seamless balance of beauty and performance



wet area
locations



adjustable
luminaire body



diverse beam
angles



multiple CCTs



reflector color
choices



high quality
material





pro

proof down

pro proof down is an IP65 recessed downlight engineered for durability and performance. Designed for optimal passive cooling, it comes in two faceplate variations: a sleek stainless steel option or an aluminum step faceplate, making it versatile for a range of architectural applications



ceiling recessed



architectural outdoor



residential




commercial




workplace

side view



bottom view



General Luminaire Data

Body Color



stainless steel

Diffuser Color



transparent

Body Material

Stainless Steel + Aluminum

Diffuser Material

Polycarbonate

Ingress Protection

65

Lifetime

50,000hrs

Electrical Characteristics

Voltage

220-240V

Frequency

50-60Hz

Power Factor

0.9

Protection

Class II

Wattage

11 | 20 | 35 | 44W

Control

DIG On-Off | TRIAC | DIM 0-10V | DALI

Photometry & Performance

*available upon request

Light Source

LED SMD

Delivered Output

1287 | 2340 | 4095 | 5148lm


Luminaire Efficacy

117lm/W


CRI

80

CCT




Beam Angle

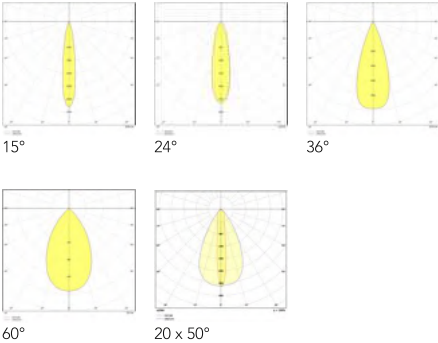

Accessories

Included	Control Gear
Sold Separately	Honeycomb Louvre

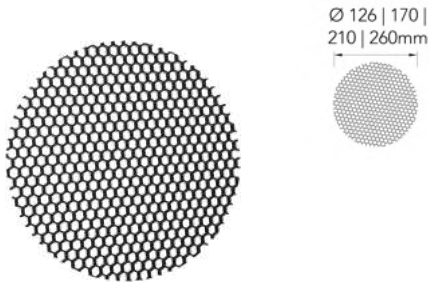

Certifications & Standards

CE
RoHS
LM80
IEC61347

pro proof honeycomb

pro proof honeycomb is a diffuser accessory that offers enhanced glare control and uniform light distribution

Ø 126mm	PPHSM12BNNONOTNONONOT
Ø 170mm	PPHSM17BNNONOTNONONOT
Ø 210mm	PPHSM21BNNONOTNONONOT
Ø 260mm	PPHSM26BNNONOTNONONOT

Body Color Black
Body Material Aluminum

Product Code


*Parameters not **interselectable**. Each dimension to be matched with corresponding output

P	P	D	CR	DM*	S	T	65	OUT*	CT	BM	CON
Family	Sub	Product	Mounting	Dimension	Body	Diffuser	IP	Output	CCT	Beam	Control
				13 136mm				128 1287lm	27 2700K	15 15deg	DIG On-Off
				18 186mm				234 2340lm	30 3000K	24 24deg	TRI TRIAC
				22 220mm				409 4095lm	35 3500K	36 36deg	DIM 0-10V
				27 270mm				514 5148lm	40 4000K	60 60deg	DAL DALI
									50 5000K	20 20x50	

pro

proof down

pro proof down is an IP65 recessed downlight engineered for durability and performance. Designed for optimal passive cooling, it comes in two faceplate variations: a sleek stainless steel option or an aluminum step faceplate, making it versatile for a range of architectural applications



General Luminaire Data

Body Color	black sandy matt white sandy matt grey silver
Reflector Color	black sandy matt white sandy matt grey silver
Body Material	Aluminum
Reflector Material	Aluminum
Ingress Protection	65
Lifetime	50,000hrs


Electrical Characteristics

Voltage	220-240V
Frequency	50-60Hz
Power Factor	0.9
Protection	Class II
Wattage	11 20 35W
Control	DIG On-Off TRIAC DIM 0-10V DALI

Photometry & Performance

*available upon request	
Light Source	LED SMD
Delivered Output	1287 2340 4095lm
Luminaire Efficacy	117lm/W
CRI	80
CCT	2700K 3000K 3500K 4000K 5000K RGBW * TW 2700K-5000K *

Beam Angle

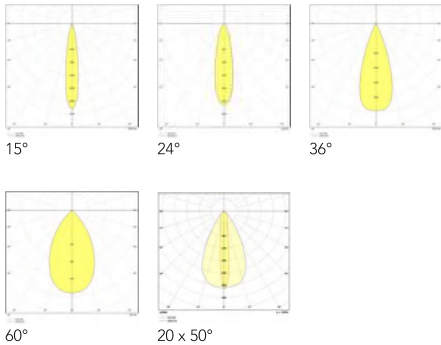


Accessories

Included	Control Gear
Sold Separately	Honeycomb Louvre

Certifications & Standards

CE
RoHS
LM80
IEC61347

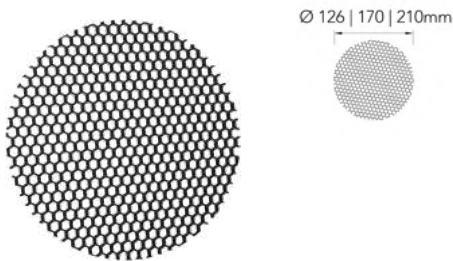

pro proof honeycomb

pro proof honeycomb is a diffuser accessory that offers enhanced glare control and uniform light distribution

- Ø 126mm PPHSM12BNNONOTNONONOT
- Ø 170mm PPHSM17BNNONOTNONONOT
- Ø 210mm PPHSM21BNNONOTNONONOT

Body Color ■ Black
Body Material Aluminum

Product Code

P	P	D	CR	DM*	B**	R**	65	OUT*	CT	BM	CON
Family	Sub	Product	Mounting	Dimension	Body	Reflector	IP	Output	CCT	Beam	Control
				13 136mm	B Black Sandy	B Black Matt		128 1287lm	27 2700K	15 15deg	DIG On-Off
				18 186mm	Matt	W White Matt		234 2340lm	30 3000K	24 24deg	TRI TRIAC
				22 220mm	W White Sandy	G Grey		409 4095lm	35 3500K	36 36deg	DIM 0-10V
					Matt	S Silver			40 4000K	60 60deg	DAL DALI
					G Grey				50 5000K	20 20x50	
					S Silver						

*Parameters not **interselectable**. Each dimension to be matched with corresponding output

Parameters not **interselectable. Each dimension to be matched with corresponding output

pro



proof spot

pro proof spot is an IP65 recessed, tiltable, LED spotlight. It is made with die-casted aluminum, and its shape is designed for optimal passive cooling



side view

bottom view



General Luminaire Data

Body Color	 white sandy matt	
Reflector Color	 matt black	 matt white
Body Material	Aluminum	
Reflector Material	Polycarbonate	
Ingress Protection	65	
Lifetime	50,000hrs	


Electrical Characteristics

Voltage	220-240V
Frequency	50-60Hz
Power Factor	0.9
Protection	Class II
Wattage	7 10 12 20 30W
Control	DIG On-Off DIM 0-10V DALI

Photometry & Performance


Light Source	LED COB		
Delivered Output	Single Color 700 1000 1200 2000 3000lm		
	Tunable White 560 800 960 1600 2400lm		
Luminaire Efficacy	100lm/W TW 80lm/W		
CRI	90		
CCT			
	2700K	3000K	4000K
			
	5000K	5700K	TW 2700-5700K

Beam Angle

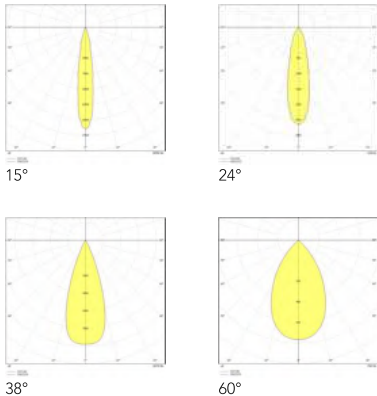

Accessories

Included	Control Gear
Sold Separately	Pinhole
	Ovalhole

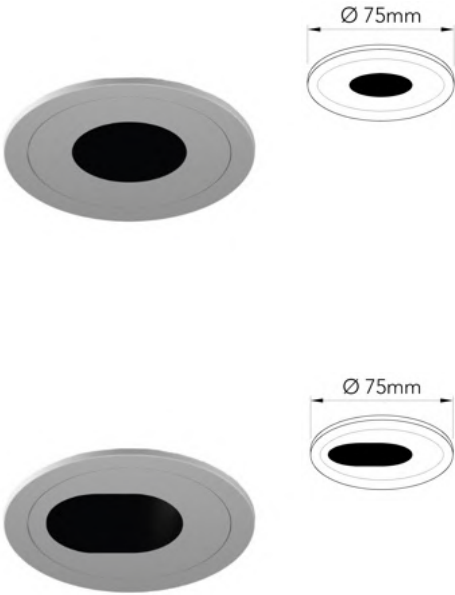

Certifications & Standards

CE
RoHS
LM80
IEC61347

pro proof pinhole

pro proof pinhole is a round-shaped pinhole accessory used to minimize glare

Ø 75mm PPPSM75WNNONOTNONONOT

Body Color  Matt White
Body Material Aluminum

pro proof ovalhole

pro proof ovalhole is an oval-shaped pinhole accessory used to minimize glare

Ø 75mm PPOSM75WNNONOTNONONOT

Body Color  Matt White
Body Material Aluminum

Product Code

P	P	S	CA	DM*	W	R	65	OUT*	CT	BM	CON
Family	Sub	Product	Mounting	Dimension	Body	Reflector	IP	Output	CCT	Beam	Control
				62 62mm		B Black Matt		700 700lm	27 2700K	15 15deg	DIG On-Off
				62 62mm		W White Matt		100 1000lm	30 3000K	24 24deg	DIM 0-10V
				84 84mm				120 1200lm	40 4000K	38 38deg	DAL DALI
				84 84mm				200 2000lm	50 5000K	60 60deg	
				10 105mm				200 2000lm	57 5700K		
				10 105mm				300 3000lm	TU Tunable		
				62 62mm				560 560lm**	2700-5700K**		
				62 62mm				800 800lm**			
				84 84mm				960 960lm**			
				84 84mm				160 1600lm**			
				10 105mm				160 1600lm**			
				10 105mm				240 2400lm**			



*Parameters not **interselectable**. Each dimension to be matched with corresponding output

**For Tunable White variations only

pro

proof spot

pro proof spot is an IP65 recessed, tiltable, LED spotlight. It is made with die-casted aluminum, and its shape is designed for optimal passive cooling

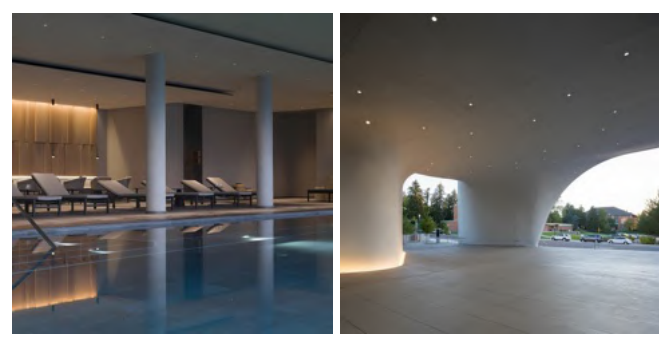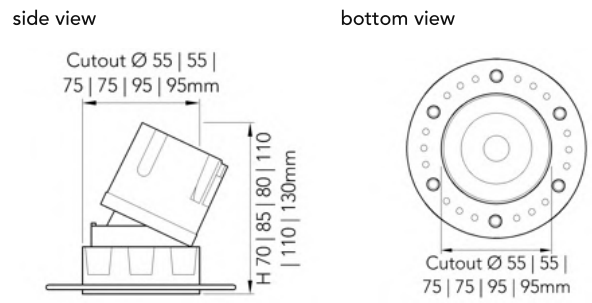

General Luminaire Data

Body Color	 white sandy matt	
Reflector Color	 matt black	 matt white
Body Material	Aluminum	
Reflector Material	Polycarbonate	
Ingress Protection	65	
Lifetime	50,000hrs	


Electrical Characteristics

Voltage	220-240V
Frequency	50-60Hz
Power Factor	0.9
Protection	Class II
Wattage	7 10 12 20 30W
Control	DIG On-Off DIM 0-10V DALI

Photometry & Performance


Light Source	LED COB		
Delivered Output	Single Color 700 1000 1200 2000 3000lm Tunable White 560 800 960 1600 2400lm		
Luminaire Efficacy	100lm/W TW 80lm/W		
CRI	90		
CCT	 2700K	 3000K	 4000K
	 5000K	 5700K	 TW 2700-5700K

Beam Angle

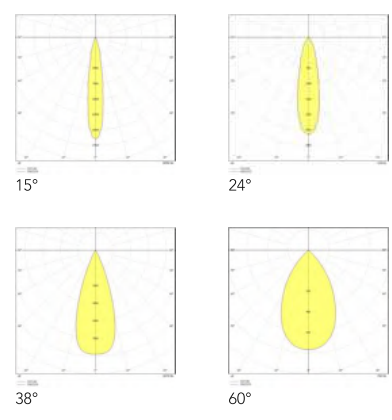

Accessories

Included	Control Gear
Sold Separately	Pinhole
	Ovalhole

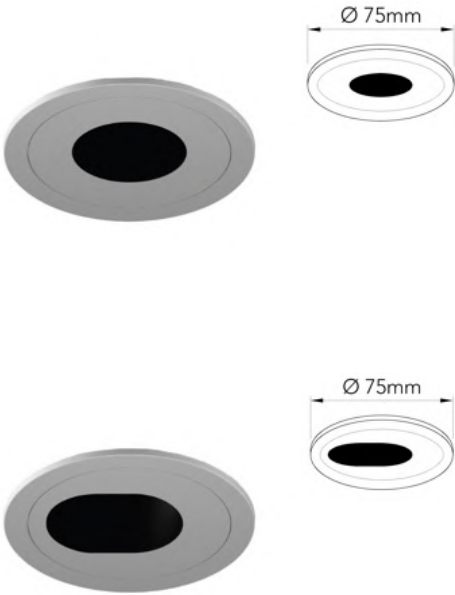

Certifications & Standards

CE
RoHS
LM80
IEC61347

pro proof pinhole

pro proof pinhole is a round-shaped pinhole accessory used to minimize glare

Ø 75mm PPPSM75WNNONOTNONONOT

Body Color Matt White
Body Material Aluminum

pro proof ovalhole

pro proof ovalhole is an oval-shaped pinhole accessory used to minimize glare

Ø 75mm PPOSM75WNNONOTNONONOT

Body Color Matt White
Body Material Aluminum

Product Code


*Parameters not **interselectable**. Each dimension to be matched with corresponding output
**For Tunable White variations only

P	P	S	CT	DM*	W	R	65	OUT*	CT	BM	CON
Family	Sub	Product	Mounting	Dimension	Body	Reflector	IP	Output	CCT	Beam	Control
				55 55mm		B Black Matt		700 700lm	27 2700K	15 15deg	DIG On-Off
				55 55mm		W White Matt		100 1000lm	30 3000K	24 24deg	DIM 0-10V
				75 75mm				120 1200lm	40 4000K	38 38deg	DAL DALI
				75 75mm				200 2000lm	50 5000K	60 60deg	
				95 95mm				200 2000lm	57 5700K		
				95 95mm				300 3000lm	TU Tunable		
				55 55mm				560 560lm**	2700-5700K**		
				55 55mm				800 800lm**			
				75 75mm				960 960lm**			
				75 75mm				160 1600lm**			
				95 95mm				160 1600lm**			
				95 95mm				240 2400lm**			

pro

canopy spot

pro canopy spot is an IP65 ceiling recessed downlight, providing a strong and consistent light source that helps improve visibility and security which makes it suitable for outdoor installations



General Luminaire Data


Body Color	 matt silver
Reflector Color	    matt black matt white silver chrome black
Body Material	Aluminum
Reflector Material	Plastic
Ingress Protection	65
Lifetime	50,000hrs

Electrical Characteristics


Voltage	220-240V
Frequency	50-60Hz
Power Factor	0.9
Protection	Class II
Wattage	9 11 13 25 30 36 41 50 60W
Control	DIG On-Off TRIAC DIM 0-10V Bluetooth ZIGBEE CASAMBI DGX DIG On-Off DMX Ready DALI

Photometry & Performance

Light Source	LED COB
Delivered Output	720 880 1040 2000 2400 2880 3280 4000 4800lm RGBW 585 715 845 1625 1950 2340 2665 3250 3900lm Tunable White 585 715 845 1625 1950 2340 2665 3250 3900lm
Luminaire Efficacy	80lm/W RGBW 65lm/W TW 65lm/W
CRI	90
CCT	



Beam Angle

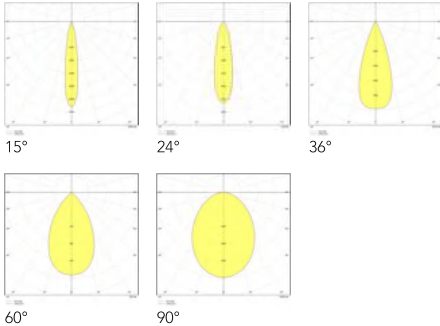

Accessories

Included	Control Gear
Sold Separately	Honeycomb Louvre
	Spread Lens
	Diffusion Lens
	Clear Lens

* see details on page 33


Certifications & Standards

CE
RoHS
LM80
IEC61347

Product Code

*Parameters not **interselectable**. Each dimension to be matched with corresponding output
For RGBW variations only *For Tunable White variations only

P	C	S	CR	DM*	S	R	65	OUT*	CT	BM	CON
Family	Sub	Product	Mounting	Dimension	Body	Reflector	IP	Output	CCT	Beam	Control
				82 82mm		B Black Matt		720 720lm	27 2700K	15 15deg	DIG On-Off
				82 82mm		W White Matt		880 880lm	30 3000K	24 24deg	TRI TRIAC
				93 93mm		S Silver		880 880lm	35 3500K	36 36deg	DIM 0-10V
				93 93mm		C Chrome		104 1040lm	40 4000K	60 60deg	BLU Bluetooth
				11 115mm		Black		200 2000lm	50 5000K	90 90deg	ZIG Zigbee
				11 115mm				240 2400lm	RW RGBW**		CAS Casambi
				13 135mm				288 2880lm	TU Tunable		DGX DIG On-Off
				13 135mm				328 3280lm	2700-6000K***		DMX Ready**
				16 160mm				400 4000lm			DAL DALI
				16 160mm				480 4800lm			
				82 82mm				585 585lm**			
				82 82mm				715 715lm**			
				93 93mm				715 715lm**			
				93 93mm				845 845lm**			
				11 115mm				162 1625lm**			
				11 115mm				195 1950lm**			
				13 135mm				234 2340lm**			
				13 135mm				266 2665lm**			
				16 160mm				325 3250lm**			
				16 160mm				390 3900lm**			
				82 82mm				585 585lm***			
				82 82mm				715 715lm***			
				93 93mm				715 715lm***			
				93 93mm				845 845lm***			
				11 115mm				162 1625lm***			
				11 115mm				195 1950lm***			
				13 135mm				234 2340lm***			
				13 135mm				266 2665lm***			
				16 160mm				325 3250lm***			
				16 160mm				390 3900lm***			

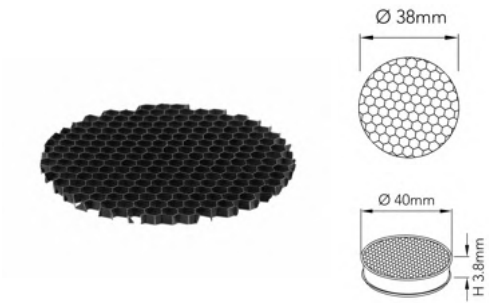


pro honeycomb lens

pro honeycomb lens is a diffuser accessory that offers enhanced glare control and uniform light distribution

Ø 38mm PHLSM38BNNONOTNONONOT

Body Color  Black
Body Material Polycarbonate

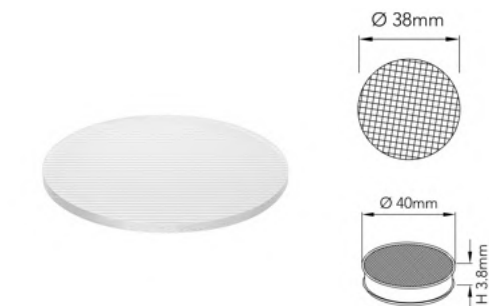


pro spread lens

pro spread lens is a diffuser accessory that broadens the light beam, providing even light distribution and reducing harsh shadows

Ø 38mm PSLSM38TNNONOTNONONOT

Body Color  Transparent
Body Material Glass

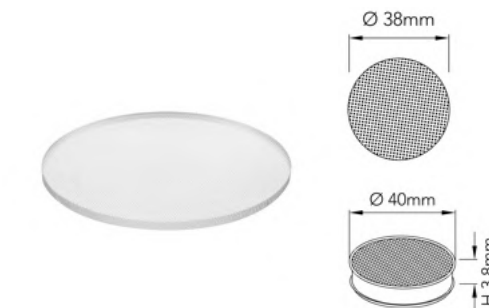


pro diffusion lens

pro diffusion lens is a diffuser accessory that softens the light, creating a smooth glow while reducing glare and harsh shadows

Ø 38mm PDLSM38TNNONOTNONONOT

Body Color  Transparent
Body Material Glass

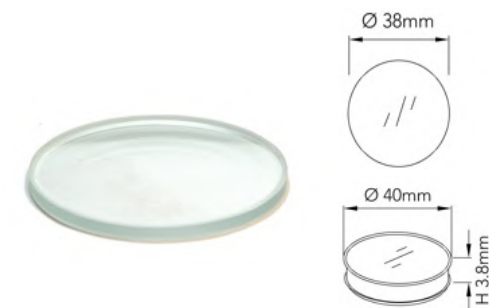

pro clear lens

pro clear lens is a diffuser accessory used to maintain the light's clarity while reducing glare

Ø 38mm PCLSM38TNNONOTNONONOT

Body Color  Transparent
Body Material Glass


pro

canopy cylindrical

pro canopy cylindrical is an IP65 surface mounted cylindrical designed spotlight. It is available in a variety of reflector colors and is suitable for outdoor installations such as under canopies and balconies



front view



General Luminaire Data

Body Color					
	black sandy matt	white sandy matt			
Reflector Color					
	matt black	matt white	silver	gold	nickel
Body Material	Aluminum				
Reflector Material	Aluminum				
Ingress Protection	65				
Lifetime	50,000hrs				


Electrical Characteristics

Voltage	220-240V
Frequency	50-60Hz
Power Factor	0.9
Protection	Class II
Wattage	8 12 15 20 25 40 50 60 94W
Control	DIG On-Off TRIAC DIM 0-10V Bluetooth ZIGBEE CASAMBI DGX DIG On-Off DMX Ready DALI

Photometry & Performance

Light Source	LED COB
Delivered Output	Single Color 800 1200 1500 2000 2500 4000 5000 6000 9400W RGBW 560 840 1050 1400 1750 2800 3500 4200 6580lm Tunable White 560 840 1050 1400 1750 2800 3500 4200 6580lm
Luminaire Efficacy	100/W RGBW 70lm/W TW 70lm/W
CRI	90
CCT	 2700K  3000K  3500K  4000K

Beam Angle



Accessories

Included Control Gear

Certifications & Standards

CE
RoHS
LM80
IEC61347

*Parameters not interselectable . Each dimension to be matched with corresponding output											
**For RGBW variations only											
***For Tunable White variations only											
Product Code											
P	C	C	SM	DM*	B	R	65	OUT*	CT	BM	CON
Family	Sub	Product	Mounting	Dimension	Body	Reflector	IP	Output	CCT	Beam	Control
				75 75mm	B Black Sandy	B Black Matt		800 800lm	27 2700K	15 15deg	DIG On-Off
				75 75mm	Matt	W White Matt		120 1200lm	30 3000K	24 24deg	TRI TRIAC
				95 95mm	W White Sandy	S Silver		120 1200lm	35 3500K	36 36deg	DIM 0-10V
				95 95mm	Matt	G Gold		150 1500lm	40 4000K	60 60deg	BLU Bluetooth
				11 115mm		N Nickel		200 2000lm	50 5000K		ZIG Zigbee
				11 115mm				250 2500lm	RW RGBW**		CAS Casambi
				14 140mm				400 4000lm	TU Tunable		DGX DIG On-Off
				14 140mm				500 5000lm	2700-6000K***		DMX Ready**
				17 170mm				500 5000lm			DAL DALI
				17 170mm				600 6000lm			
				20 205mm				600 6000lm			
				20 205mm				940 9400lm			
				75 75mm				560 560lm**			
				75 75mm				840 840lm**			
				95 95mm				840 840lm**			
				95 95mm				105 1050lm**			
				11 115mm				140 1400lm**			
				11 115mm				175 1750lm**			
				14 140mm				280 2800lm**			
				14 140mm				350 3500lm**			
				17 170mm				350 3500lm**			
				17 170mm				420 4200lm**			
				20 205mm				420 4200lm**			
				20 205mm				658 6580lm**			
				75 75mm				560 560lm***			
				75 75mm				840 840lm***			
				95 95mm				840 840lm***			
				95 95mm				105 1050lm***			
				11 115mm				140 1400lm***			
				11 115mm				175 1750lm***			
				14 140mm				280 2800lm***			
				14 140mm				350 3500lm***			
				17 170mm				350 3500lm***			
				17 170mm				420 4200lm***			
				20 205mm				420 4200lm***			
				20 205mm				658 6580lm***			


pro

hole modular


pro hole modular is a ceiling recessed, linear LED fixture. It features a deep hole-like optic, designed to minimize glare and maximize visual comfort



side view



bottom view



General Luminaire Data

Body Color	 black sandy matt white sandy matt grey
Diffuser Color	 transparent
Body Material	Aluminum
Diffuser Material	Polycarbonate
Ingress Protection	65
Lifetime	50,000hrs

Electrical Characteristics


Voltage	100-240V
Frequency	50-60Hz
Power Factor	0.9
Protection	Class II
Wattage	11 14 18 24W
Control	DIG On-Off TRIAC DIM 0-10V DALI

Photometry & Performance

*available upon request

Light Source	LED SMD
Delivered Output	1496 1904 2448 3264lm
Luminaire Efficacy	136lm/W
CRI	80
CCT	 2700K 3000K 3500K 4000K  5000K RGBW * TW 2700K-5000K *

Beam Angle

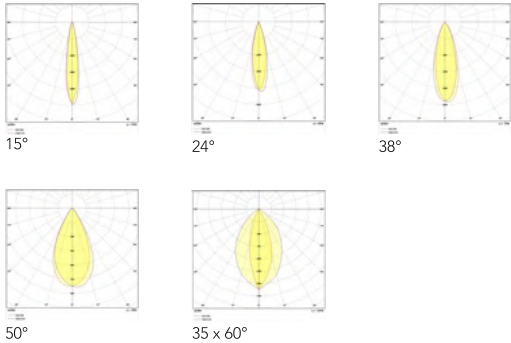

Accessories

IncludedControl Gear

Certifications & Standards

CE
RoHS
LM80
IEC61347

Product Code

*Parameters not **interselectable**. Each dimension to be matched with corresponding output


P	H	M	CR	DM*	B	T	65	OUT*	CT	BM	CON
Family	Sub	Product	Mounting	Dimension	Body	Diffuser	IP	Output	CCT	Beam	Control
				18 185mm	B Black Sandy			149 1496lm	27 2700K	15 15deg	DIG On-Off
				23 230mm	Matt			190 1904lm	30 3000K	24 24deg	TRI TRIAC
				26 260mm	W White Sandy			244 2448lm	35 3500K	38 38deg	DIM 0-10V
				32 320mm	Matt			326 3264lm	40 4000K	50 50deg	DAL DALI
					G Grey				50 5000K	35 35x60	



soft and hardscape spots

introducing our remarkable collection, tailored for both softscape and hardscape applications, promising enduring performance and aesthetic allure

this series is designed to highlight architectural elements and accentuate focal points. It creates a captivating ambiance that enriches the surroundings with a harmonious balance of beauty and performance




flexible
configuration



IP rating



multiple CCTs



durable body
material



diverse beam
angles



RGBW






pro

proof spike

pro proof spike is a versatile sleek spike that can be installed in a wide variety of applications thanks to its extensive range of mounting accessories. It comes in multiple beam angles and high output versions

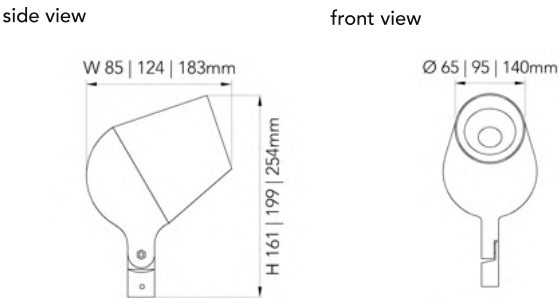

General Luminaire Data

Body Color	matt black matt white grey bronze anthracite grey
Diffuser Color	transparent
Body Material	Aluminum
Diffuser Material	Glass
Ingress Protection	66
Lifetime	50,000hrs


Electrical Characteristics

*TRIAC for 10-40W items only; DALI for 6-10W and 20-40W items only	
Voltage	120-270V 24V
Frequency	50-60Hz Not Applicable
Power Factor	0.9 Not Applicable
Protection	Class II Not Applicable
Wattage	Single Color 3 6 10 15 20 30 40 60W RGBW 9 12 24 32W
Control	DIG On-Off TRIAC NMX DMX Ready DALI

Photometry & Performance

*40x70 deg for 10-60W items only	
Light Source	LED COB
Delivered Output	Single Color 300 600 1000 1500 2000 3000 4000 6000lm RGBW 405 540 1080 1440lm
Luminaire Efficacy	100lm/W RGBW 45lm/W
CRI	80
CCT	2700K 3000K 4000K 5000K RGBW

Beam Angle

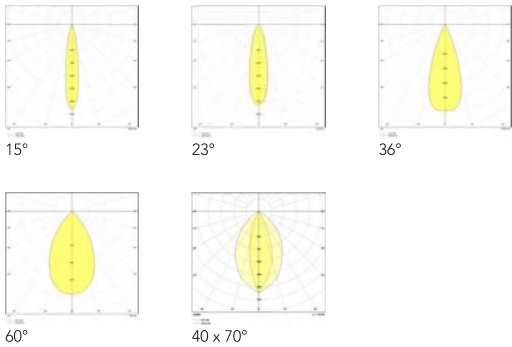

Accessories

Included	Control Gear
Sold Separately	Honeycomb Louvre
	Snoot
	Base Mount Accessories
	Pole Mount Accessories
	Tree Mount Accessories
	Inground and Floor Accessories

* see details on page 45


Certifications & Standards

CE
RoHS
LM80
IEC61347

Product Code

*Parameters not **interselectable**. Each dimension to be matched with corresponding output

P	P	S	SM	DM*	B	T	66	OUT*	CT	BM	CON*
Family	Sub	Product	Mounting	Dimension	Body	Diffuser	IP	Output	CCT	Beam	Control
				65 65mm	B Black Matt			300 300lm	27 2700K	15 15deg	DIG On-Off
				65 65mm	W White Matt			600 600lm	30 3000K	23 23deg	DIG On-Off
				95 95mm	G Grey			300 300lm	40 4000K	36 36deg	DIG On-Off
				95 95mm	B Bronze			600 600lm	50 5000K	60 60deg	DIG On-Off
				95 95mm	A Anthracite			100 1000lm	RW RGBW**	40 40 x 70	DIG On-Off
				95 95mm	Grey			150 1500lm			DIG On-Off
				95 95mm				200 2000lm			DIG On-Off
				14 140mm				300 3000lm			DIG On-Off
				14 140mm				400 4000lm			DIG On-Off
				14 140mm				600 6000lm			DIG On-Off
				95 95mm				300 300lm			TRI TRIAC
				95 95mm				600 600lm			TRI TRIAC
				95 95mm				100 1000lm			TRI TRIAC
				95 95mm				150 1500lm			TRI TRIAC
				95 95mm				200 2000lm			TRI TRIAC
				14 140mm				600 600lm			TRI TRIAC
				14 140mm				100 1000lm			TRI TRIAC
				14 140mm				150 1500lm			TRI TRIAC
				14 140mm				200 2000lm			TRI TRIAC
				14 140mm				300 3000lm			TRI TRIAC
				14 140mm				400 4000lm			TRI TRIAC
				95 95mm				405 405lm**			NMX DMX Ready
				95 95mm				540 540lm**			NMX DMX Ready
				14 140mm				108 1080lm**			NMX DMX Ready
				14 140mm				144 1440lm**			NMX DMX Ready
				95 95mm				300 300lm			DAL DALI
				95 95mm				600 600lm			DAL DALI
				95 95mm				100 1000lm			DAL DALI
				95 95mm				150 1500lm			DAL DALI
				95 95mm				200 2000lm			DAL DALI
				14 140mm				600 600lm			DAL DALI
				14 140mm				100 1000lm			DAL DALI
				14 140mm				150 1500lm			DAL DALI
				14 140mm				200 2000lm			DAL DALI
				14 140mm				300 3000lm			DAL DALI
				14 140mm				400 4000lm			DAL DALI

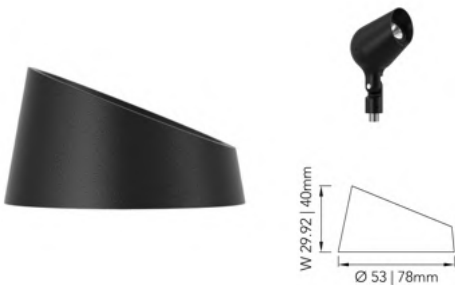

pro acc shield


pro acc shield is an anti glare shield accessory used for pro proof spikes

W 29.2mm PASSM29NN00NOTNONONOT

W 40mm PASSM40NN00NOTNONONOT

Body Color  Black

Body Material Polycarbonate

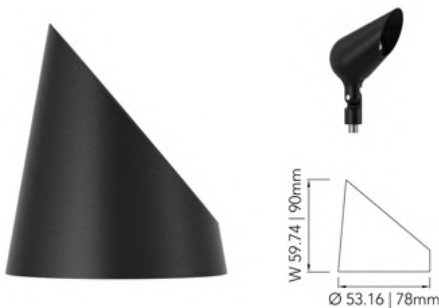

pro acc shield

pro acc shield is an anti glare shield accessory used for pro proof spikes

W 59.74mm PASSM59NN00NOTNONONOT

W 90mm PASSM90NN00NOTNONONOT

Body Color  Black

Body Material Polycarbonate



pro acc shield


pro acc shield is an anti glare shield accessory used for pro proof spikes

Ø 53.16mm PASSM53NN00NOTNONONOT

Ø 78mm PASSM78NN00NOTNONONOT

Body Color  Black

Body Material Polycarbonate

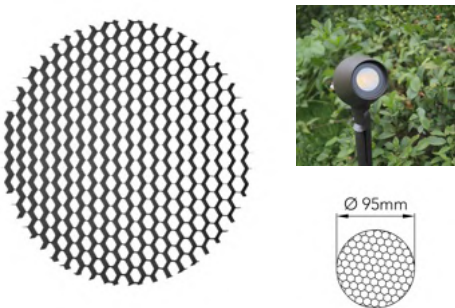

pro acc honeycomb

pro acc honeycomb is a diffuser honeycomb shape accessory used for pro proof spikes

Ø 95mm PAHSM95NN00NOTNONONOT

Body Color  Black

Body Material Aluminum

base mount accessories



pro acc base

pro acc base is a base mount accessory to be combined with pro proof spike, stake and/or extension arm

Ø 105mm PABSM10BNNONOTNONONOT

Body Color Black
Body Material Aluminum



pro acc mount

pro acc mount is a base mount accessory to be combined with pro proof spike, stake and/or extension arm

Ø 105mm PAMSM11BNNONOTNONONOT

Body Color Black
Body Material Aluminum



pro acc junction

pro acc junction is a junction base accessory to be combined with pro proof spike, stake and/or extension arm

Ø 114mm PAJSM11BNNONOTNONONOT

Body Color Black
Body Material Aluminum



pro acc wall

pro acc wall is a wall mount to be combined with pro proof spike for wall mounting application

L 160mm PAWWM16BNNONOTNONONOT

Body Color Black
Body Material Aluminum

inground and floor mounting accessories



pro acc stake

pro acc stake is a ground stake accessory used to support ground installation

L 300mm PASIR30BNNONOTNONONOT

Body Color Black
Body Material Polycarbonate



pro acc stake

pro acc stake is a ground stake accessory used to support ground installation

L 500mm PASIR50BNNONOTNONONOT

Body Color Black
Body Material PVC




pro acc extension

pro acc extension is a extension arm to be combined with junction box and/or stake. Also can be directly connected to pro proof spike

L 500mm PAEFM50BNNONOTNONONOT

Body Color Black
Body Material Aluminum

pole mounting accessories

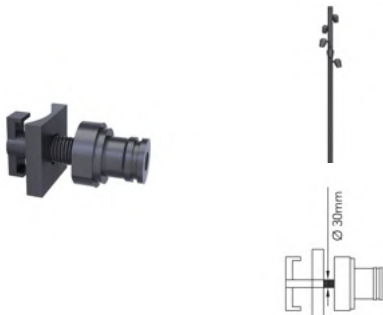

pro acc coupling

pro acc coupling is a pole mount accessory used to attach spike onto the pole

Ø 30mm PACPM30BNNONOTNONONOT

Body Color Black
Body Material Aluminum

pole mounting accessories



pro acc candlestick

pro acc candlestick is a pole mounting accessory with bending angle of 120° or 180° suitable for 60-76mm diameter pole

W 143mm PACPM14BNNONOTNONONOT

Body Color Black
Body Material Steel



pro acc candlestick

pro acc candlestick is a pole mounting accessory with bending angle of 120° or 180° suitable for 60-76mm diameter pole

W 192mm PACPM19BNNONOTNONONOT

Body Color Black
Body Material Steel



pro acc candlestick

pro acc candlestick is a pole mounting accessory with bending angle of 120° or 180° suitable for 60-76mm diameter pole

W 208mm PACPM20BNNONOTNONONOT

Body Color Black
Body Material Steel



pro acc flange

pro acc flange is a pole mount accessory used to attach spike lights onto the pole

Ø 102mm PAFPM10BNNONOTNONONOT


Body Color Black
Body Material Aluminum

pole mounting accessories




pro acc flange
pro acc flange is a pole mount accessory used to attach spike lights onto the pole
Ø 102mm PAFPM10BNNONOTNONONOT

Body Color Black
Body Material Aluminum

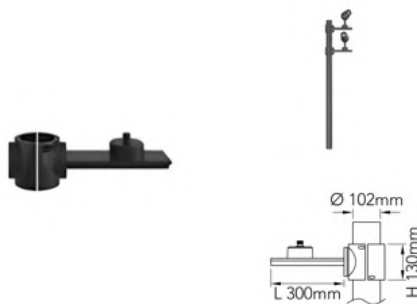


pro acc arm
pro acc arm is a pole mount accessory used to attach spike lights onto the pole
L 300mm PAAPM30BNNONOTNONONOT

Body Color Black
Body Material Aluminum

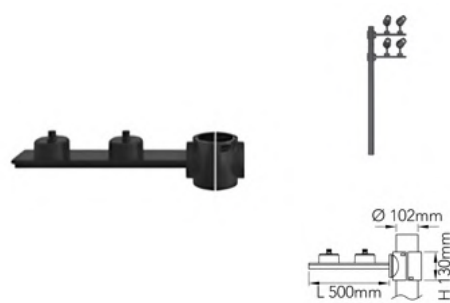

pro acc arm
pro acc arm is a pole mount accessory used to attach spike lights onto the pole
L 500mm PAAPM50BNNONOTNONONOT


Body Color Black
Body Material Aluminum

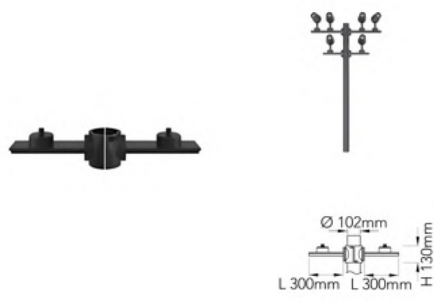

pro acc arm
pro acc arm is a pole mount accessory used to attach spike lights onto the pole
D 102mm PAAPM10BNNONOTNONONOT

Body Color Black
Body Material Aluminum

pole mounting accessories

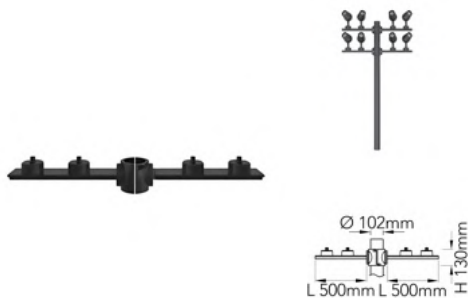


pro acc arm
pro acc arm is a pole mount accessory used to attach spike lights onto the pole

H 130mm PAAPM13BNNONOTNONONOT

Body Color Black
Body Material Aluminum

tree mounting accessories

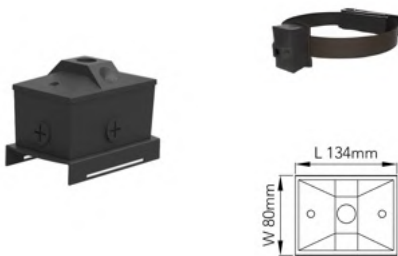

pro acc box
pro acc tree is a box accessory used to mount spike lights around trees

L 134mm PABTM13BNNONOTNONONOT

Body Color Black
Body Material Aluminum



pro acc belt
pro acc belt is a belt accessory used to mount spike lights around trees

L 2000mm PATTM20BNNONOTNONONOT

Body Color Black
Body Material Plastic



pro acc tree
pro acc tree is a ring accessory used to mount spike lights around trees


Ø 600mm PATTM60BNNONOTNONONOT

Body Color Black
Body Material Stainless Steel

pro

cylindrical spike


pro cylindrical spike has a minimal clean cylindrical look, ensuring it doesn't distract the view of the landscape it's lighting. It comes integrated with the spike accessory for ease of installation

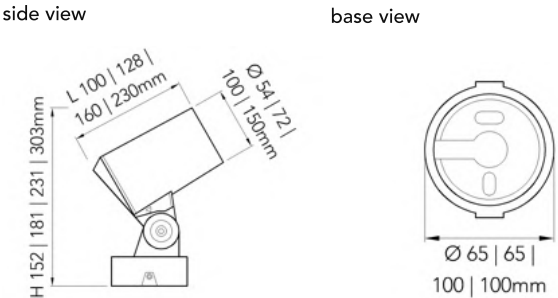

General Luminaire Data

*available upon request

Body Color



Diffuser Color



Body Material Aluminum
Diffuser Material Glass
Ingress Protection 66
Lifetime 50,000hrs

Electrical Characteristics


Voltage 220-240V | 24V
Frequency 50-60Hz | Not Applicable
Power Factor 0.9 | Not Applicable
Protection Class II | Not Applicable
Wattage Single Color 6 | 13 | 20 | 40W
RGB 9 | 12 | 15 | 30W
RGBW 12 | 14 | 21 | 42W
Control DIG On-Off | TRIAC | DIM 1-10V |
NMX DMX Ready | DALI

Photometry & Performance


*For RGB and RGBW variations only

Light Source LED COB | LED SMD *
Delivered Output Single Color 600 | 1300 | 2000 | 4000lm
RGB 270 | 360 | 450 | 900lm
RGBW 360 | 420 | 630 | 1260lm

Luminaire Efficacy 100lm/W | RGB 30lm/W | RGBW 30lm/W
CRI 80
CCT




Beam Angle

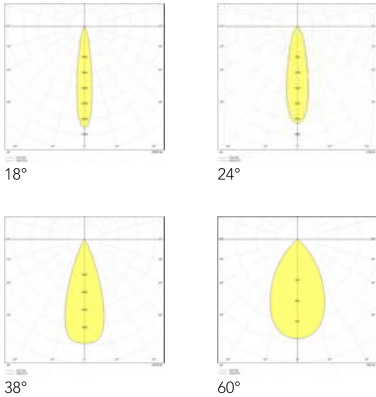

Accessories

* see details on page 53

Included	Control Gear
Sold Separately	Snoot
	Honeycomb Louvre
	Filter
	Inground Stake

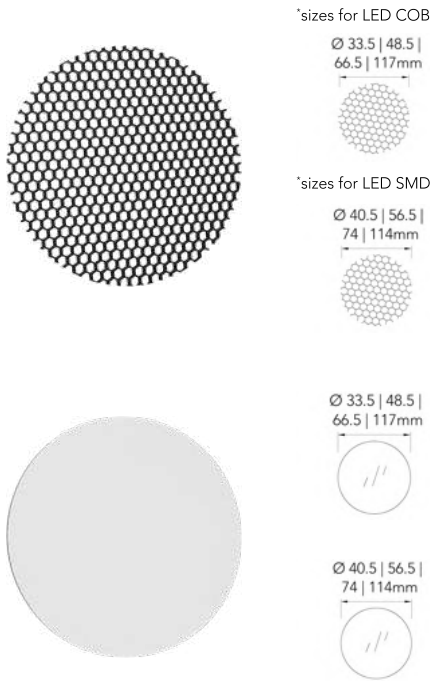

Certifications & Standards

CE
RoHS
LM80
IEC61347

pro spike honeycomb

pro spike honeycomb is a diffuser accessory that offers enhanced glare control and uniform light distribution

Ø 33.5mm	PSHSM33BNNONOTNONONOT
Ø 48.5mm	PSHSM48BNNONOTNONONOT
Ø 66.5mm	PSHSM66BNNONOTNONONOT
Ø 117mm	PSHSM11BNNONOTNONONOT

Body Color  Black
Body Material Aluminum

pro spike filter

pro spike filter is a diffuser accessory that makes the light distribution softer

Ø 33.5mm	PSHSM33BNNONOTNONONOT
Ø 48.5mm	PSHSM48BNNONOTNONONOT
Ø 66.5mm	PSHSM66BNNONOTNONONOT
Ø 117mm	PSHSM11BNNONOTNONONOT

Body Color  Transparent
Body Material Glass

Product Code

*Parameters not **interselectable**. Each dimension to be matched with corresponding output
For RGB variations only *For RGBW variations only

P	C	S	SM	DM*	B	T	66	OUT*	CT	BM	CON
Family	Sub	Product	Mounting	Dimension	Body	Diffuser	IP	Output	CCT	Beam	Control
				54 54mm	B Black Sandy			600 600lm	27 2700K	18 15deg	DIG On-Off
				72 72mm	Matt			130 1300lm	30 3000K	24 23deg	TRI TRIAC
				10 100mm	G Grey			200 2000lm	40 4000K	38 36deg	DIM 1-10V
				15 150mm				400 4000lm	50 5000K	60 60deg	NMX DMX
				54 54mm				270 270lm**	65 6500K	RG RGB***	Ready**
				72 72mm				360 360lm**	RG RGB**	RW RGBW***	NMX DMX
				10 100mm				450 450lm**	RW RGBW**		Ready***
				15 150mm				900 900lm**			DAL DALI
				54 54mm				360 360lm***			
				72 72mm				420 420lm***			
				10 100mm				630 630lm***			
				15 150mm				126 1260lm***			



pro cylindrical snoot

pro cylindrical snoot is a straight anti glare shield accessory used for pro cylindrical spikes

PCSSMNOBNNONOTNONONOT

*sizes available on request

Body Color Black
Body Material Aluminum



pro cylindrical nail

pro cylindrical nail is a slant anti glare shield accessory used for pro cylindrical spikes

PCNSMNOBNNONOTNONONOT

*sizes available on request

Body Color Black
Body Material Aluminum



pro cylindrical stake

pro cylindrical stake is a ground stake accessory used to support ground installation

L 215mm PCSIR21BNNONOTNONONOT

Body Color Black
Body Material Polycarbonate




pro cylindrical arm

pro cylindrical arm is an extension arm to be combined with stake. Also can be directly connected to pro cylindrical spike

L 300mm PCAIR30BNNONOTNONONOT
L 500mm PCAIR50BNNONOTNONONOT
L 800mm PCAIR80BNNONOTNONONOT
L 1000mm PCAIR10BNNONOTNONONOT

Body Color Black
Body Material Polycarbonate




pro cylindrical pole

pro cylindrical pole is an extension pole to be connected to pro cylindrical spike

L 300mm PCPIR30BNNONOTNONONOT
L 500mm PCPIR50BNNONOTNONONOT
L 800mm PCPIR80BNNONOTNONONOT
L 1000mm PCPIR10BNNONOTNONONOT

Body Color Black
Body Material Polycarbonate




pro cylindrical coupling

pro cylindrical coupling is a pole mount accessory used to attach spike onto the pole

L 70mm PCCPM70BNNONOTNONONOT

Body Color Black
Body Material Aluminum




pro cylindrical flange

pro cylindrical flange is a pole mount accessory used to attach spike lights onto the pole

L 150mm PCFPM15BNNONOTNONONOT

Body Color Black
Body Material Aluminum



pro cylindrical strap

pro cylindrical strap is a pole mount accessory used to attach spike lights onto the pole



L 150mm PCSPM15BNNONOTNONONOT

Body Color Black
Body Material Aluminum

pro

round spike


pro round spike is a versatile LED spike light. Its illumination has similar features to a flood light, so it has a broad array of applications. From gardens to buildings and walkways, it is ideal for high quality floodlighting

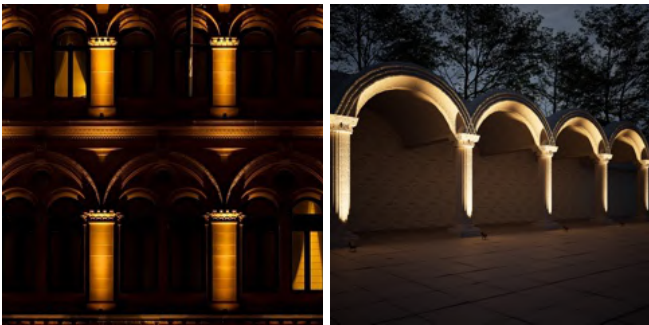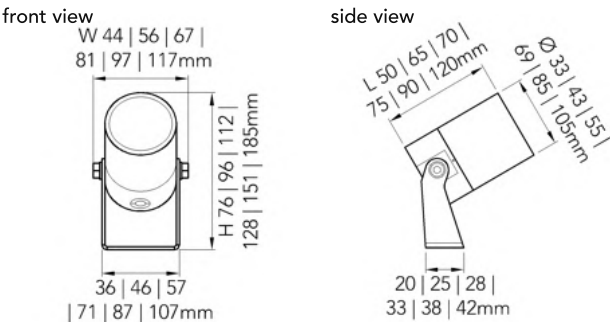

General Luminaire Data

*available upon request

Body Color



Diffuser Color



Body Material Aluminum

Diffuser Material Glass

Ingress Protection 66

Lifetime 50,000hrs


Electrical Characteristics

Voltage	220-240V
Frequency	50-60Hz
Power Factor	0.9
Protection	Class II
Wattage	2.5 4 6 10 15 23W
Control	DIG On-Off TRIAC DIM 1-10V DGX Dig On-Off DMX Ready DALI

Photometry & Performance

Light Source	LED COB
Delivered Output	Single Color 200 320 480 800 1200 1840lm RGBW 075 120 180 300 450 690lm
Luminaire Efficacy	80lm/W RGBW 30lm/W
CRI	80
CCT	 2700K  3000K  4000K  5000K  6500K  RGBW

Beam Angle

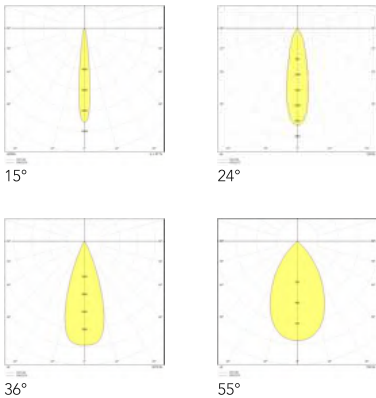

Accessories

Included	Control Gear
Sold Separately	Snoot
	Honeycomb Louvre
	Stake

* see details on page 57

Certifications & Standards

CE
RoHS
LM80
IEC61347

Product Code

*Parameters not **interselectable**. Each dimension to be matched with corresponding output
**For RGBW variations only

P	R	S	SM	DM*	B	T	66	OUT*	CT	BM	CON
Family	Sub	Product	Mounting	Dimension	Body	Diffuser	IP	Output	CCT	Beam	Control
				33 33mm	B Black Matt			200 200lm	27 2700K	15 15deg	DIG On-Off
				43 43mm	W White Matt			320 320lm	30 3000K	24 24deg	TRI TRIAC
				55 55mm	R Red			480 480lm	40 4000K	36 36deg	DIM 1-10V
				69 69mm				800 800lm	50 5000K	55 55deg	DGX DIG On-Off
				85 85mm				120 1200lm	65 6500K		DMX Ready**
				10 105mm				184 1840lm	RW RGBW**		DAL DALI
				33 33mm				075 075lm**			
				43 43mm				120 120lm**			
				55 55mm				180 180lm**			
				69 69mm				300 300lm**			
				85 85mm				450 450lm**			
				10 105mm				690 690lm**			



pro round snoot

pro round snoot is a straight anti glare shield accessory used for pro round spikes

PRSSMNOBNNONOTNONONOT

*sizes available on request

Body Color  Black
Body Material Aluminum




pro round nail

pro round nail is a slant anti glare shield accessory used for pro round spikes

PRNSMNOBNNONOTNONONOT

*sizes available on request

Body Color  Black
Body Material Aluminum



pro round honeycomb

pro round honeycomb is a honeycomb accessory design to used for optimal glare control

PRHSMNOBNNONOTNONONOT

*sizes available on request

Body Color  Black
Body Material Aluminum



pro round stake

pro round stake is a ground stake accessory used to support ground installation

L 210mm PRSIR21BNNONOTNONONOT

Body Color  Black
Body Material Polycarbonate



pro round stake

pro round stake is a ground stake accessory used to support ground installation



L 262mm PRSIR26BNNONOTNONONOT

Body Color Black
Body Material Polycarbonate

pro

square spike


pro square spike is a versatile LED spike light. Its illumination has similar features to a flood light, so it has a broad array of applications. From gardens to buildings and walkways, it is ideal for high quality floodlighting

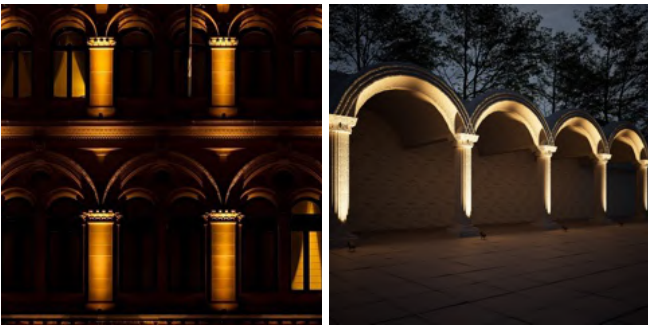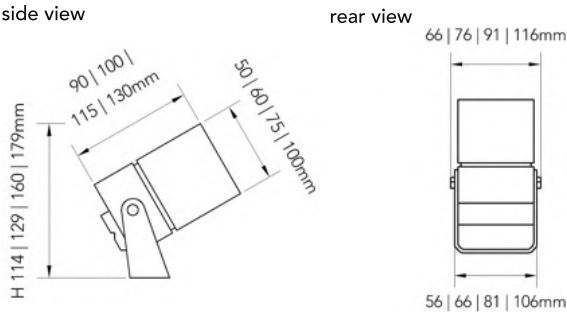

General Luminaire Data

*available upon request

Body Color



Diffuser Color



Body Material Aluminum

Diffuser Material Glass

Ingress Protection 65

Lifetime 50,000hrs


Electrical Characteristics

Voltage	220-240V
Frequency	50-60Hz
Power Factor	0.9
Protection	Class II
Wattage	6 10 16 23W
Control	DIG On-Off TRIAC DIM 1-10V DGX Dig On-Off DMX Ready DALI

Photometry & Performance

Light Source	LED COB
Delivered Output	Single Color 600 1000 1600 2300lm RGBW 180 300 480 690lm
Luminaire Efficacy	85lm/W RGBW 30lm/W
CRI	80
CCT	 2700K  3000K  4000K  5000K  6500K  RGBW

Beam Angle

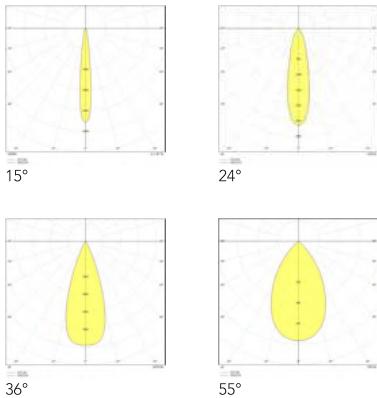

Accessories

Included	Control Gear
Sold Separately	Snoot
	Honeycomb Louvre
	Stake

* see details on page 61

Certifications & Standards

CE
RoHS
LM80
IEC61347

Product Code

*Parameters not **interselectable**. Each dimension to be matched with corresponding output
**For RGBW variations only

P	S	F	SM	DM*	B	T	65	OUT*	CT	BM	CON
Family	Sub	Product	Mounting	Dimension	Body	Diffuser	IP	Output	CCT	Beam	Control
				50 50mm	B Black Matt			600 600lm	27 2700K	15 15deg	DIG On-Off
				60 600mm	W White Matt			100 1000lm	30 3000K	24 24deg	TRI TRIAC
				75 75mm	R Red			160 1600lm	40 4000K	36 36deg	DIM 1-10V
				10 100mm				230 2300lm	50 5000K	55 55deg	DGX DIG On-Off
				50 50mm				180 180lm**	65 6500K		DMX Ready**
				60 600mm				300 300lm**	RW RGBW**		DAL DALI
				75 75mm				480 480lm**			
				10 100mm				690 690lm**			



pro square straight

pro square straight is a straight glare accessory used for pro square flood

L 41mm PSSSM41BNNONOTNONONOT
L 47mm PSSSM47BNNONOTNONONOT
L 55mm PSSSM55BNNONOTNONONOT
L 67mm PSSSM67BNNONOTNONONOT

Body Color  Black
Body Material Aluminum





pro square slant

pro square slant is a slanted glare accessory used for pro square flood

L 43mm PSSSM43BNNONOTNONONOT
L 49mm PSSSM49BNNONOTNONONOT
L 58mm PSSSM58BNNONOTNONONOT
L 73mm PSSSM73BNNONOTNONONOT

Body Color  Black
Body Material Aluminum



pro square honeycomb

pro square honeycomb is a honeycomb accessory design to used for optimal glare control

Ø 33.5mm PSHSM33BNNONOTNONONOT
Ø 43.5mm PSHSM43BNNONOTNONONOT
Ø 48.5mm PSHSM48BNNONOTNONONOT
Ø 66.5mm PSHSM66BNNONOTNONONOT

Body Color  Black
Body Material Aluminum



pro square stake

pro square stake is a ground stake accessory used to support ground installation

L 210mm PSSIR21BNNONOTNONONOT

Body Color  Black
Body Material Polycarbonate



pro square stake

pro square stake is a ground stake accessory used to support ground installation

L 262mm PSSIR26BNNONOTNONONOT

Body Color Black
Body Material Polycarbonate



wall sconces

introducing our exceptional collection of outdoor LED wall sconces, meticulously designed to redefine outdoor spaces with timeless elegance and cutting-edge innovation

this array of lighting solutions harmonizes classic aesthetics with cutting-edge technology, effortlessly elevating any outdoor environment. Beyond their stunning design, these architectural outdoor wall sconces offer energy efficiency and exceptional durability, ensuring a perfect blend of style and functionality



High CRI

color rendering
index



enhanced
aesthetics



multiple CCTs



durable body
material



diverse beam
angles



multiple color
finish options






pro

slate wall

pro slate wall has a highly aesthetic appeal for its slim rectangular shape perfect when aiming for a clean minimalist look. This perfectly highlights interesting architectural features and external geometry of the structure

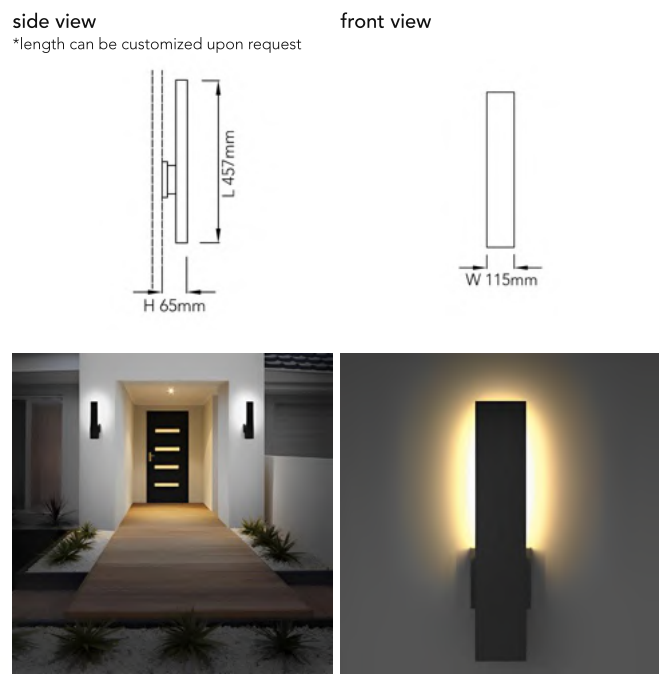

General Luminaire Data

Body Color	matt black matt white grey bronze anthracite grey
Diffuser Color	transparent
Body Material	Aluminum
Diffuser Material	Glass
Ingress Protection	65
Lifetime	50,000hrs

Electrical Characteristics

Voltage	120-270V
Frequency	50-60Hz
Power Factor	0.9
Protection	Class II
Wattage	10 15 20W
Control	DIG On-Off TRIAC DIM 1-10V DALI

Photometry & Performance

Light Source	LED SMD
Delivered Output	600 900 1200lm
Luminaire Efficacy	60lm/W
CRI	80
CCT	2700K 3000K 4000K 5000K
Beam Angle	110°


Accessories		Certifications & Standards
Included	Control Gear	CE RoHS LM80 IEC61347

Product Code											
P	S	W	WM	45	B	T	65	OUT	CT	11	CON
Family	Sub	Product	Mounting	Dimension	Body	Diffuser	IP	Output	CCT	Beam	Control
					B Black Matt			600 600lm	27 2700K		DIG On-Off
					W White Matt			900 900lm	30 3000K		TRI TRIAC
					G Grey			120 1200lm	40 4000K		DIM 1-10V
					B Bronze				50 5000K		DAL DALI
					A Anthracite						
					Grey						

pro

cuboid wall

pro cuboid wall is an LED wall light available in mono and duo variations. It features a clean rectangular shape, making it ideal as a source of illumination in home and building exteriors

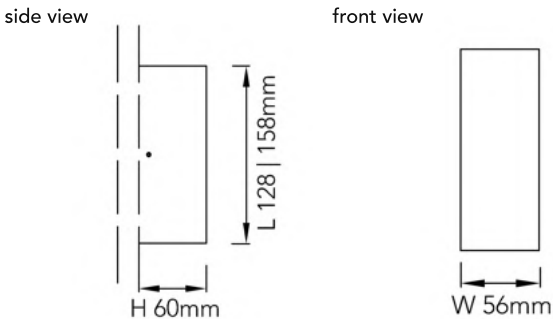

General Luminaire Data

Body Color	matt black grey
Diffuser Color	transparent
Body Material	Aluminum
Diffuser Material	Glass
Ingress Protection	65
Lifetime	50,000hrs


Electrical Characteristics

Voltage	100-240V
Frequency	50-60Hz
Power Factor	0.9
Protection	Class II
Wattage	6 12W 61 61
Control	DIG On-Off

Photometry & Performance

Light Source	LED COB
Delivered Output	300 600lm
Luminaire Efficacy	50lm/W
CRI	80
CCT	2700K 3000K 4000K 5000K 5700K

Beam Angle

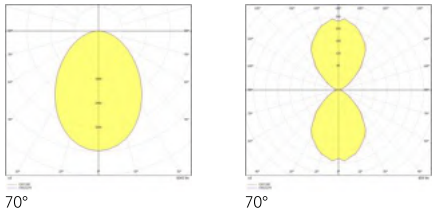

Accessories		Certifications & Standards
Included	Control Gear	CE RoHS LM80 IEC61347

Product Code										* Parameters not interselectable. Each dimension to be matched with corresponding output	
P	C	W	WM	DM*	B	T	65	OUT*	CT	70	DIG
Family	Sub	Product	Mounting	Dimension	Body	Diffuser	IP	Output	CCT	Beam	Control
				12 128mm	B Black Matt			300 300lm	27 2700K		
				15 158mm	G Grey			600 600lm	30 3000K		
									40 4000K		
									50 5000K		
									57 5700K		

pro


mono wall

pro mono wall is a LED wall light ideal for illuminating interesting architectural features throughout the night and can direct attention towards the focal points and external geometry of the structure



side view


top view

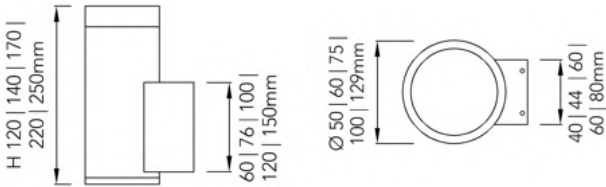

General Luminaire Data

*available upon request

Body Color



Diffuser Color



Body Material

Aluminum

Diffuser Material

Glass

Ingress Protection

65

Lifetime

50,000hrs

Electrical Characteristics

Voltage

220-240V | 24V

Frequency

50-60Hz | Not Applicable

Power Factor

0.9 | Not Applicable

Protection

Class II | Not Applicable

Wattage

Single Color 5 | 10 | 15 | 20 | 35W
RGBW 24W

Control

DIG On-Off | TRIAC | DIM 1-10V |
NMX DMX Ready | DALI

Photometry & Performance

*For RGBW variations only

Light Source

LED COB | LED SMD *

Delivered Output

Single Color 450 | 900 | 1350 | 1800 | 3150lm
RGBW 840lm


Luminaire Efficacy

90lm/W | RGBW 35lm/W


CRI

80

CCT



Beam Angle

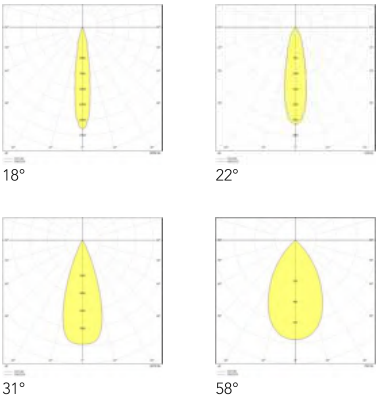

Accessories

Included	Control Gear
Sold Separately	Snoot
	Honeycomb Louvre
	Filter

* see details on page 79

Certifications & Standards

CE
RoHS
LM80
IEC61347

Product Code


P	M	W	WM	DM*	B	T	65	OUT*	CT	BM	CON
Family	Sub	Product	Mounting	Dimension	Body	Diffuser	IP	Output	CCT	Beam	Control
				50 50mm	B Black Matt			450 450lm	27 2700K	18 18deg	DIG On-Off
				60 60mm	W White Matt			900 900lm	30 3000K	22 22deg	TRI TRIAC
				75 75mm				135 1350lm	40 4000K	31 31deg	DIM 1-10V
				10 100mm				180 1800lm	50 5000K	58 58deg	NMX DMX
				12 129mm				315 3150lm	65 6500K		Ready**
				12 129mm				840 840lm**	RW RGBW**		DAL DALI

*Parameters not **interselectable**. Each dimension to be matched with corresponding output
**For RGBW variations only

pro

mono wall

pro mono wall is a LED wall light ideal for illuminating interesting architectural features throughout the night and can direct attention towards the focal points and external geometry of the structure

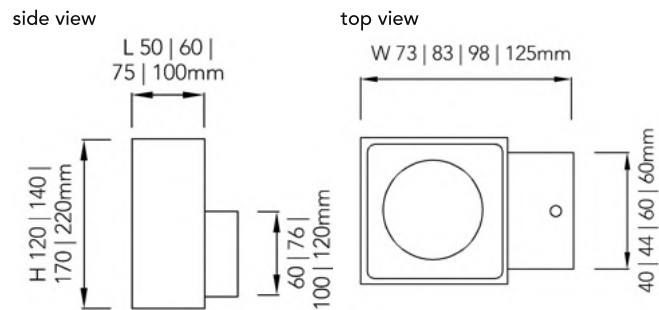

General Luminaire Data

*available upon request

Body Color



Diffuser Color



Body Material Aluminum

Diffuser Material Glass

Ingress Protection 65

Lifetime 50,000hrs

Electrical Characteristics

Voltage 220-240V | 24V

Frequency 50-60Hz | Not Applicable

Power Factor 0.9 | Not Applicable

Protection Class II | Not Applicable

Wattage Single Color 5 | 10 | 15 | 20W
RGBW 8 | 12 | 21 | 36W

Control DIG On-Off | TRIAC | DIM 1-10V |
NMX DMX Ready | DALI

Photometry & Performance

*For RGBW variations only


Light Source LED COB | LED SMD *

Delivered Output Single Color 450 | 900 | 1350 | 1800lm
RGBW 280 | 420 | 735 | 1260lm


Luminaire Efficacy 90lm/W | 35lm/W

CRI 80

CCT



Beam Angle

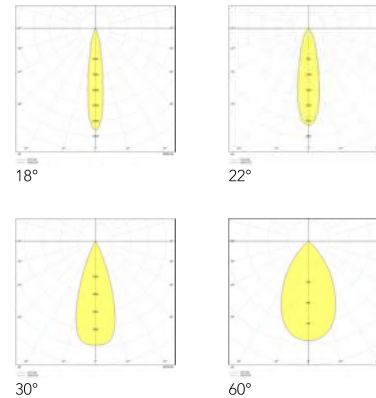

Accessories

Included	Control Gear
Sold Separately	Snoot
	Honeycomb Louvre
	Filter

* see details on page 79

Certifications & Standards

CE
RoHS
LM80
IEC61347



Product Code

*Parameters not **interselectable**. Each dimension to be matched with corresponding output
**For RGBW variations only

P	M	W	WM	DM*	B	T	65	OUT*	CT	BM	CON
Family	Sub	Product	Mounting	Dimension	Body	Diffuser	IP	Output	CCT	Beam	Control
				12 120mm	B Black Matt			450 450lm	27 2700K	18 18deg	DIG On-Off
				14 140mm	W White Matt			900 900lm	30 3000K	22 22deg	TRI TRIAC
				17 170mm				135 1350lm	40 4000K	30 30deg	DIM 1-10V
				22 220mm				180 1800lm	50 5000K	60 60deg	NMX DMX
				12 120mm				280 280lm**	65 6500K		Ready**
				14 140mm				420 420lm**	RW RGBW**		DAL DALI
				17 170mm				735 735lm**			
				22 220mm				126 1260lm**			

pro duo wall

pro duo wall is a LED wall light which emits light from top and bottom of the fixture. It is ideal for illuminating interesting architectural features and external geometry of the structure throughout the night

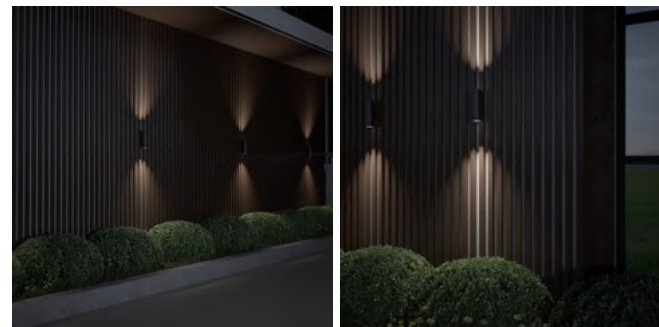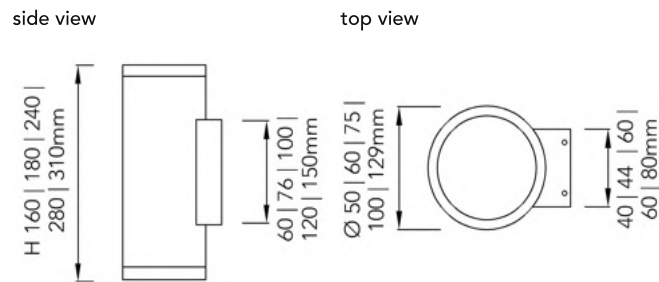

General Luminaire Data

*available upon request

Body Color



Diffuser Color



Body Material Aluminum
Diffuser Material Glass
Ingress Protection 65
Lifetime 50,000hrs

Electrical Characteristics


Voltage 220-240V | 24V
Frequency 50-60Hz | Not Applicable
Power Factor 0.9 | Not Applicable
Protection Class II | Not Applicable
Wattage Single Color 8W 4↑ 4↓ | 16W 8↑ 8↓ | 26W 13↑ 13↓ | 36W 18↑ 18↓ | 70W 35↑ 35↓
RGBW 48W 24↑ 24↓
Control DIG On-Off | TRIAC | DIM 1-10V | NMX DMX Ready | DALI

Photometry & Performance

*For RGBW variations only

Light Source LED COB | LED SMD *
Delivered Output Single Color 720 | 1440 | 2340 | 3240 | 6300lm
RGBW 1680lm
Luminaire Efficacy 90lm/W | RGBW 35lm/W
CRI 80
CCT 2700K 3000K 4000K 5000K 6500K RGBW

Beam Angle

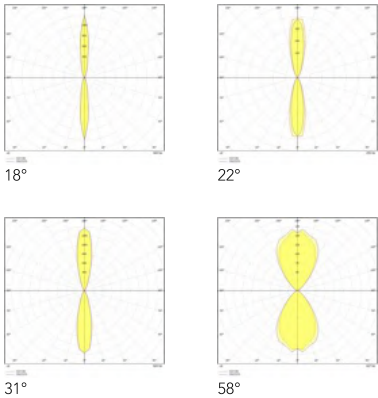

Accessories

Included	Control Gear
Sold Separately	Snoot
	Honeycomb Louvre
	Filter

* see details on page 79

Certifications & Standards

CE
RoHS
LM80
IEC61347



Product Code

*Parameters not **interselectable**. Each dimension to be matched with corresponding output
**For RGBW variations only

P	D	W	WM	DM*	B	T	65	OUT*	CT	BM	CON
Family	Sub	Product	Mounting	Dimension	Body	Diffuser	IP	Output	CCT	Beam	Control
				50 50mm	B Black Matt			720 720lm	27 2700K	18 18deg	DIG On-Off
				60 60mm	W White Matt			144 1440lm	30 3000K	22 22deg	TRI TRIAC
				75 75mm				234 2340lm	40 4000K	31 31deg	DIM 1-10V
				10 100mm				324 3240lm	50 5000K	58 58deg	NMX DMX
				12 129mm				630 6300lm	65 6500K		Ready**
				12 129mm				168 1680lm**	RW RGBW**		DAL DALI

pro duo wall

pro duo wall is a LED wall light which emits light from top and bottom of the fixture. It is ideal for illuminating interesting architectural features and external geometry of the structure throughout the night

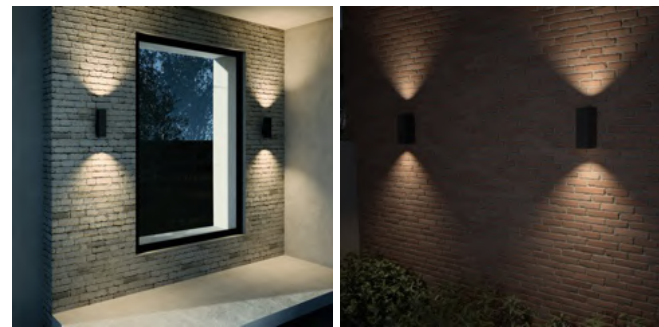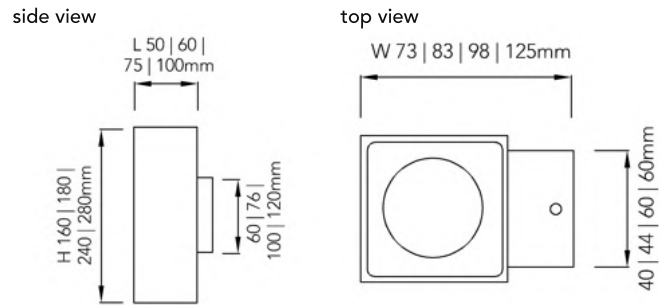

General Luminaire Data

*available upon request

Body Color



Diffuser Color



Body Material Aluminum
Diffuser Material Glass
Ingress Protection 65
Lifetime 50,000hrs


Electrical Characteristics

Voltage 220-240V | 24V
Frequency 50-60Hz | Not Applicable
Power Factor 0.9 | Not Applicable
Protection Class II | Not Applicable
Wattage Single Color 8W 4↑ 4↓ | 16W 8↑ 8↓ | 26W 13↑ 13↓ | 36W 18↑ 18↓ | RGBW 16*W 8↑ 8↓ | 24*W 12↑ 12↓ | 42*W 21↑ 21↓ | 72*W 36↑ 36↓
Control DIG On-Off | TRIAC | DIM 1-10V | NMX DMX Ready | DALI


Photometry & Performance

*For RGBW variations only

Light Source LED COB | LED SMD *
Delivered Output Single Color 720 | 1440 | 2340 | 3240lm
RGBW 560 | 840 | 1470 | 2520lm
Luminaire Efficacy 90lm/W | RGBW 35lm/W
CRI 80
CCT



Beam Angle

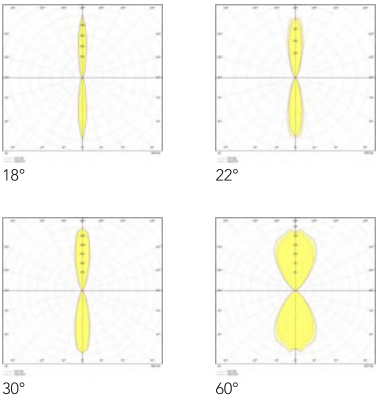

Accessories

Included	Control Gear
Sold Separately	Snoot
	Honeycomb Louvre
	Filter

* see details on page 79

Certifications & Standards

CE
RoHS
LM80
IEC61347

Product Code

*Parameters not **interselectable**. Each dimension to be matched with corresponding output
**For RGBW variations only

P	D	W	WM	DM*	B	T	65	OUT*	CT	BM	CON
Family	Sub	Product	Mounting	Dimension	Body	Diffuser	IP	Output	CCT	Beam	Control
				16 160mm	B Black Matt			720 720lm	27 2700K	18 18deg	DIG On-Off
				18 180mm	W White Matt			144 1440lm	30 3000K	22 22deg	TRI TRIAC
				24 240mm				234 2340lm	40 4000K	30 30deg	DIM 1-10V
				28 280mm				324 3240lm	50 5000K	60 60deg	NMX DMX
				16 160mm				560 560lm	65 6500K		Ready**
				18 180mm				840 840lm	RW RGBW**		DAL DALI
				24 240mm				147 1470lm			
				28 280mm				252 2520lm			



pro wall snoot

pro wall snoot is an anti glare shield accessory used for wall items

PWSSMNOBNNONOTNONONOT

*sizes available on request

Body Color  Black

Body Material Aluminum



pro wall nail

pro wall nail is a slant anti glare shield accessory used for pro mono/ duo wall items

PWNSMNOBNNONOTNONONOT

*sizes available on request

Body Color  Black

Body Material Aluminum



pro wall snoot

pro wall snoot is an anti glare shield accessory used for wall items

PWSSMNOBNNONOTNONONOT

*sizes available on request

Body Color  Black

Body Material Aluminum



pro wall nail


pro wall nail is a slant anti glare shield accessory used for pro mono/ duo wall items

PWNSMNOBNNONOTNONONOT

*sizes available on request

Body Color  Black

Body Material Aluminum




pro wall honeycomb

pro wall honeycomb is a diffuser accessory that offers enhanced glare control and uniform light distribution

PWHSMNOBNNONOTNONONOT

*sizes available on request

Body Color  Black
Body Material Aluminum



pro wall filter

pro wall filter is a diffuser accessory that makes the light distribution softer

PWFSMNOTNNONOTNONONOT

*sizes available on request

Body Color  Transparent
Body Material Glass




pro wall film

pro wall film is an optical film accessory that helps spread LED light evenly, reducing glare and harsh spots

PWFSMNOCNNONOTNONONOT

*sizes available on request




Body Color  Clear
Body Material Polycarbonate

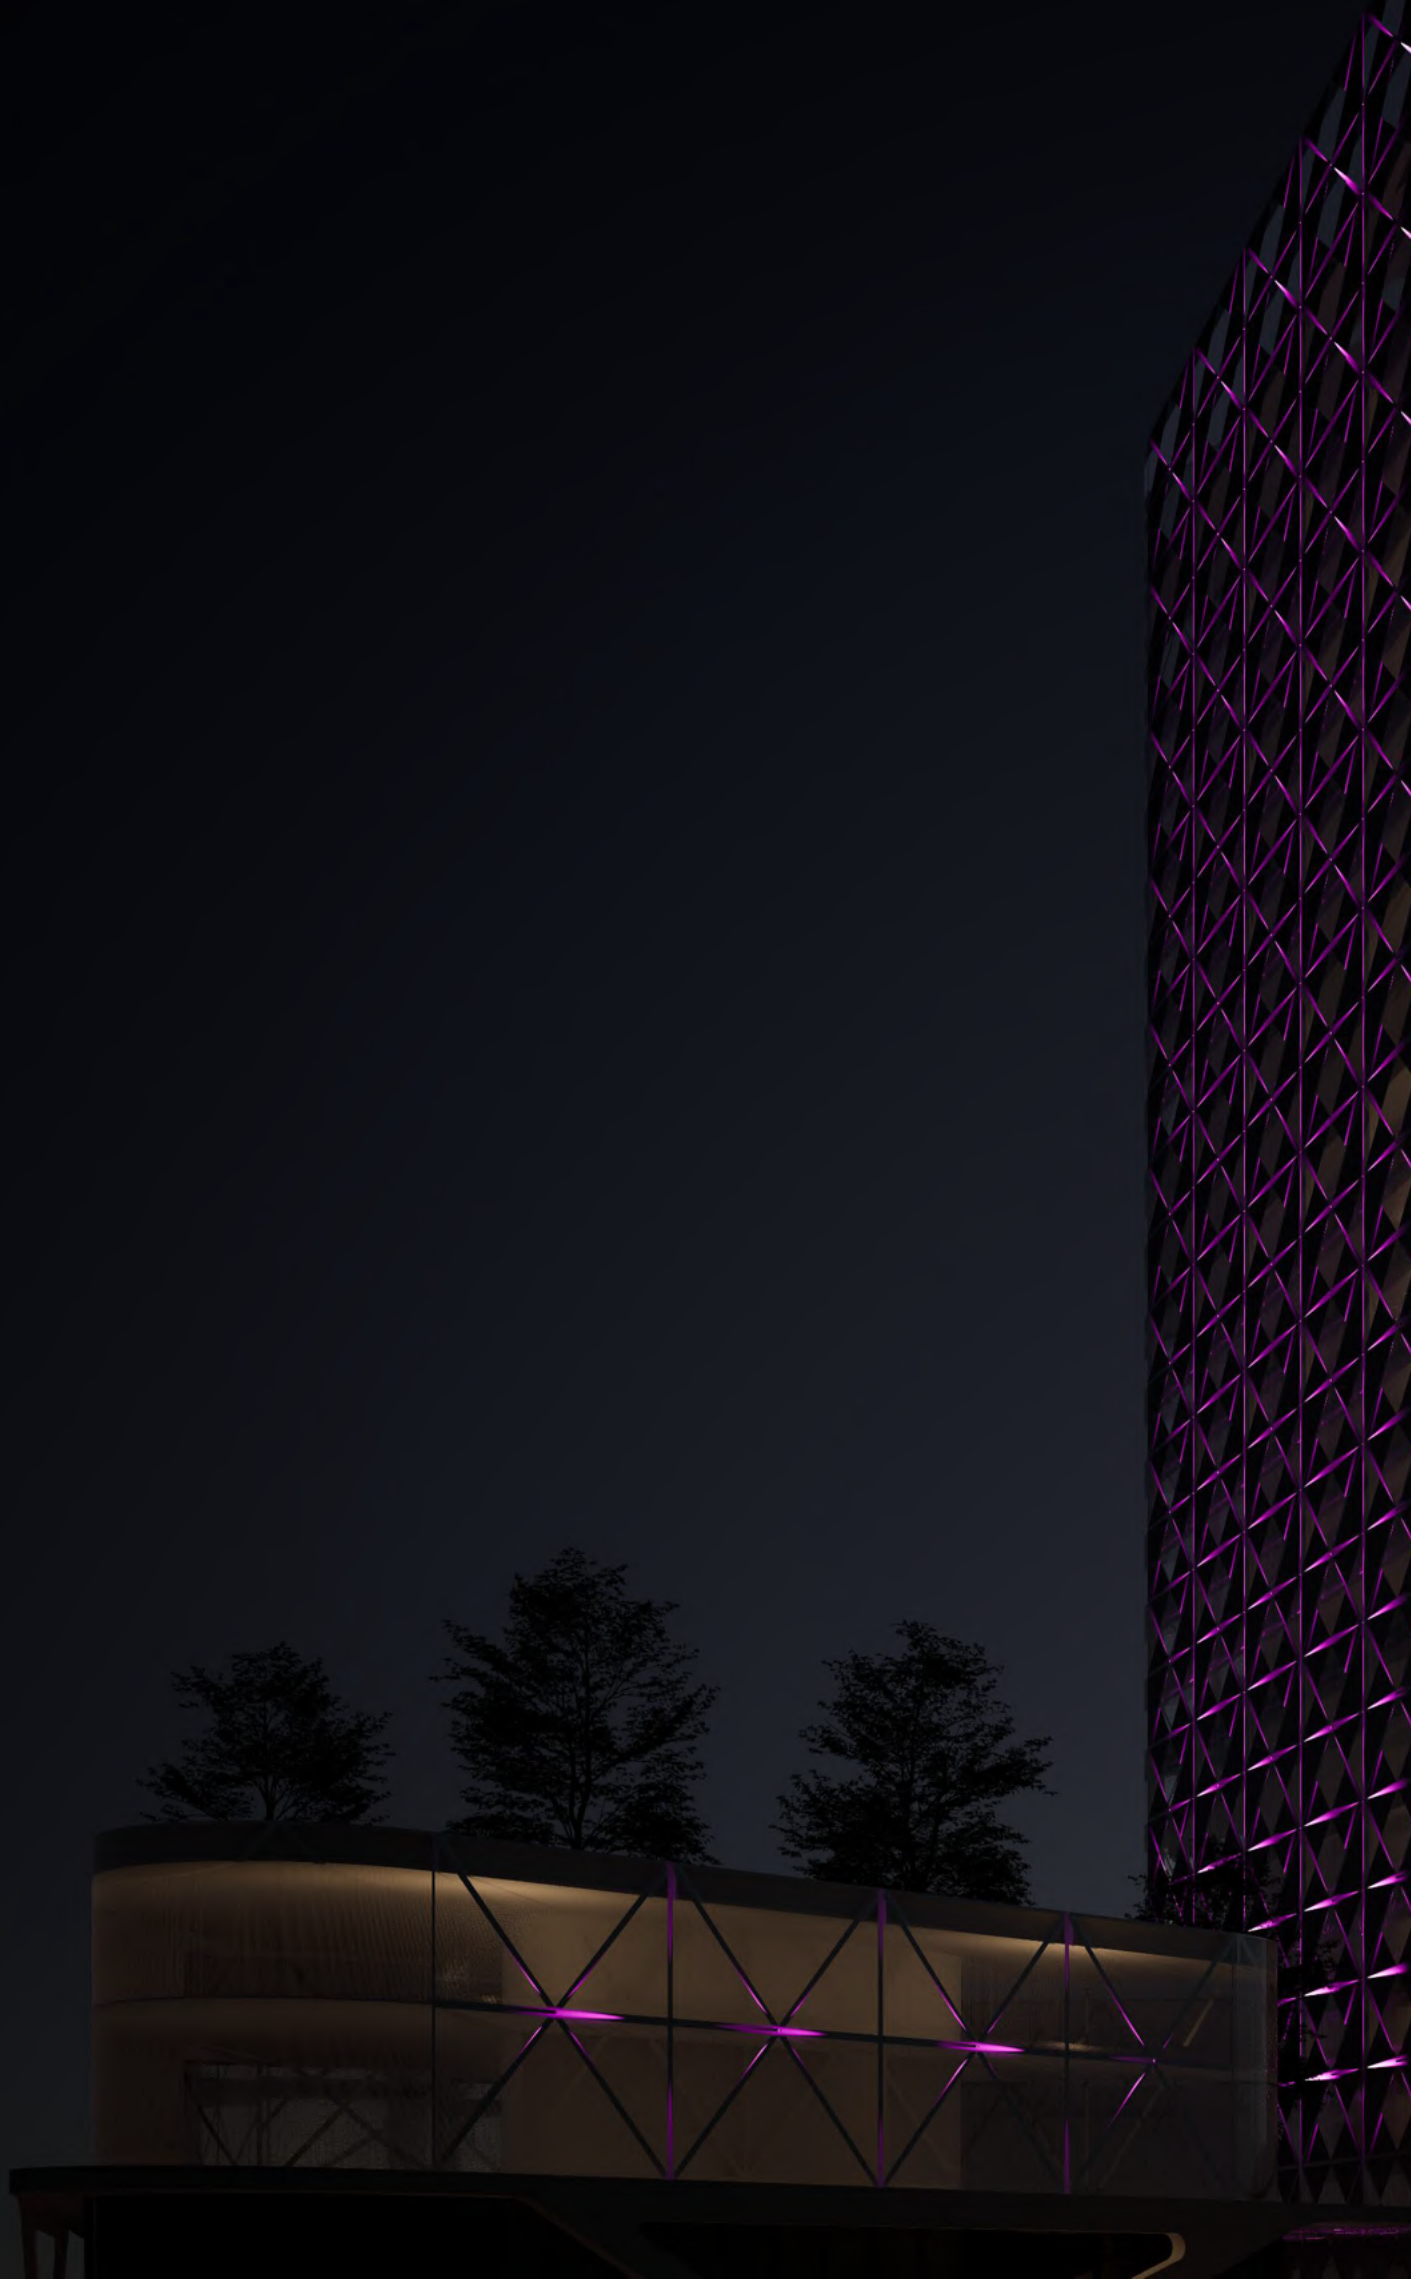

pro

cross wall

pro cross wall is a LED wall lamps that features its stylish design and excellent light effects, this fixture enhances various installation scenes. It features wide voltage input, energy-saving electronics, and supports DMX512

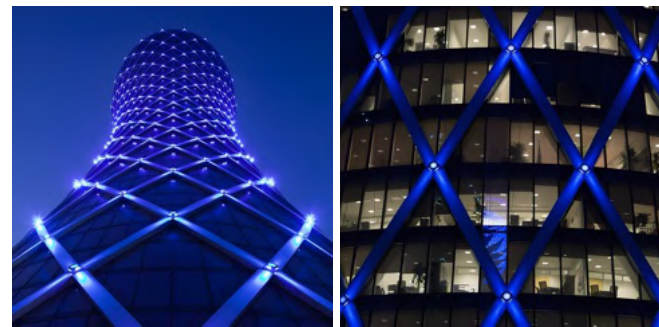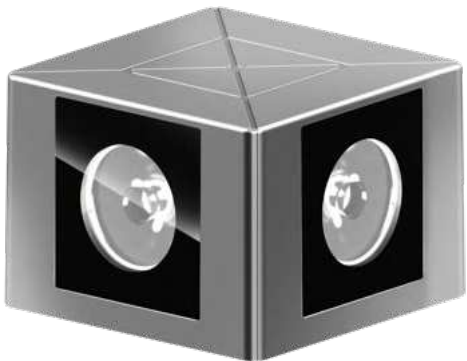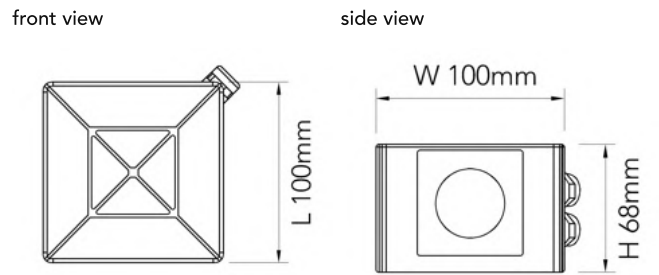

General Luminaire Data

*available upon request

Body Color



Diffuser Color



Body Material	Aluminum
Diffuser Material	Tempered Glass
Ingress Protection	66
Lifetime	50,000hrs

Electrical Characteristics


Voltage	220-240V 24V
Frequency	50-60Hz Not Applicable
Power Factor	0.9 Not Applicable
Protection	Class II Not Applicable
Wattage	Single Color 8W RGB 6W RGBW 12W Tunable White 8W
Control	DIG On-Off DIM 0-10V NMX DMX Ready DALI

Photometry & Performance


Light Source	LED SMD
Delivered Output	Single Color 480lm RGB 120lm RGBW 240lm Tunable White 160lm
Luminaire Efficacy	60lm/W RGB 20lm/W RGBW 20lm/W TW 20lm/W

CRI

CCT

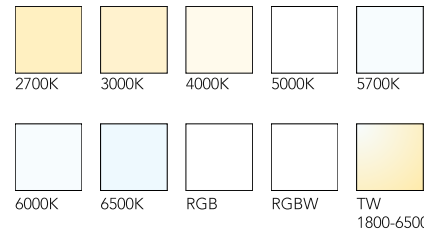


Beam Angle

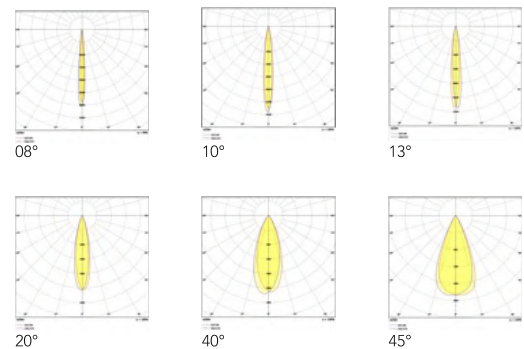

Accessories

Included	Control Gear
Sold Separately	Honeycomb Louvre
	Stainless Steel Chain



Certifications & Standards

CE
RoHS
LM80
IEC61347

pro cross honeycomb

pro cross honeycomb is a diffuser accessory that offers enhanced glare control and uniform light distribution

PCHSMNOBNNONOTNONONOT
*honeycomb available on request

Body Color  Black
Body Material Aluminum

pro cross chain

pro cross chain is a stainless steel anti-fall chain accessory used to support pro cross wall

PCCSMNOSNNONOTNONONOT
*stainless steel chain available on request

Body Color  Stainless Steel
Body Material Stainless Steel

Product Code					*For RGB variations only	**For RGBW variations only	***For Tunable White variations only				
P	C	W	WM	10	G	T	66	OUT	CT	BM	CON
Family	Sub	Product	Mounting	Dimension	Body	Diffuser	IP	Output	CCT	Beam	Control
								480 480lm	27 2700K	08 08deg	DIG On-Off
								120 120lm*	30 3000K	10 10deg	DIM 0-10V
								240 240lm**	40 4000K	13 13deg	NMX DMX
								160 160lm***	50 5000K	20 20deg	Ready*
									57 5700K	40 40deg	NMX DMX
									60 6000K	45 45deg	Ready**
									65 6500K		DAL DALI
									RG RGB*		
									RW RGBW**		
									TU Tunable		
									1800-6500K***		

pro




cross wall

pro cross wall is a LED wall lamps that features its stylish design and excellent light effects, this fixture enhances various installation scenes. It features wide voltage input, energy-saving electronics, and supports DMX512



front view

side view

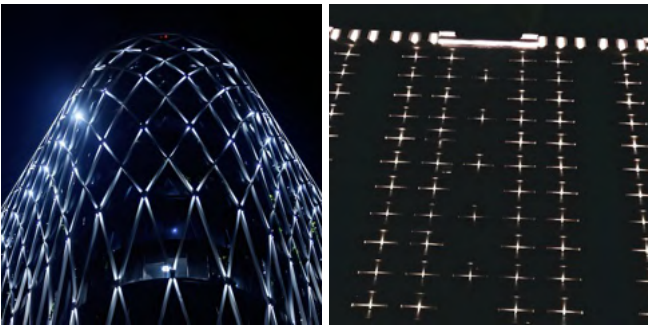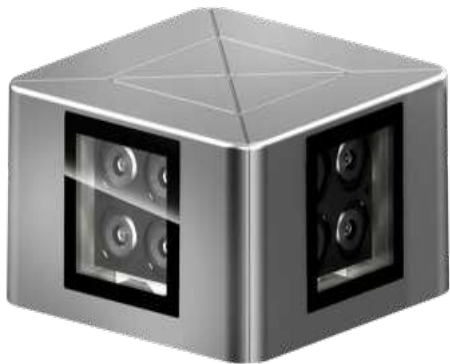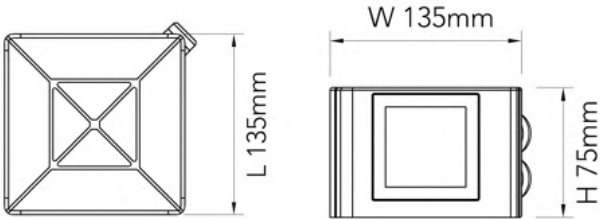

General Luminaire Data

*available upon request

Body Color



Diffuser Color



Body Material	Aluminum
Diffuser Material	Tempered Glass
Ingress Protection	66
Lifetime	50,000hrs

Electrical Characteristics

Voltage	220-240V 24V
Frequency	50-60Hz Not Applicable
Power Factor	0.9 Not Applicable
Protection	Class II Not Applicable
Wattage	Single Color 24W RGB 36W RGBW 48W Tunable White 24W
Control	DIG On-Off DIM 0-10V NMX DMX Ready DALI


Photometry & Performance

Light Source	LED SMD
Delivered Output	Single Color 1440lm RGB 720lm RGBW 960lm Tunable White 480lm
Luminaire Efficacy	60lm/W RGB 20lm/W RGBW 20lm/W TW 20lm/W


CRI

90

CCT

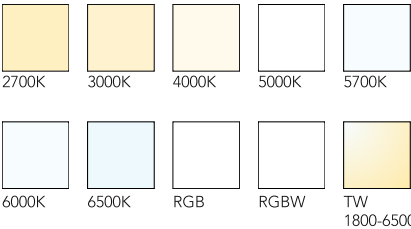


Beam Angle

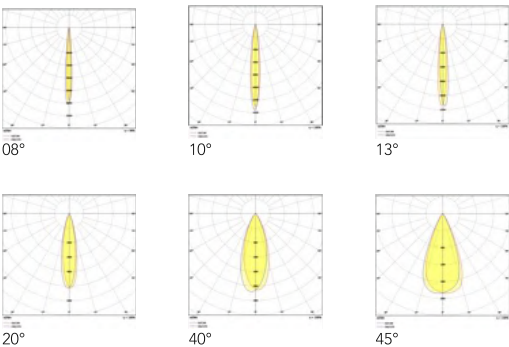

Accessories

Included	Control Gear
Sold Separately	Honeycomb Louvre
	Stainless Steel Chain



Certifications & Standards

CE
RoHS
LM80
IEC61347

pro cross honeycomb

pro cross honeycomb is a diffuser accessory that offers enhanced glare control and uniform light distribution

PCHSMNOBNNONOTNONONOT
*honeycomb available on request

Body Color  Black
Body Material Aluminum

pro cross chain

pro cross chain is a stainless steel anti-fall chain accessory used to support pro cross wall

PCCSMNOSNNONOTNONONOT
*stainless steel chain available on request

Body Color  Stainless Steel
Body Material Stainless Steel

Product Code					*For RGB variations only	**For RGBW variations only	***For Tunable White variations only				
P	C	W	WM	13	G	T	66	OUT	CT	BM	CON
Family	Sub	Product	Mounting	Dimension	Body	Diffuser	IP	Output	CCT	Beam	Control
								144 1440lm	27 2700K	08 08deg	DIG On-Off
								720 720lm*	30 3000K	10 10deg	DIM 0-10V
								960 960lm**	40 4000K	13 13deg	NMX DMX
								480 480lm***	50 5000K	20 20deg	Ready*
									57 5700K	40 40deg	NMX DMX
									60 6000K	45 45deg	Ready**
									65 6500K		DAL DALI
									RG RGB*		
									RW RGBW**		
									TU Tunable		
									1800-6500K***		




framers

introducing our exceptional collections of outdoor framers designed to enhance architectural aesthetics and functionality. Perfect for accentuating window spaces, it provides uniform illumination with minimal glare, creating a warm and inviting ambiance

featuring a durable construction, and easy installation, this luminaire is ideal for residential, commercial, and hospitality applications. With long-lasting LED technology, it ensures low power consumption and maintenance-free operation, making it a smart choice for modern lighting design



multiple color
finish



enhanced
aesthetics



multiple CCTs



durable body
material



High CRI

color rendering
index



Dimmable

multiple
dimming
options



pro


frame linear

pro frame linear features a sleek, line-driven design with a hidden mounting bracket for a seamless look. It supports DMX512, offers wide voltage input, energy-efficient electronics, multi-bit brightness adjustment, built-in lighting modes, and automatic coding



side view

side view

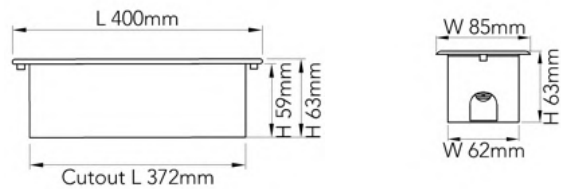

General Luminaire Data

*available upon request

Body Color



Diffuser Color



Body Material	Aluminum
Diffuser Material	Tempered Glass
Ingress Protection	66
Lifetime	50,000hrs


Electrical Characteristics

Voltage	220-240V 24V
Frequency	50-60Hz Not Applicable
Power Factor	0.9 Not Applicable
Protection	Class II Not Applicable
Wattage	Single Color 12 20W RGB 15W RGBW 20W Tunable White 20W
Control	DIG On-Off DIM 1-10V NMX DMX Ready DALI

Photometry & Performance

Light Source	LED SMD
Delivered Output	Single Color 720 1200lm RGB 300lm RGBW 400lm Tunable White 400lm
Luminaire Efficacy	60lm/W RGB 20lm/W RGBW 20lm/W TW 20lm/W
CRI	90
CCT	2700K 3000K 4000K 5000K 5700K 6000K 6500K RGB RGBW TW 1800-6500K

Beam Angle



Accessories

Included	Control Gear
	Mounting Box
Sold Separately	Optical Film
	Stainless Steel Anti-Fall Chain



Certifications & Standards

CE
RoHS
LM80
IEC61347

pro frame film

pro frame film is an optical film used to corrects mixed or stray light and ensures the desired angle when secondary optics are insufficient

PFFSMNOTNNONOTNONONOT
*tertiary optics available on request

Body Color  Transparent
Body Material Polycarbonate

pro frame chain

pro frame chain is a stainless steel anti-fall chain accessory used to support pro frame items

PFCSMNOSNNONOTNONONOT
*stainless steel chain available on request

Body Color  Stainless Steel
Body Material Stainless Steel

Product Code

*For RGB variations only **For RGBW variations only ***For Tunable White variations only

P	F	L	SR	40	G	T	66	OUT	CT	06	CON
Family	Sub	Product	Mounting	Dimension	Body	Diffuser	IP	Output	CCT	Beam	Control
								720 720lm	27 2700K		DIG On-Off
								120 1200lm	30 3000K		DIM 0-10V
								300 300lm*	40 4000K		NMX DMX
								400 400lm**	50 5000K		Ready*
								400 400lm***	57 5700K		NMX DMX
									60 6000K		Ready**
									65 6500K		DAL DALI
									RG RGB*		
									RW RGBW**		
									TU Tunable		
									1800-6500K***		

Accessories

Included	Control Gear
Sold Separately	Optical Film
	Stainless Steel Anti-Fall Chain



Certifications & Standards

CE
RoHS
LM80
IEC61347

pro frame film

pro frame film is an optical film used to corrects mixed or stray light and ensures the desired angle when secondary optics are insufficient

PFFSMNOTNNONOTNONONOT
*tertiary optics available on request

Body Color  Transparent
Body Material Polycarbonate

pro frame chain

pro frame chain is a stainless steel anti-fall chain accessory used to support pro frame items

PFCSMNOSNNONOTNONONOT
*stainless steel chain available on request

Body Color  Stainless Steel
Body Material Stainless Steel

Product Code					*For RGB variations only		**For RGBW variations only		***For Tunable White variations only		
P	F	L	SM	30	G	T	66	OUT	CT	06	CON
Family	Sub	Product	Mounting	Dimension	Body	Diffuser	IP	Output	CCT	Beam	Control
								720 720lm	27 2700K		DIG On-Off
								120 1200lm	30 3000K		DIM 0-10V
								300 300lm*	40 4000K		NMX DMX
								400 400lm**	50 5000K		Ready*
								400 400lm***	57 5700K		NMX DMX
									60 6000K		Ready**
									65 6500K		DAL DALI
									RG RGB*		
									RW RGBW**		
									TU Tunable		
									1800-6500K***		

pro

frame corner

pro frame corner is a window sill luminaire with a sleek, line-inspired design, this light fits perfectly into any installation scene. The hidden mounting bracket offers seamless integration into windowsills. It features wide voltage input, energy-efficient electronics, and supports DMX512



surface
mounted



architectural
outdoor



residential



commercial





landscape

top view



side view



General Luminaire Data

*available upon request

Body Color



grey



any other
RAL colors *

Diffuser Color



transparent

Body Material

Aluminum

Diffuser Material

Tempered Glass

Ingress Protection

66

Lifetime

50,000hrs

Electrical Characteristics

Voltage

220-240V | 24V

Frequency

50-60Hz | Not Applicable

Power Factor

0.9 | Not Applicable

Protection

Class II | Not Applicable

Wattage

Single Color 12 | 20W

RGB 15W

RGBW 20W

Tunable White 20W

Control

DIG On-Off | DIM 1-10V | NMX DMX Ready |

DALI

Photometry & Performance

Light Source

LED SMD

Delivered Output

Single Color 720 | 1200lm

RGB 300lm

RGBW 400lm

Tunable White 400lm

Luminaire Efficacy

60lm/W | RGB 20lm/W | RGBW 20lm/W |

TW 20lm/W

CRI

90

CCT



2700K



3000K



4000K



5000K



5700K



6000K



6500K



RGB




RGBW



TW
1800-6500K

Beam Angle



06 x 110°

Accessories

Included	Control Gear
Sold Separately	Flat Mounted Bracket
	Optical Film
	Stainless Steel Anti-Fall Chain



Certifications & Standards

CE
RoHS
LM80
IEC61347

pro frame bracket

pro frame bracket is an optional flat mounted bracket accessory used to support pro framer corner on surface mounted installation

PFBSMNOGNNONOTNONONOT
*flat mounted bracket available on request

Body Color  Grey
Body Material Aluminum

pro frame film

pro frame film is an optical film used to corrects mixed or stray light and ensures the desired angle when secondary optics are insufficient

PFFSMNOTNNONOTNONONOT
*tertiary optics available on request

Body Color  Transparent
Body Material Polycarbonate

pro frame chain

pro frame chain is a stainless steel anti-fall chain accessory used to support pro frame items

PFCSMNOSNNONOTNONONOT
*stainless steel chain available on request

Body Color  Stainless Steel
Body Material Stainless Steel

Product Code					*For RGB variations only	**For RGBW variations only	***For Tunable White variations only				
P	F	C	SM	243	G	T	66	OUT	CT	06	CON
Family	Sub	Product	Mounting	Dimension	Body	Diffuser	IP	Output	CCT	Beam	Control
								720 720lm	27 2700K		DIG On-Off
								120 1200lm	30 3000K		DIM 0-10V
								300 300lm*	40 4000K		NMX DMX
								400 400lm**	50 5000K		Ready*
								400 400lm***	57 5700K		NMX DMX
									60 6000K		Ready**
									65 6500K		DAL DALI
									RG RGB*		
									RW RGBW**		
									TU Tunable		
									1800-6500K***		

pro

frame wedge

pro frame wedge features a sleek crescent design, offering a compact and unobtrusive appearance that seamlessly blends into various installation settings. Its wide voltage input ensures compatibility with a range of power sources, while the precise electronic scheme delivers powerful performance while maintaining energy efficiency



surface mounted



architectural outdoor



residential




commercial





landscape

top view



side view

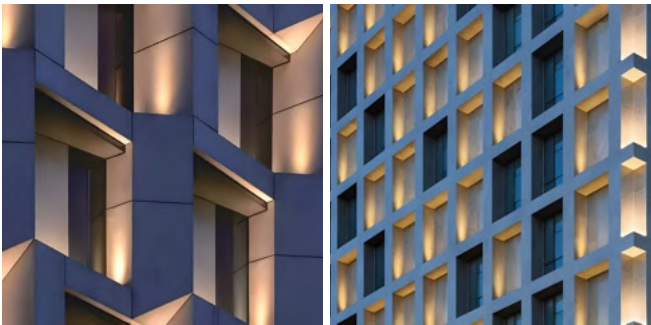

General Luminaire Data

*available upon request

Body Color



grey



any other RAL colors *

Diffuser Color



transparent

Body Material

Aluminum

Diffuser Material

Tempered Glass

Ingress Protection

66

Lifetime

50,000hrs

Electrical Characteristics

Voltage

220-240V | 24V

Frequency

50-60Hz | Not Applicable

Power Factor

0.9 | Not Applicable

Protection

Class II | Not Applicable

Wattage

12 | 18W

Control

DIG On-Off | DIM 1-10V | NMX DMX Ready | DALI

Photometry & Performance

Light Source

LED SMD

Delivered Output

Single Color 720 | 1080lm

RGB 360lm

Luminaire Efficacy

60lm/W | RGB 20lm/W

CRI

90

CCT



2700K



3000K



4000K



5000K



5700K



6000K




6500K



RGB

Beam Angle



04 x 180°

Accessories

Included	Control Gear
Sold Separately	Stainless Steel Anti-Fall Chain



Certifications & Standards

CE
RoHS
LM80
IEC61347

pro frame chain

pro frame chain is a stainless steel anti-fall chain accessory used to support pro frame items

PFCSMNOSNNONOTNONONOT
*stainless steel chain available on request

Body Color  Stainless Steel
Body Material Stainless Steel

Product Code

*For RGB variations only

P	F	W	SM	13	G	T	66	OUT	CT	04	CON
Family	Sub	Product	Mounting	Dimension	Body	Diffuser	IP	Output	CCT	Beam	Control
								720 720lm	27 2700K		DIG On-Off
								108 1080lm	30 3000K		DIM 0-10V
								360 360lm*	40 4000K		NMX DMX
									50 5000K		Ready*
									57 5700K		DAL DALI
									60 6000K		
									65 6500K		
									RG RGB*		



grazers


introducing our exceptional collection of outdoor LED wall grazers, meticulously engineered to transform outdoor spaces with enduring elegance and cutting-edge innovation

these lighting marvels seamlessly blend classic aesthetics with advanced technology, creating an outdoor ambiance of unparalleled beauty

beyond their captivating design, these architectural outdoor wall grazers are champions of energy efficiency, casting an even wash of light that highlights architectural features and textures while reducing power consumption




durable body
material



wide range of
wattage



multiple CCTs



enhanced
aesthetics



diverse beam
angles



kick reflector





pro



linear graze

pro linear graze is a versatile linear LED wall washer/grazer. Its main applications include indoor and outdoor wall washing and wall grazing. It highlights the outlines of the architectural design of buildings



top view

side view

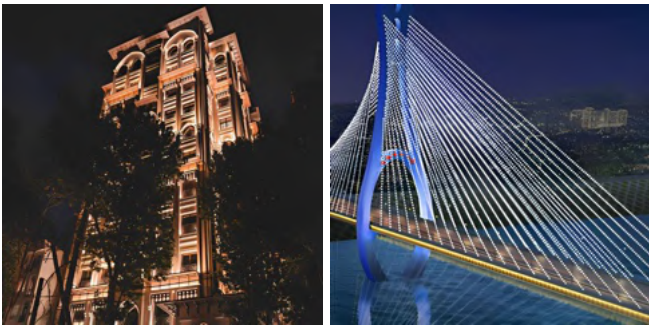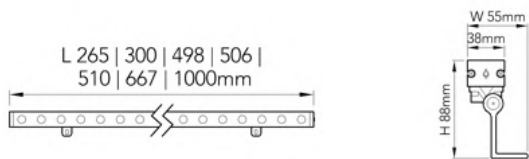

General Luminaire Data

*available upon request

Body Color



Diffuser Color



Body Material	Aluminum
Diffuser Material	Tempered Glass
Ingress Protection	66
Lifetime	50,000hrs

Electrical Characteristics

*available upon request

Voltage	24V 48V*
Wattage	Single Color 6 9 12 13.5 18 24 27 36W RGB 6 9 12 13.5 18 24 27 36W RGBW 6 9 12 13.5 18 24 27 36 48W Tunable White 6 9 12 13.5 18 24 27 36W
Control	NOT Included NMX DMX Ready NAL DALI Ready


Photometry & Performance

Light Source	LED SMD
Delivered Output	Single Color 528 792 1056 1188 1584 2112 2376 3168lm RGB 270 405 540 607 810 1080 1215 1620lm RGBW 270 405 540 607 810 1080 1215 1620 2160lm Tunable White 270 405 540 607 810 1080 1620lm
Luminaire Efficacy	88lm/W RGB 45lm/w RGBW 45lm/w TW 45lm/W


CRI

90

CCT

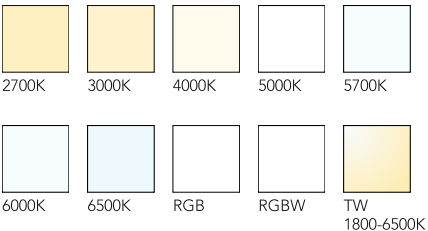

Beam Angle

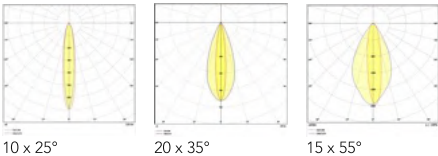

Accessories		Certifications & Standards
Included	Control Gear	CE RoHS LM80 IEC61347
	Bracket	
	Screws	
Sold Separately	Optical Films	
	Anti-glare Cover	
	Louvre	
	Stainless Steel Chain	

single color & tunable white
variations

Product Code											*Parameters not interselectable . Each dimension to be matched with corresponding output **For Tunable White variations only
P	L	G	SM	DM*	G	T	66	OUT*	CT	BM	CON
Family	Sub	Product	Mounting	Dimension	Body	Diffuser	IP	Output	CCT	Beam	Control
				26 265mm				792 792lm	27 2700K	10 10deg	NOT Included
				30 300mm				528 528lm	30 3000K	25 25deg	NAL DALI
				30 300mm				792 792lm	35 3500K	45 45deg	Ready
				49 498mm				792 792lm	40 4000K	60 60deg	
				49 498mm				118 1188lom	50 5000K	10 10x25	
				50 506mm				105 1056lm	57 5700K	15 15x30	
				50 506mm				211 2112lm	60 6000K	15 15x55	
				51 510mm				158 1584lm	65 6500K	20 20x35	
				10 1000mm				158 1584lm	TU Tunable		
				10 1000mm				211 2112lm	1800-6500K**		
				10 1000mm				237 2376lm			
				10 1000mm				316 3168lm			
				30 300mm				270 270lm**			
				30 300mm				405 405lm**			
				49 498mm				405 405lm**			
				49 498mm				607 607lm**			
				50 506mm				540 540lm**			
				50 506mm				108 1080lm**			
				10 1000mm				810 810lm**			
				10 1000mm				108 1080lm**			
				10 1000mm				121 1215lm**			
				10 1000mm				162 1620lm**			


RGB

variations

Product Code					*Parameters not interselectable . Each dimension to be matched with corresponding output						
P	L	G	SM	DM*	G	T	66	OUT*	RG	BM	NMX
Family	Sub	Product	Mounting	Dimension	Body	Diffuser	IP	Output	CCT	Beam	Control
				30 300mm				270 270lm		10 10deg	
				30 300mm				405 405lm		25 25deg	
				50 506mm				405 405lm		45 45deg	
				50 506mm				607 607lm		60 60deg	
				66 667mm				540 540lm		10 10x25	
				66 667mm				108 1080lm		15 15x30	
				10 1000mm				810 810lm		15 15x55	
				10 1000mm				108 1080lm		20 20x35	
				10 1000mm				121 1215lm			
				10 1000mm				162 1620lm			

RGBW
variations

Product Code					*Parameters not interselectable . Each dimension to be matched with corresponding output						
P	L	G	SM	DM*	G	T	66	OUT*	RW	BM	NMX
Family	Sub	Product	Mounting	Dimension	Body	Diffuser	IP	Output	CCT	Beam	Control
				30 300mm				270 270lm		10 10deg	
				30 300mm				470 470lm		25 25deg	
				30 300mm				540 540lm		45 45deg	
				50 506mm				405 405lm		60 60deg	
				50 506mm				607 607lm		10 10x25	
				50 506mm				810 810lm		15 15x30	
				66 667mm				540 540lm		15 15x55	
				66 667mm				108 1080lm		20 20x35	
				66 667mm				162 1620lm			
				10 1000mm				810 810lm			
				10 1000mm				108 1080lm			
				10 1000mm				121 1215lm			
				10 1000mm				162 1620lm			
				10 1000mm				216 2160lm			





pro linear cover

pro linear cover is an anti-glare cover used to cover light source and to help direct light to desired angle

W 56mm PLCSM56GNNONOTNONONOT

Body Color  Grey
Body Material Aluminum




pro linear radial

pro linear radial is a radial louvre used to prevent glare when installed in a low place

W 57mm PLRSM57GNNONOTNONONOT

Body Color  Grey
Body Material Aluminum



pro linear louvre

pro linear louvre is a glare accessory used to control light distribution, reduce glare, and enhance visual comfort.

W 58mm PLLSM58BNNONOTNONONOT

Body Color  Black
Body Material Polycarbonate



pro linear film

pro linear film is an optical film used to corrects mixed or stray light and ensures the desired angle when secondary optics are insufficient

PLFSMNOTNNONOTNONONOT
*tertiary optics available on request

Body Color  Transparent
Body Material Polycarbonate



pro linear chain

pro linear chain is an anti-fall chain accessory used to prevents the bracket from falling and secures pro linear graze to reduce drop risk

PLCSMNOSNNONOTNONONOT

*stainless steel chain available on request

Body Color  Stainless Steel

Body Material Stainless Steel

pro

modular graze

pro modular graze is a unique modular linear LED wall grazer which can be adjusted or curved perfect for any positioning options. It creates a graze effect ideal for highlighting external outlines of curved or irregular-shapes façades



surface mounted



architectural outdoor



façade



commercial





landscape



top view

side view



General Luminaire Data

Body Color	 RAL 9023
Diffuser Color	 transparent
Body Material	Aluminum
Diffuser Material	Glass
Ingress Protection	66
Lifetime	50,000hrs


Electrical Characteristics

Voltage	100-240V
Frequency	50-60Hz
Power Factor	0.9
Protection	Class II
Wattage	12 15 24 30 36 45 48 60 72 75 90W
Control	DIG On Off

Photometry & Performance


Light Source	LED SMD
Delivered Output	1080 1350 2160 2700 3240 4050 4320 5400 6480 6750 8100lm
Luminaire Efficacy	90 lm/W
CRI	90
CCT	 2700K  3000K  3500K  4000K  5000K  6000K

Beam Angle

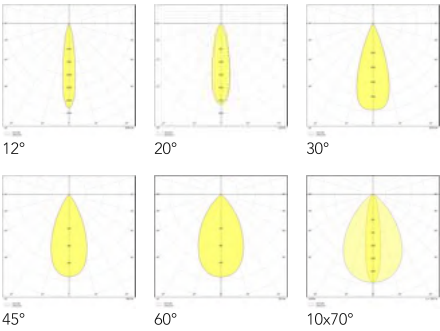

Accessories

Included	Control Gear
Sold Separately	Honeycomb Louvre
	Glare Cap

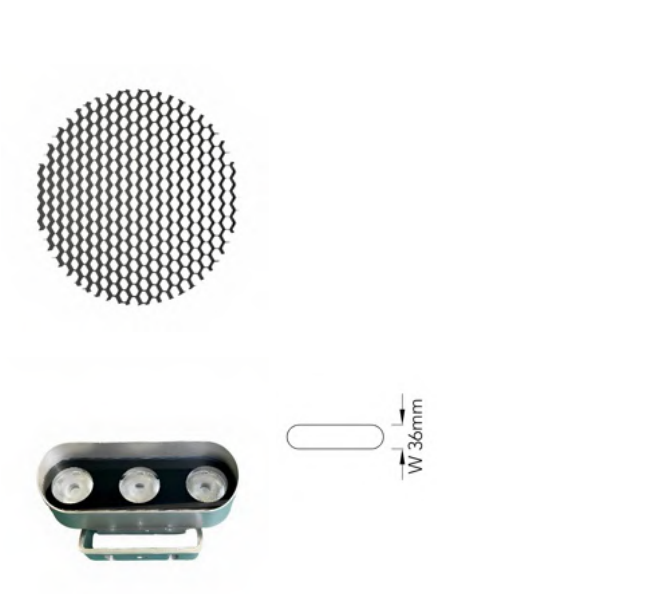

Certifications & Standards

CE
RoHS
LM80
IEC61347

pro acc honeycomb

pro acc honeycomb is a glare accessory in honeycomb design used for optimal glare control
L Not Applicable PAHSMNABNNONOTNONONOT

Body Color ■ Black
Body Material Aluminum

pro glare cap

pro glare cap is a glare accessory to be installed in pro modular graze to help with glare control
W 56mm PAGSM56RNNONOTNONONOT

Body Color ■ RAL 9023
Body Material Aluminum

Product Code					*Parameters not interselectable. Each dimension to be matched with corresponding output						
P	M	G	SM	DM*	R	T	66	OUT*	CT	BM	DIG
Family	Sub	Product	Mounting	Dimension	Body	Diffuser	IP	Output	CCT	Beam	Control
				16 166mm				108 1080lm	27 2700K	06 06deg	
				16 166mm				108 1350lm	30 3000K	12 12deg	
				33 337mm				216 2160lm	35 3500K	20 20deg	
				33 337mm				270 2700lm	40 4000K	30 30deg	
				50 508mm				324 3240lm	50 5000K	45 45deg	
				50 508mm				405 4050lm	60 6000K	60 60deg	
				67 679mm				432 4320lm		10 10*70	
				67 679mm				540 5400lm		05 05*20	
				85 850mm				540 5400lm			
				85 850mm				648 6480lm			
				10 1021mm				675 6750lm			
				10 1021mm				810 8100lm			

pro

modular graze

pro modular graze is a unique modular linear LED wall grazer which can be adjusted or curved perfect for any positioning options. It creates a graze effect ideal for highlighting external outlines of curved or irregular-shapes façades



surface mounted



architectural outdoor



façade



commercial





landscape



top view

side view



General Luminaire Data

Body Color	 RAL 9023
Diffuser Color	 transparent
Body Material	Aluminum
Diffuser Material	Glass
Ingress Protection	66
Lifetime	50,000hrs


Electrical Characteristics

Voltage	24V
Wattage	12 24 36 48 60 72 96 120 144W
Control	NMX DMX Ready

Photometry & Performance

Light Source	LED SMD
Delivered Output	480 960 1440 1920 2400 2880 3840 4800 5760lm
Luminaire Efficacy	40 lm/W
CRI	90
CCT	 RGBW

Beam Angle

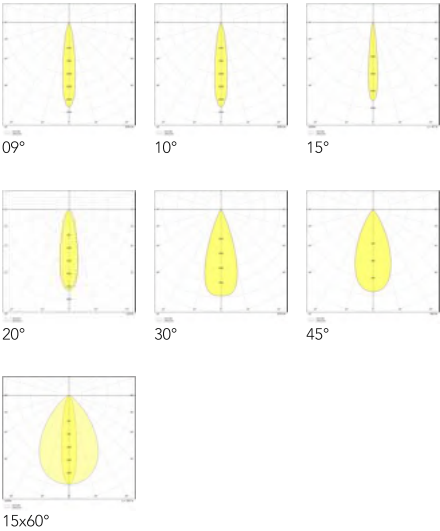


Accessories

- Sold Separately
- Control Gear

Honeycomb Louvre

Glare Cap

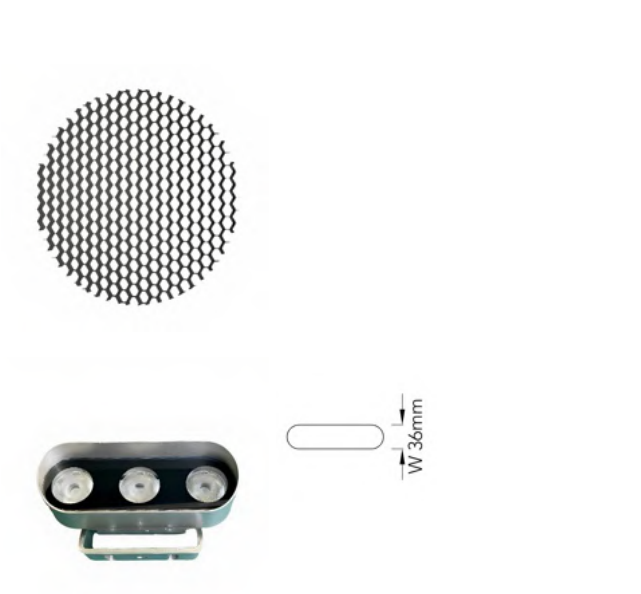

Certifications & Standards

CE
RoHS
LM80
IEC61347

pro acc honeycomb

pro acc honeycomb is a glare accessory in honeycomb design used for optimal glare control
L Not Applicable PAHSMNABNNONOTNONONOT

Body Color Black
Body Material Aluminum

pro glare cap

pro glare cap is a glare accessory to be installed in pro modular graze to help with glare control
W 56mm PAGSM56RNNONOTNONONOT

Body Color RAL 9023
Body Material Aluminum

Product Code *Parameters not **interselectable**. Each dimension to be matched with corresponding output

P	M	G	SM	DM*	R	T	66	OUT*	RW	BM	NMX
Family	Sub	Product	Mounting	Dimension	Body	Diffuser	IP	Output	CCT	Beam	Control
				16 166mm				480 480lm		09 09deg	
				16 166mm				960 960lm		10 10deg	
				33 337mm				960 960lm		15 15deg	
				33 337mm				192 1920lm		20 20deg	
				50 508mm				144 1440lm		30 30deg	
				50 508mm				288 2880lm		45 45deg	
				67 679mm				192 1920lm		15 15*60	
				67 679mm				384 3840lm			
				85 850mm				240 2400lm			
				85 850mm				480 4800lm			
				10 1021mm				288 2880lm			
				10 1021mm				576 5760lm			



king fahad cultural center

Riyadh, KSA



pro

chain graze

pro chain graze is a unique modular linear LED wall grazer which can be adjusted or curved perfect for any positioning options. It creates a graze effect ideal for highlighting external outlines of curved or irregular-shapes facades and coves. This can be controlled every 300mm (one pixel)



surface mounted



architectural outdoor



façade




commercial





landscape

top view



side view



General Luminaire Data

*MOQ 500 meters

Body Color



matt black



matt white*

Diffuser Color



transparent

Body Material

Polyurethane + Stainless Steel

Diffuser Material

PMMA

Ingress Protection

67

Lifetime

50,000hrs

Photometry & Performance

Light Source

LED SMD

Delivered Output

Single Color 3645lm

RGBW 1980lm

Luminaire Efficacy

81lm/W | RGBW 44lm/W

CRI

90

CCT



2700K



3000K



3500K



4000K




6500K




RGBW


Beam Angle




15°




20°



30°



20x40°



20x50°

Electrical Characteristics

Voltage

24V

Wattage

45W/m

Control

Not Included | NMX DMX Ready

Accessories

- Sold Separately
- Control Gear

Adjustable Holder

Strap



Certifications & Standards

CE
RoHS
LM80
IEC61347

pro chain holder

pro chain holder is an adjustable holder accessory used to rotate pro chain graze by 90°

H 64.07mm PCHSM64BNNONOTNONONOT

Body Color Black
Body Material Stainless Steel

pro chain strap

pro chain strap is a stainless steel strap accessory used to fixed pro chain graze in tree

L 230mm PCSSM23BNNONOTNONONOT

Body Color Black
Body Material Stainless Steel

Product Code

P **C** **G** **SM** **55** **B**
Family Sub Product Mounting Dimension Body

T
Diffuser

67
IP

OUT
Output
364 3645lm
198 1980lm*

CT
CCT
27 2700K
30 3000K
35 3500K
40 4000K
65 6500K
RW RGBW*

BM
Beam
15 15deg
20 20deg
30 30deg
20 20*40
20 20*50


CON
Control
NOT Included
NMX DMX Ready*

*For RGBW variations only

pro

flex graze

pro flex graze is a flexible modular LED light ideal for outdoor wall washing and wall grazing thanks to its precision optics. It can be easily positioned horizontally or vertically owing to its flexible feature

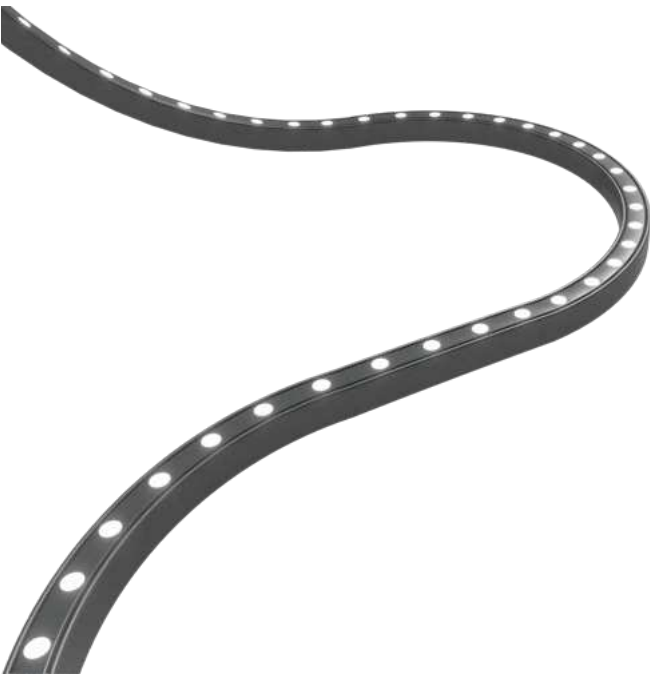

surface mounted



architectural outdoor



façade



commercial



landscape

top view

side view



General Luminaire Data

Body Color



grey

Diffuser Color



transparent

Body Material

Silicone

Diffuser Material

Silicone

Ingress Protection

65

Lifetime

50,000hrs

Photometry & Performance

Light Source

LED SMD

Delivered Output

Single Color 396 | 792 | 1188 | 1584lm

RGB 168 | 336 | 504lm

RGBW 282 | 564 | 846lm

Tunable White 396 | 792 | 1188 | 1584lm

Luminaire Efficacy

66lm/W | RGB 28lm/W | RGBW 47lm/W |

TW 66lm/W

CRI

80

CCT



2700K



3000K



4000K



5000K



5700K



6000K



6500K



RGB



RGBW



TW
1800-6500K

Electrical Characteristics

*available upon request

Voltage

24V | 48V *

Wattage

Single Color 6 | 12 | 18 | 24W

RGB 6 | 12 | 18W


RGBW 6 | 12 | 18W

Tunable White 6 | 12 | 18 | 24W


Control

Not Included | NMX DMX Ready


Beam Angle




15°




30°




50°



18 x 20°



20 x 35°



20 x 55°

Accessories

Sold Separately	Control Gear
	Waterproof Connectors
	Clips
	Brackets
	Profile

* see details on page 119

Certifications & Standards

CE
RoHS
LM80
IEC61347


Product Code

P		F	G	SM	10	G	T	65	OUT	CT	BM	CON
Family		Sub	Product	Mounting	Dimension	Body	Diffuser	IP	Output	CCT	Beam	Control
									396 396lm	27 2700K	15 15deg	NOT Included
									792 792lm	30 3000K	30 30deg	NMX DMX
									118 1188lm	40 4000K	50 50deg	Ready*
									158 1584lm	50 5000K	20 20*18	NMX DMX
									168 168lm*	57 5700K	35 35*20	Ready**
									336 336lm*	60 6000K	55 55*20	
									504 504lm*	65 6500K		
									282 282lm**	RG RGB*		
									564 564lm**	RW RGBW**		
									846 846lm**	TU Tunable		
									396 396lm***	1800-6500K***		
									792 792lm***			
									118 1188lm***			
									158 1584lm***			

*For RGB variations only

**For RGBW variations only

***For Tunable White variations only

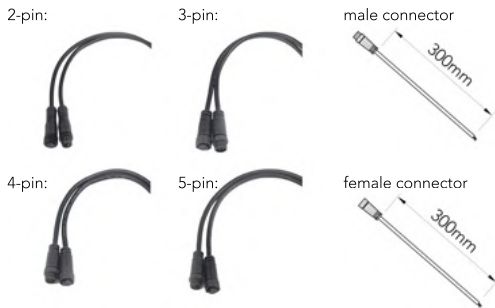


pro graze connector

pro graze connector is a male and female waterproof connector for pro flex graze items

L 300mm	PGCSM30BNNONOTNONODIG
L 300mm	PGCSM30BNNONOTNONODAL
L 300mm	PGCSM30BNNONOTRGNODMX
L 300mm	PGCSM30BNNONOTRWNODMX

Body Color  Black
Body Material PVC

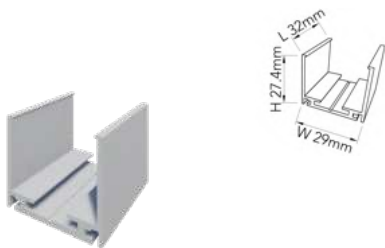


pro graze clip

pro graze clip is a aluminum clip accessory used to support pro flex graze on vertical positioning

W 10mm PGCSM10ANNONOTNONONOT

Body Color  Aluminum
Body Material Aluminum

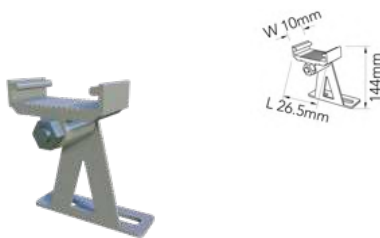


pro graze bracket

pro graze bracket is a mounting bracket accessory used to support pro flex graze on surface mounted installation

W 29mm PGBSM29SNNONOTNONONOT

Body Color  Stainless Steel
Body Material Stainless Steel

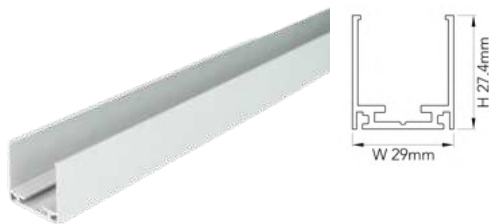

pro graze profile

pro graze profile is an aluminum profile that acts as protective housing for pro flex graze

W 29mm PGPSM29GNNONOTNONONOT

Body Color  Grey
Body Material Aluminum






floods

introducing our exceptional collection of outdoor LED floodlights, meticulously designed to elevate outdoor spaces with enduring elegance and advanced technology.

these products seamlessly blend classic aesthetics with advanced technology, creating an outdoor atmosphere of unmatched beauty. Apart from their captivating design, these architectural outdoor floodlights excel in energy efficiency, providing powerful illumination that highlights architectural details and textures



durable body
material



flexible
configuration



multiple CCTs



IP rating



diverse beam
angles



functional
lighting






pro

wash flood

pro wash flood is a projector LED flood light designed to meet relevant performance and standards for floodlighting applications. It features a variety of beam angles and color temperatures

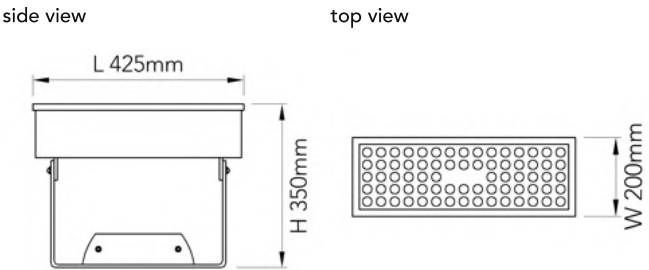

General Luminaire Data

*available upon request

Body Color		
	matt black	any other RAL colors *
Diffuser Color		transparent
Body Material	Aluminum	
Diffuser Material	Glass	
Ingress Protection	66	
Lifetime	50,000hrs	


Electrical Characteristics

Voltage	120-270V
Frequency	50-60Hz
Power Factor	0.9
Protection	Class II
Wattage	Single Color 144W
	RGB 180W
	RGBW 200W
Control	DIG On-Off TRIAC
	DGX DIG On-Off DMX Ready DALI

Photometry & Performance

Light Source	LED SMD
Delivered Output	Single Color 14500lm
	RGB 90000lm
	RGBW 10000lm
	Tunable White 10080lm
Luminaire Efficacy	100lm/W RGB 50lm/W RGBW 50lm/W
	TW 70lm/W

CRI	80			
				
CCT				
	RGB	RGBW	TW	2700-6000K

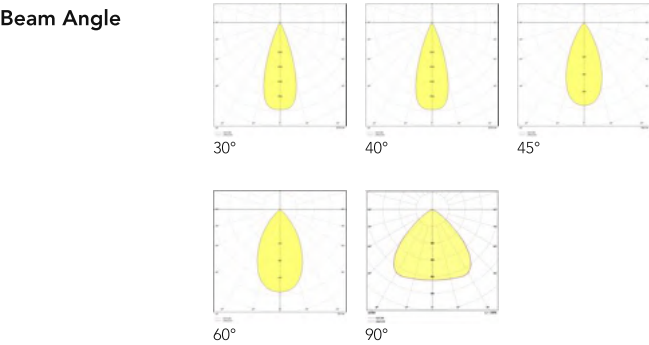


Accessories

- Included
- Control Gear

Honeycomb Louvre

Barndoor



Certifications & Standards

CE
RoHS
LM80
IEC61347

pro flood honeycomb

pro flood honeycomb is a honeycomb accessory design to used for optimal glare control

PFHSMNOBNNONOTNONONOT
*honeycomb available on request

Body Color Black
Body Material Aluminum

pro flood door

pro flood barndoor is an accessory used to control and direct the beam of light

PFDSMNOBNNONOTNONONOT
*barndoor available on request

Body Color Black
Body Material Aluminum

Product Code

P **W** **F** **SM** **42** **B**
Family Sub Product Mounting Dimension Body

T
Diffuser

66
IP

OUT*
Output
145 14500lm
145 14500lm
145 14500lm
145 14500lm
900 90000lm
110 11000lm
100 10080lm

CT*
CCT
27 2700K
30 3000K
40 4000K
60 6000K
RG RGB
RW RGBW
TU Tunable
2700-6000K

BM
Beam
30 30deg
40 40deg
45 45deg
60 60deg
90 90deg

CON
Control
DIG On-Off
TRI TRIAC
DGX DIG On-Off
DMX Ready**
DAL DALI

*Parameters not **interselectable**. Each dimension to be matched with corresponding output
**For Colored CCTs variations only

pro

disk flood

pro disk flood is a versatile, round-shaped LED floodlight designed for outdoor installations. Engineered for even light distribution and optimal illumination, it is ideal for enhancing façade and large outdoor areas, making it ideal for outdoor architectural lighting applications



surface mounted



architectural outdoor



façade




commercial





landscape

front view



side view



General Luminaire Data

*available upon request

Body Color



grey



any other RAL colors *

Diffuser Color



transparent

Body Material

Aluminum

Diffuser Material

Tempered Glass

Ingress Protection

66

Lifetime

50,000hrs

Electrical Characteristics

Voltage

100-240V

Frequency

50-60Hz

Power Factor

0.9

Protection

Class II

Wattage

100 | 120 | 135 | 150 | 180 | 200 | 220 | 240W

Control

DIG On-Off | DIM 1-10V |
DGX Dig On-Off DMX Ready | DALI

Photometry & Performance

Light Source

LED SMD

Delivered Output

Single Color 10000 | 12000 | 13500 | 15000 |
18000 | 20000 | 22000 | 24000lm

RGBW 6000 | 7200 | 8100 | 9000 | 10800 |
12000 | 13200 | 14400lm

Tunable White 10000 | 12000 | 13500 | 15000 |
18000 | 20000 | 22000 | 24000lm

Luminaire Efficacy

100lm/W | RGBW 60\m/W | TW 100lm/W

CRI

80

CCT



2700K



3000K



4000K



5000K



6500K




rgbw




Tunable
2700-6500K


Beam Angle



8°



60°



10x60°

Accessories

IncludedControl Gear

Certifications & Standards

CE
RoHS
LM80
IEC61347

Product Code

*Parameters not **interselectable**. Each dimension to be matched with corresponding output
For RGBW variations only *For Tunable White variations only

P	D	F	SM	DM*	G	T	66	OUT*	CT	BM	CON
Family	Sub	Product	Mounting	Dimension	Body	Diffuser	IP	Output	CCT	Beam	Control
				26 260mm				100 10000lm	27 2700K	08 08deg	DIG On-Off
				26 260mm				120 12000lm	30 3000K	60 60deg	DIM 1-10V
				30 300mm				135 13500lm	40 4000K	10 10x60	DGX DIG On-Off
				30 300mm				150 15000lm	50 5000K		DMX Ready**
				37 370mm				180 18000lm	65 6500K		DAL DALI
				37 370mm				200 20000lm	RW RGBW**		
				42 420mm				220 22000lm	TU Tunable		
				42 420mm				240 24000lm	2700-6500K***		
				26 260mm				600 6000lm**			
				26 260mm				720 7200lm**			
				30 300mm				810 8100lm**			
				30 300mm				900 9000lm**			
				37 370mm				108 10800lm**			
				37 370mm				120 12000lm**			
				42 420mm				132 13200lm**			
				42 420mm				144 14400lm**			
				26 260mm				100 10000lm***			
				26 260mm				120 12000lm***			
				30 300mm				135 13500lm***			
				30 300mm				150 15000lm***			
				37 370mm				180 18000lm***			
				37 370mm				200 20000lm***			
				42 420mm				220 22000lm***			
				42 420mm				240 24000lm***			

pro

proof flood


pro proof flood is a versatile round-shaped LED floodlight. It is designed and engineered to guarantee even light distribution and is best used to highlight the architectural aspects of building façades



front view



top view



General Luminaire Data

*available upon request

Body Color



Diffuser Color



Body Material Aluminum
Diffuser Material Glass
Ingress Protection 66
Lifetime 50,000hrs



Electrical Characteristics

Voltage 120-270V
Frequency 50-60Hz
Power Factor 0.9
Protection Class II
Wattage 18 | 36 | 48 | 72W
Control DIG On-Off | TRIAC |
DGX DIG On-Off DMX Ready | DALI


Photometry & Performance

Light Source LED SMD
Delivered Output Single Color 1620 | 3200 | 4300 | 6500lm
RGBW 900 | 1800 | 2400 | 3600lm
Tunable White 1260 | 2520 | 3360 | 5040lm

Luminaire Efficacy 90lm/W | RGBW 50lm/W | TW 70lm/W
CRI 80
CCT




Beam Angle

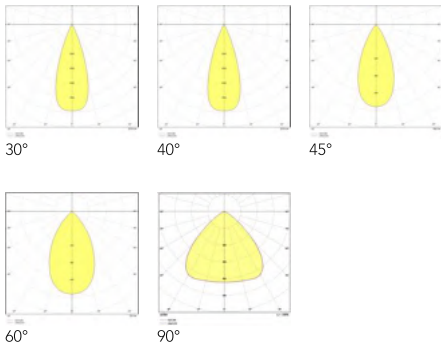

Accessories

- Included
- Control Gear

Honeycomb Louvre



Certifications & Standards

CE
RoHS
LM80
IEC61347

pro flood honeycomb

pro flood honeycomb is a honeycomb accessory design to used for optimal glare control

PFHSMNOBNNNONOTNOABNOT
*honeycomb available on request


Body Color Black
Body Material Aluminum

Product Code											*Parameters not interselectable . Each dimension to be matched with corresponding output	
											For RGBW variations only	*For Tunable White variations only
P	P	F	SM	DM*	G	T	66	OUT*	CT	BM	CON	
Family	Sub	Product	Mounting	Dimension	Body	Diffuser	IP	Output	CCT	Beam	Control	
				12 125 mm				162 1620lm	27 2700K	30 30deg	DIG On-Off	
				15 158mm				320 3200lm	30 3000K	40 40deg	TRI TRIAC	
				20 205mm				430 4300lm	40 4000K	45 45deg	DGX DIG On-Off	
				25 255mm				650 6500lm	60 6000K	60 60deg	DMX Ready**	
				12 125 mm				900 900lm**	RG RGB**	90 90deg	DAL DALI	
				15 158mm				180 1800lm**	RW RGBW**			
				20 205mm				240 2400lm**	TU Tunable			
				25 255mm				360 3600lm**	2700-6000K***			
				12 125 mm				126 1260lm***				
				15 158mm				252 2520lm***				
				20 205mm				336 3360lm***				
				25 255mm				504 5040lm***				

pro

cone flood

pro cone flood is engineered to guarantee visual comfort by avoiding unnecessary glare and is available in multiple light distribution options. It is suitable for various mounting options, thanks to its wide range of accessories

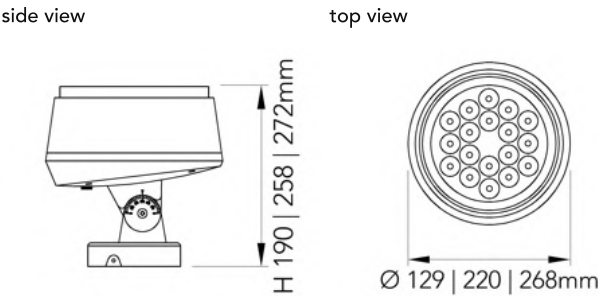

General Luminaire Data

Body Color	 matt black  matt white  grey  aluminum
Diffuser Color	 transparent
Body Material	Aluminum
Diffuser Material	Glass
Ingress Protection	66
Lifetime	50,000hrs


Electrical Characteristics

Voltage	120-270V
Frequency	50-60Hz
Power Factor	0.9
Protection	Class II
Wattage	18 25 40 60 75W
Control	DIG On-Off DIM 1-10V DGX DIG On-Off DMX Ready DALI

Photometry & Performance

Light Source	LED SMD
Delivered Output	Single Color 2430 3375 5400 8100 10125lm RGBW 900 1250 2000 3000 3750lm
Luminaire Efficacy	135lm/W RGBW 50lm/W
CRI	90
CCT	 3000K  4000K  5000K  5700K  RGBW

Beam Angle

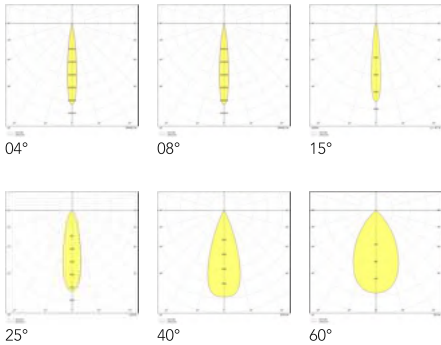

Accessories

Included	Control Gear
Sold Separately	Pole
	Pole Clamp
	Lens Plate
	Spill Ring
	Honeycomb Louvre

* see details on page 133

Certifications & Standards

CE
RoHS
LM80
IEC61347

Product Code

*Parameters not **interselectable**. Each dimension to be matched with corresponding output
**For RGBW variations only

P	C	F	SM	DM*	B	T	66	OUT*	CT	BM	CON
Family	Sub	Product	Mounting	Dimension	Body	Diffuser	IP	Output	CCT	Beam	Control
				12 129mm	B Black Matt			243 2430lm	30 3000K	04 04deg	DIG On-Off
				22 220mm	W White Matt			337 3375lm	40 4000K	08 08deg	DIM 1-10V
				22 220mm	G Grey			540 5400lm	50 5000K	15 15deg	DGX DIG On-Off
				26 268mm	A Aluminum			810 8100lm	57 5700K	25 25deg	DMX Ready**
				26 268mm				101 10125lm	RW RGBW**	40 40deg	DAL DALI
				12 129mm				900 900lm**		60 60deg	
				22 220mm				125 1250lm**			
				22 220mm				200 2000lm**			
				26 268mm				300 3000lm**			
				26 268mm				375 3750lm**			



pro cone extension

pro cone extension is a surface mounting accessory which helps pro cone flood be transformed into bollard lights

H 500mm PCESM50BNNONOTNONONOT

Body Color  Black
Body Material Iron



pro cone flange

pro cone flange is a clamp accessories used to install pro cone flood onto poles

Ø 120mm PCFPM12BNNONOTNONONOT

Body Color  Black
Body Material Aluminum




pro cone flange

pro cone flange is a clamp accessories used to install pro cone flood onto poles

Ø 120mm PCFPM12BNNONOTNONONOT

Body Color  Black
Body Material Aluminum




pro cone bracket

pro cone bracket is an alternative pole mount accessory used to install pro cone flood onto poles

Ø 48mm PCBPM48BNNONOTNONONOT

Body Color  Black
Body Material Aluminum





pro cone coupling

pro cone coupling is an alternative pole mount accessory used to install pro cone flood onto poles

Ø 48mm PCCPM48BNNONOTNONONOT

Body Color Black

Body Material Aluminum



pro cone plate

pro cone plate is a lens plate accessory used to control the light from the fixture


Ø 115mm PCPSM15BNNONOTNONONOT

Ø 198mm PCPSM19BNNONOTNONONOT

Ø 242mm PCPSM24BNNONOTNONONOT

Body Color Black

Body Material Aluminum





pro cone ring

pro cone ring is a spill ring accessory used to prevent spill lights from the fixture

Ø 198mm PCPSM19BNNONOTNONONOT

Body Color Black

Body Material Aluminum



pro cone honeycomb

pro cone honeycomb is a honeycomb accessory used for optimal glare control

H 03mm PAFSM03BNNONOTNONONOT

Body Color Black

Body Material Aluminum

pro square flood

pro square flood showcases a high-purity aluminum body, ensuring not only exceptional performance but also sleek aesthetics for outdoor installations. It offers versatility with a selection of beam angles and color temperatures



surface mounted



architectural outdoor



residential




commercial




landscape

side view



base view



General Luminaire Data

*available upon request

Body Color



black sandy matt



grey



any other RAL colors *

Diffuser Color



transparent

Body Material

Aluminum

Diffuser Material

Glass

Ingress Protection

66

Lifetime

50,000hrs

Photometry & Performance

*For RGB and RGBW variations only

Light Source

LED COB | LED SMD *

Delivered Output

Single Color 2400 | 4000 | 5200lm

RGB 900 | 1800 | 2160lm

RGBW 1260 | 2160 | 3240lm

Luminaire Efficacy

100lm/W | RGB30lm/W | RGBW 30lm/W

CRI

80

CCT



2700K



3000K



4000K



5000K



6500K




RGB




RGBW


Beam Angle




18°




30°




60°



90°



10 x 45°



20 x 65°

Electrical Characteristics

*For RGB and RGBW variations only

Voltage

220-240V | 24V *

Frequency

50-60Hz | Not Applicable

Power Factor

0.9 | Not Applicable

Protection

Class II | Not Applicable

Wattage

Single Color 24 | 40 | 52W

RGB 30 | 60 | 72W

RGBW 42 | 72 | 108W

Control


DIG On-Off | TRIAC | DIM 1-10V |

NMX DMX Ready * | DALI

Accessories

* see details on page 137

Included	Control Gear
Sold Separately	Snoot
	Honeycomb Louvre
	Filter
	Inground Stake

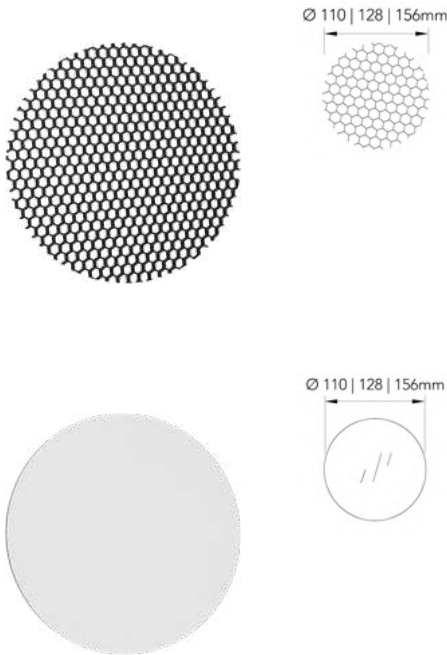

Certifications & Standards

CE
RoHS
LM80
IEC61347

pro square honeycomb

pro square honeycomb is a diffuser accessory that offers enhanced glare control and uniform light distribution

- Ø 110mm PSHSM11BNNONOTNONONOT
- Ø 128mm PSHSM12BNNONOTNONONOT
- Ø 156mm PSHSM15BNNONOTNONONOT

Body Color Black
Body Material Aluminum

pro spike filter

pro spike filter is a diffuser accessory that makes the light distribution softer

- Ø 110mm PSHSM11TNNONOTNONONOT
- Ø 128mm PSHSM12TNNONOTNONONOT
- Ø 156mm PSHSM15TNNONOTNONONOT

Body Color Transparent
Body Material Glass

Product Code

*Parameters not **interselectable**. Each dimension to be matched with corresponding output
For RGB variations only *For RGBW variations only

P	S	S	SM	DM*	B	T	66	OUT*	CT	BM	CON
Family	Sub	Product	Mounting	Dimension	Body	Diffuser	IP	Output	CCT	Beam	Control
				17 170mm	B Black Sandy			240 2400lm	27 2700K	03 03deg	DIG On-Off
				21 210mm	Matt			400 4000lm	30 3000K	05 05deg	TRI TRIAC
				26 260mm	G Grey			520 5200lm	40 4000K	08 08deg	DIM 1-10V
				17 170lm				900 900lm**	50 5000K	10 10deg	NMX DMX
				21 210lm				180 1800lm**	65 6500K	18 15deg	Ready**
				26 260lm				216 2160lm**	RG RGB**	24 24deg	NMX DMX
				17 170lm				126 1260lm***	RW RGBW***	30 30deg	Ready***
				21 210lm				216 2160lm***		38 36deg	DAL DALI
				26 260lm				324 3240lm***		40 40deg	
										60 60deg	
										90 90deg	
										10 10x45	
										20 20x65	



pro flood nail

pro flood nail is an anti glare shield accessory used for pro square flood

PFNSMNOBNNONOTNONONOT

*sizes available on request

Body Color  Black

Body Material Aluminum



pro flood stake

pro flood stake is a ground stake accessory used to support ground installation

L 215mm PFSIR21BNNONOTNONONOT

Body Color  Black

Body Material Polycarbonate



pro flood arm

pro flood arm is an extension arm to be combined with stake. Also can be directly connected to pro square flood

L 300mm PFAIR30BNNONOTNONONOT


L 500mm PFAIR50BNNONOTNONONOT

L 800mm PFAIR80BNNONOTNONONOT

L 1000mm PFAIR10BNNONOTNONONOT

Body Color  Black

Body Material Polycarbonate



pro flood pole

pro flood pole is an extension pole to be connected to pro square flood

L 300mm PFPIR30BNNONOTNONONOT


L 500mm PFPIR50BNNONOTNONONOT

L 800mm PFPIR80BNNONOTNONONOT

L 1000mm PFPIR10BNNONOTNONONOT

Body Color  Black

Body Material Polycarbonate




pro flood coupling

pro flood coupling is a pole mount accessory used to attach spike onto the pole

L 70mm PFCPM70BNNONOTNONONOT

Body Color Black
Body Material Aluminum




pro flood flange

pro flood flange is a pole mount accessory used to attach spike lights onto the pole

L 150mm PFFPM15BNNONOTNONONOT

Body Color Black
Body Material Aluminum



pro flood strap

pro flood strap is a pole mount accessory used to attach spike lights onto the pole

L 150mm PFSPM15BNNONOTNONONOT

Body Color Black
Body Material Aluminum




bollards and outdoor collections

our exceptional collections of bollards and outdoor lighting is meticulously designed to elevate outdoor spaces with enduring elegance and advanced functionality

these collections seamlessly blend classic aesthetics with advanced technology, creating an outdoor ambiance of unparalleled beauty. In addition to their captivating design, these collections champion energy efficiency, offering gentle yet sufficient illumination that enhances landscapes and pathways



durable body
material



enhanced
aesthetics



multiple CCTs




IP rating




low glare



functional
lighting

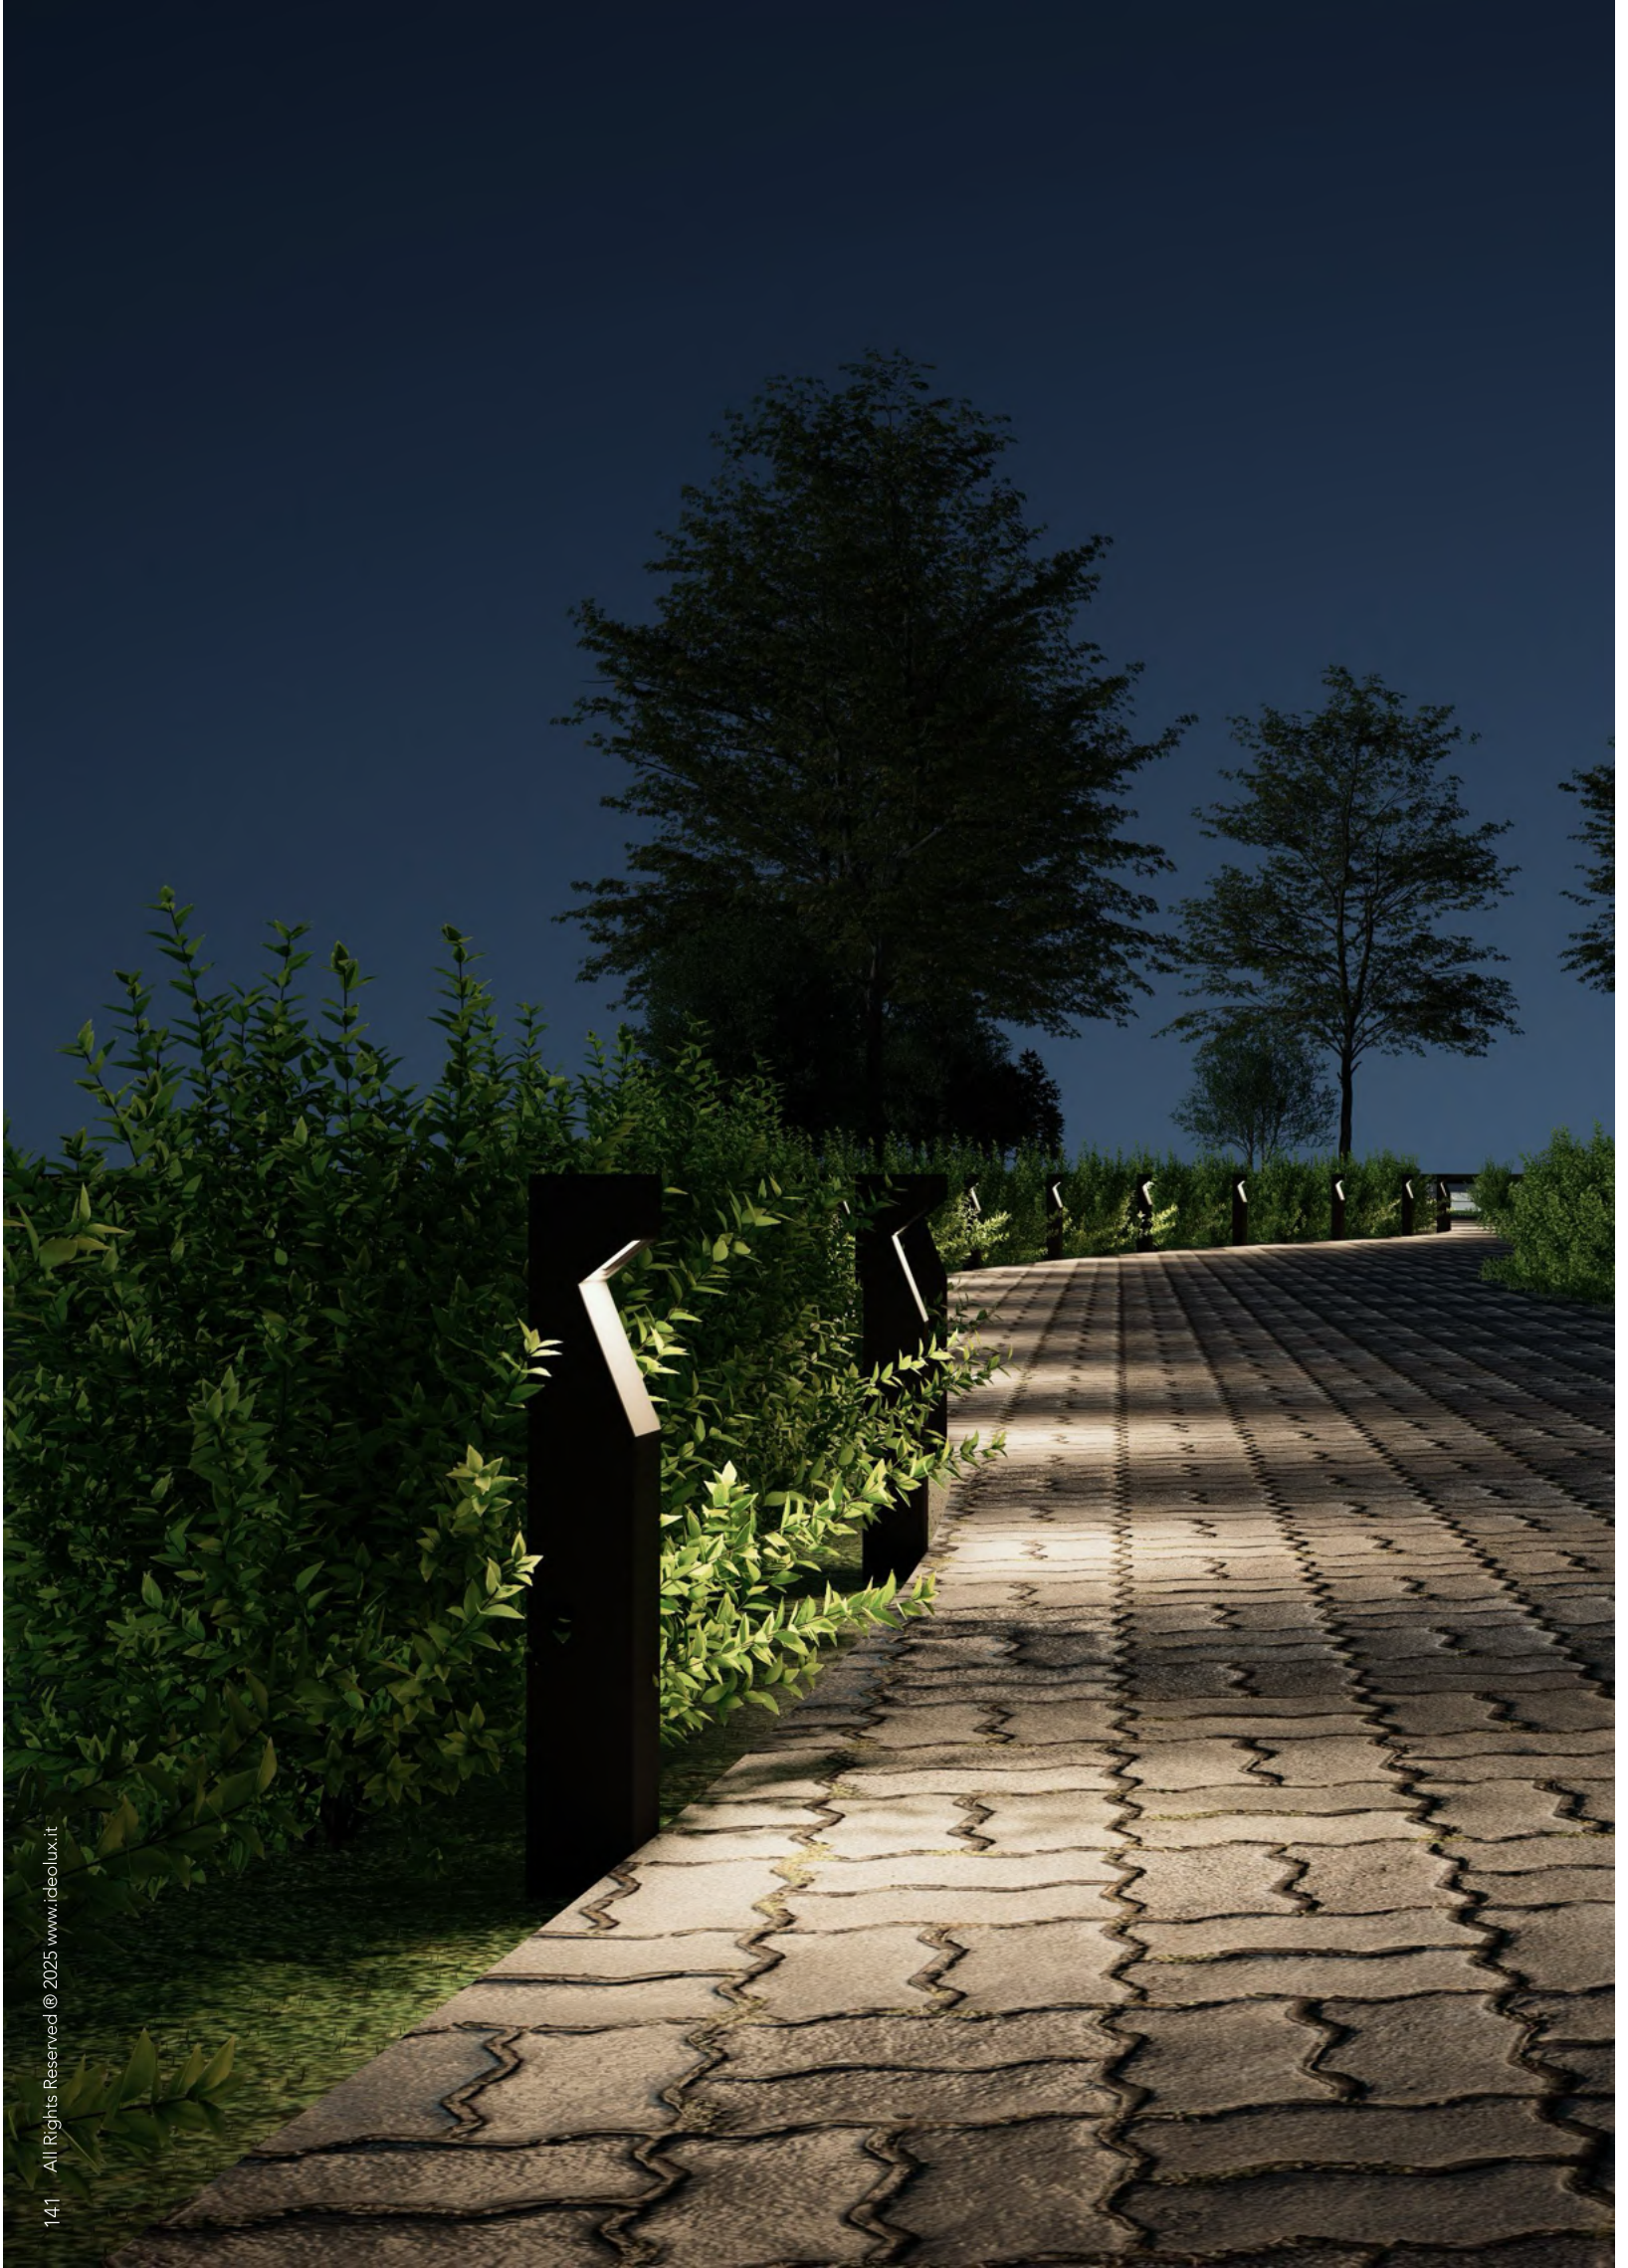


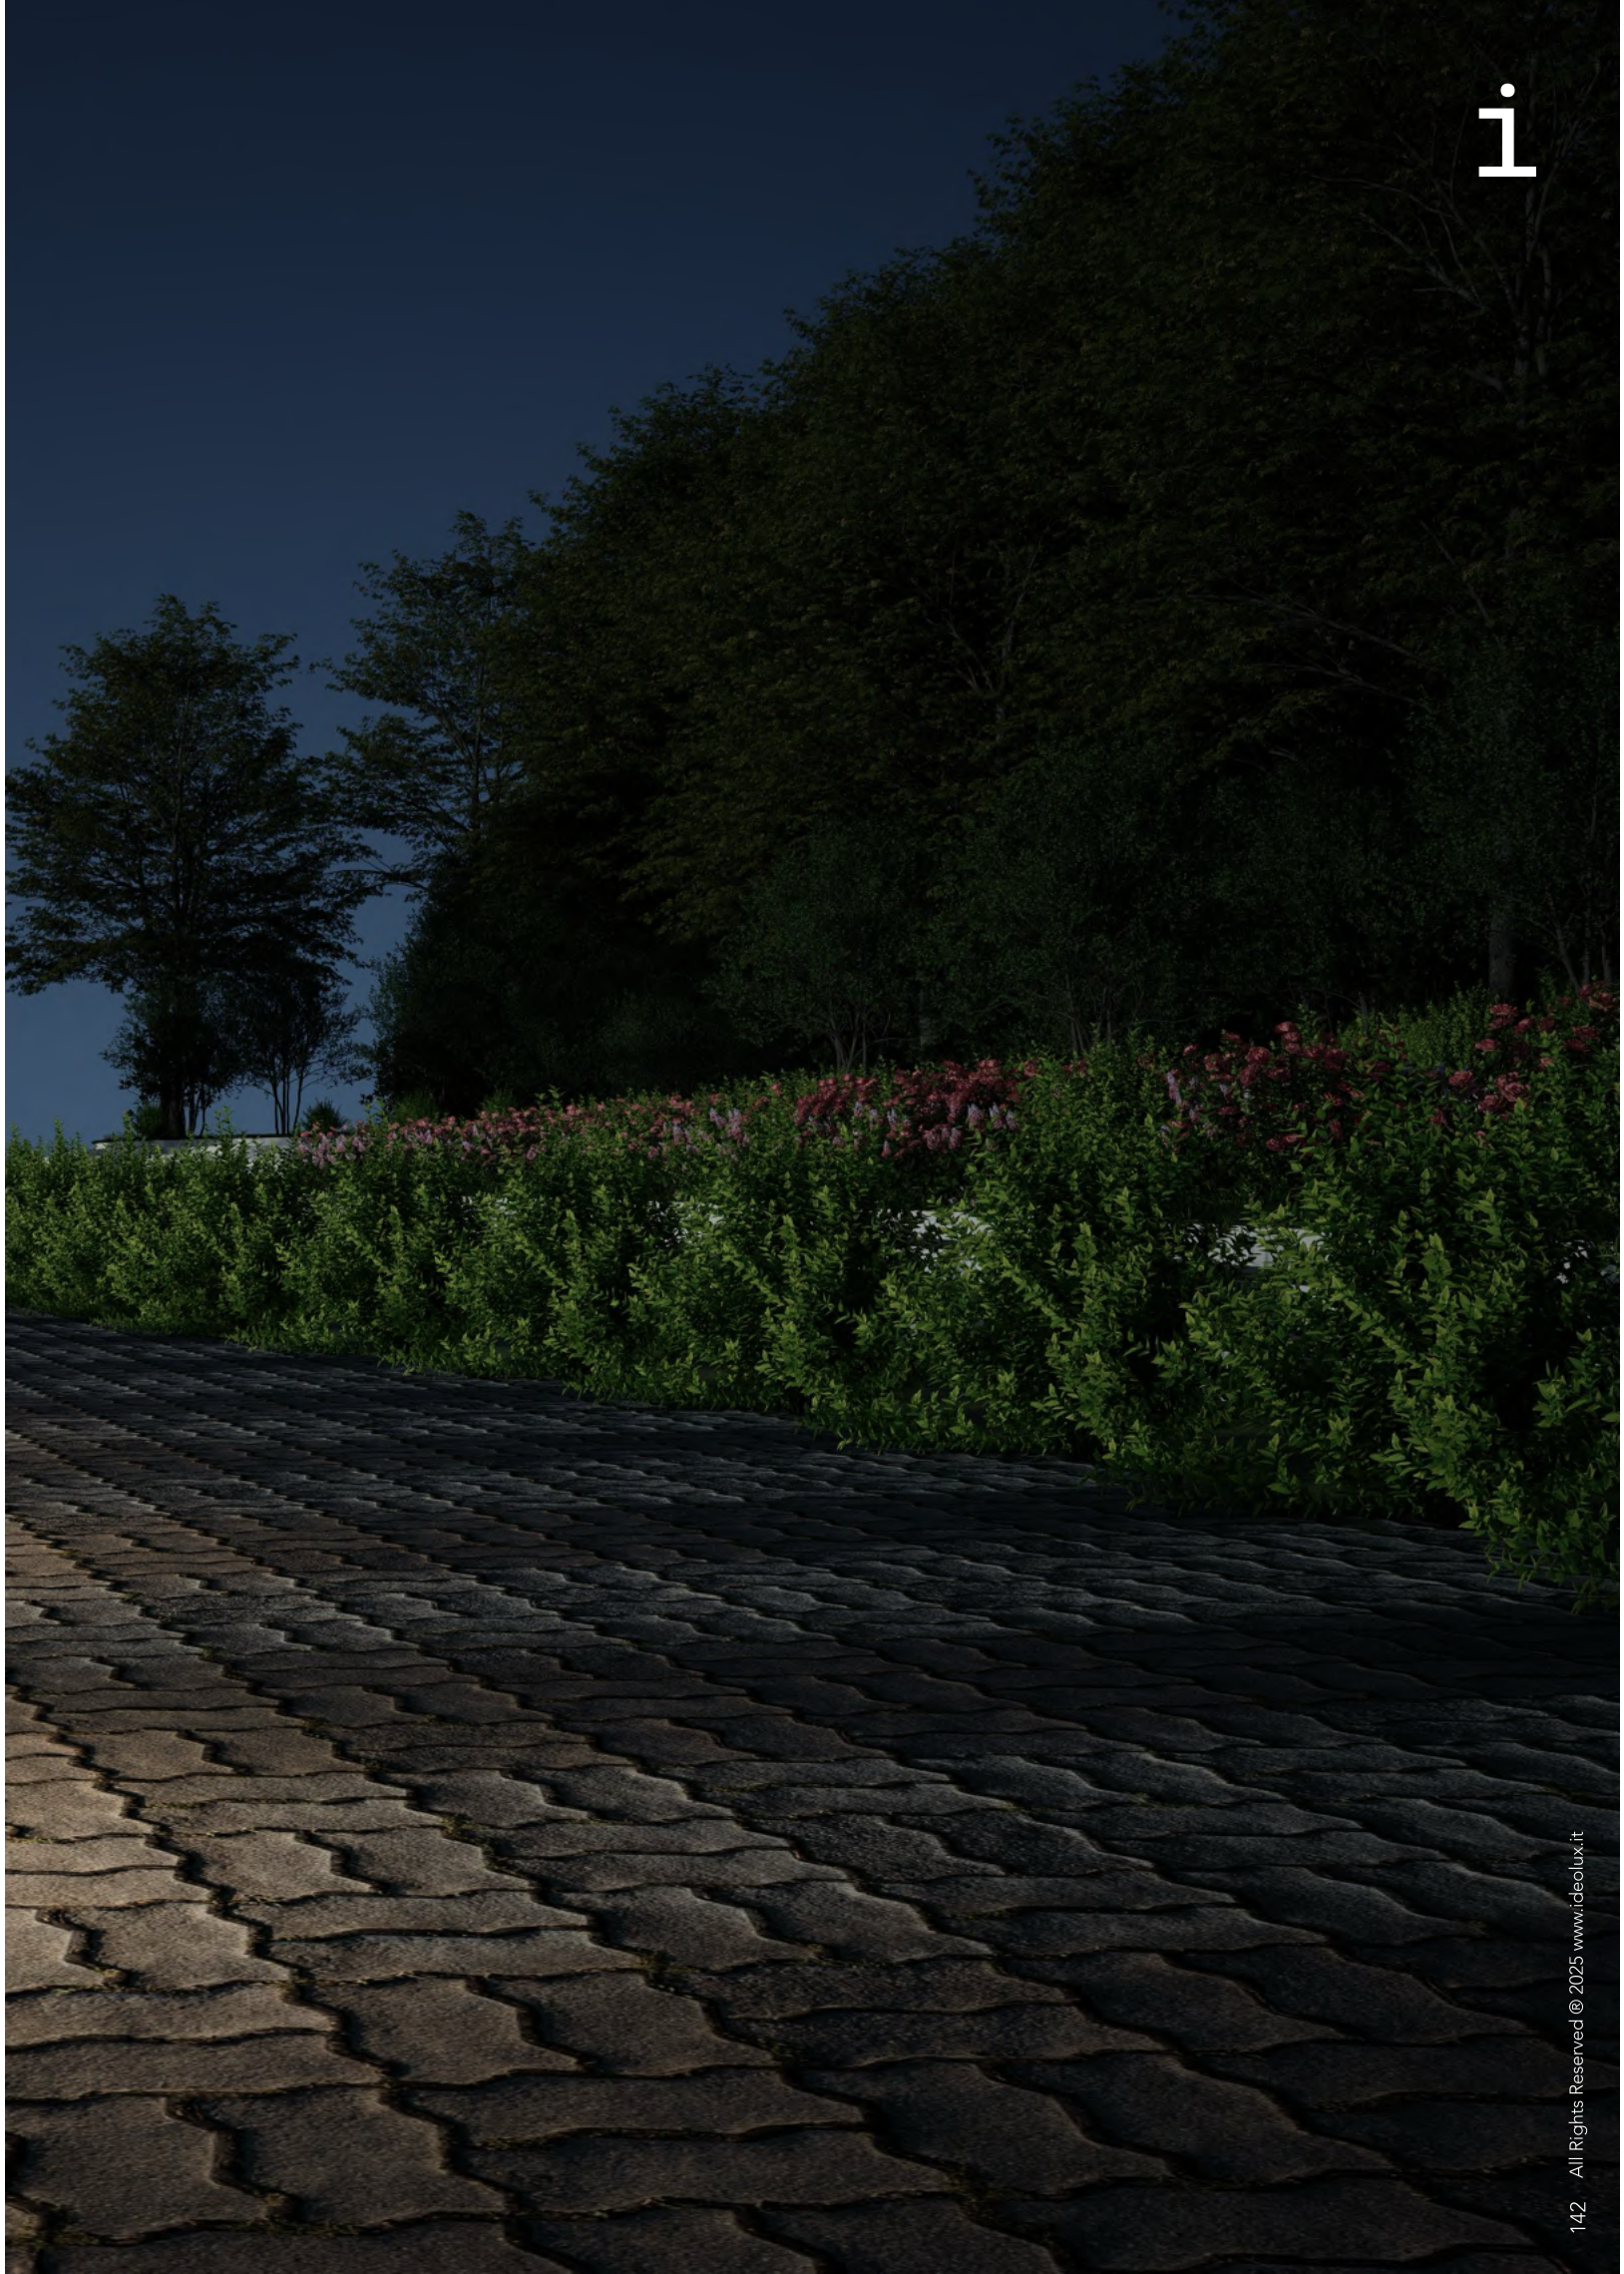

pro

round bollard

pro round bollard is a cylindrical corrosion-resistant LED bollard designed with anti-glare cone. It features two different designs with various lengths making it ideal for garden, pathway, park, or landscape lighting

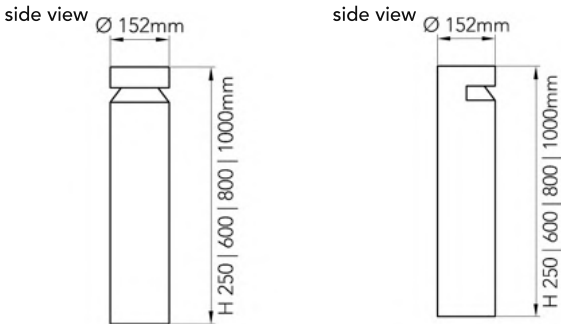

General Luminaire Data

Body Color	matt black matt white grey bronze anthracite grey
Diffuser Color	transparent
Body Material	Aluminum
Diffuser Material	Glass
Ingress Protection	66
Lifetime	50,000hrs

Electrical Characteristics

Voltage	220-240V
Frequency	50-60Hz
Power Factor	0.9
Protection	Class II
Wattage	12 24W
Control	DIG On-Off DIM1-10V DALI

Photometry & Performance

Light Source	LED SMD
Delivered Output	1200 2400lm
Luminaire Efficacy	100lm/W
CRI	80
CCT	2700K 3000K 4000K 5000K
Beam Angle	180° 360°

Accessories

Included	Control Gear
Sold Separately	Concrete Anchor



Certifications & Standards

CE
RoHS
LM80
IEC61347

pro bollard anchor

pro bollard anchor is a concrete anchor accessory used for to fixed bollard items

L 200mm PBSSM20SNNONOTNONONOT

Body Color  Stainless Steel
Body Material Steel

Product Code



*Parameters not **interselectable**. Each dimension to be matched with corresponding output

P	R	B	FM	DM	B	T	66	OUT*	CT	BM*	CON
Family	Sub	Product	Mounting	Dimension	Body	Diffuser	IP	Output	CCT	Beam	Control
				25 250mm	B Black Matt			120 1200lm	27 2700K	18 180deg	DIG On-Off
				60 600mm	W White Matt			240 2400lm	30 3000K	36 360deg	DIM 1-10V
				80 800mm	G Grey				40 4000K		DAL DALI
				10 1000mm	B Bronze				50 5000K		
					A Anthracite						
					Grey						

pro

cut bollard

pro cut bollard is a rectangular corrosion-resistant LED bollard. It is featured with clear diffuser to guarantee uniform light distribution making it ideal for garden, pathway, park, or landscape lighting

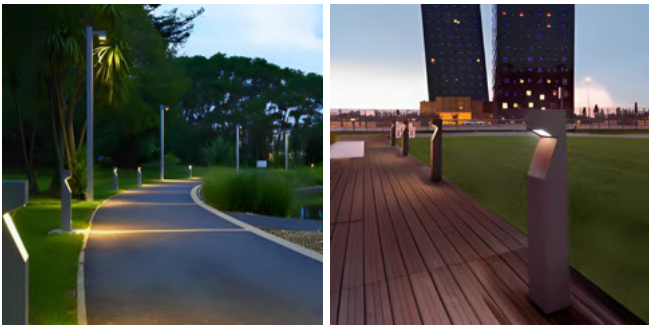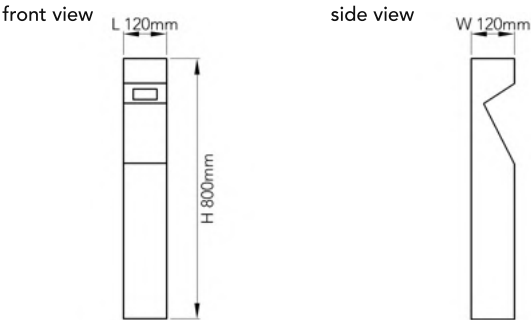

General Luminaire Data

Body Color	matt black matt white grey bronze anthracite grey
Diffuser Color	transparent
Body Material	Aluminum
Diffuser Material	Polycarbonate
Ingress Protection	66
Lifetime	50,000hrs

Photometry & Performance

Light Source	LED SMD
Delivered Output	900 1350 1800lm
Luminaire Efficacy	90lm/W
CRI	80
CCT	2700K 3000K 4000K 5000K
Beam Angle	Wide Beam

Electrical Characteristics

Voltage	220-240V
Frequency	50-60Hz
Power Factor	0.9
Protection	Class II
Wattage	10 15 20W
Control	DIG On-Off DIM 1-10V DALI

Accessories

Included	Control Gear
Sold Separately	Concrete Anchor



Certifications & Standards

CE
RoHS
LM80
IEC61347

pro bollard anchor

pro bollard anchor is a concrete anchor accessory used for to fixed bollard items

L 200mm PBSSM20SNNONOTNONONOT

Body Color  Stainless Steel
Body Material Steel



Product Code

P	C	B	FM	12	B	T	66	OUT	CT	WB	CON
Family	Sub	Product	Mounting	Dimension	Body	Diffuser	IP	Output	CCT	Beam	Control
					B Black Matt			900 900lm	27 2700K		DIG On-Off
					W White Matt			135 1350lm	30 3000K		DIM 1-10V
					G Grey			180 1800lm	40 4000K		DAL DALI
					B Bronze				50 5000K		
					A Anthracite						
					Grey						

pro

wedge bollard

pro wedge bollard is a cylindrical corrosion-resistant LED bollard designed with anti-glare cone. It features two different designs with various lengths making it ideal for garden, pathway, park, or landscape lighting

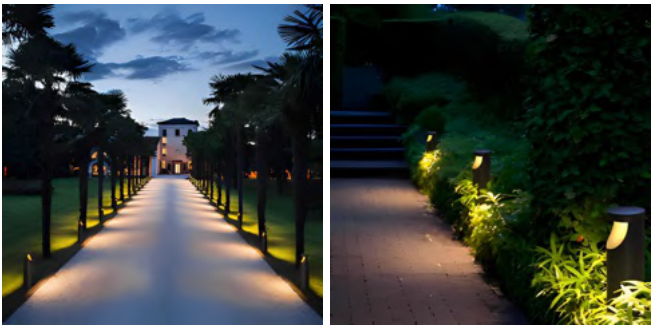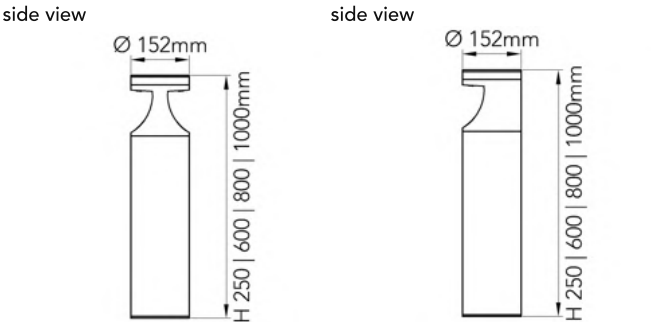

General Luminaire Data

Body Color	matt black matt white grey bronze anthracite grey
Diffuser Color	transparent
Body Material	Aluminum
Diffuser Material	Glass
Ingress Protection	66
Lifetime	50,000hrs

Photometry & Performance

Light Source	LED SMD
Delivered Output	1200 1500 2400lm
Luminaire Efficacy	100lm/W
CRI	80
CCT	2700K 3000K 4000K 5000K
Beam Angle	180° 360°

Electrical Characteristics

Voltage	220-240V
Frequency	50-60Hz
Power Factor	0.9
Protection	Class II
Wattage	12 15 24W
Control	DIG On-Off DIM 1-10V DALI

Accessories

Included	Control Gear
Sold Separately	Concrete Anchor



Certifications & Standards

CE
RoHS
LM80
IEC61347

pro bollard anchor

pro bollard anchor is a concrete anchor accessory used for to fixed bollard items

L 200mm PBSSM20SNNONOTNONONOT

Body Color  Stainless Steel
Body Material Steel

Product Code


*Parameters not **interselectable**. Each dimension to be matched with corresponding output

P	W	B	FM	DM	B	T	66	OUT*	CT	BM*	CON
Family	Sub	Product	Mounting	Dimension	Body	Diffuser	IP	Output	CCT	Beam	Control
				25 250mm	B Black Matt			120 1200lm	27 2700K	18 180deg	DIG On-Off
				60 600mm	W White Matt			150 1500lm	30 3000K	18 180deg	DIM 1-10V
				80 800mm	G Grey			240 2400lm	40 4000K	36 360deg	DAL DALI
				10 1000mm	B Bronze				50 5000K		
					A Anthracite						
					Grey						

pro

rectangular bollard

pro rectangular bollard is an anti-glare bollard that is ideal for illuminating walkways, pathways, and internal streets. It features a die-cast aluminum body with a clear diffuser, ensuring uniform light distribution

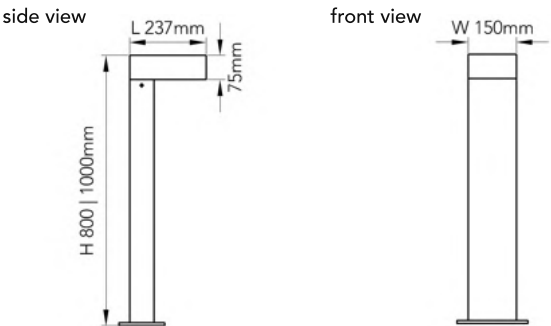

General Luminaire Data

Body Color	matt black matt white grey dark grey aluminum
Diffuser Color	transparent
Body Material	Aluminum
Diffuser Material	Glass
Ingress Protection	66
Lifetime	50,000hrs


Electrical Characteristics

Voltage	120-270V
Frequency	50-60Hz
Power Factor	0.9
Protection	Class II
Wattage	12W
Control	DIG On-Off DIM 1-10V DALI

Photometry & Performance

Light Source	LED SMD
Delivered Output	1200lm
Luminaire Efficacy	100lm/W
CRI	80
CCT	2700K 3000K 4000K 5700K

Beam Angle



Medium
Asymmetric Beam

Accessories

Included	Control Gear
Sold Separately	Anchor Bolts



Certifications & Standards

CE
RoHS
LM80
IEC61347

pro bollard anchor


pro bollard anchor is a concrete anchor accessory used for to fixed bollard items

H 250mm PBASM25SNNONOTNONONOT

Body Color  Stainless Steel
Body Material Iron

Product Code

P	R	B	FM	DM	B	T	66	120	CT	MA	CON
Family	Sub	Product	Mounting	Dimension	Body	Diffuser	IP	Output	CCT	Beam	Control
				80 800mm	B Black Matt				27 2700K		DIG On-Off
				10 1000mm	W White Matt				30 3000K		DIM 1-10V
					G Grey				40 4000K		DAL DALI
					D Dark Grey				57 5700K		
					A Aluminum						


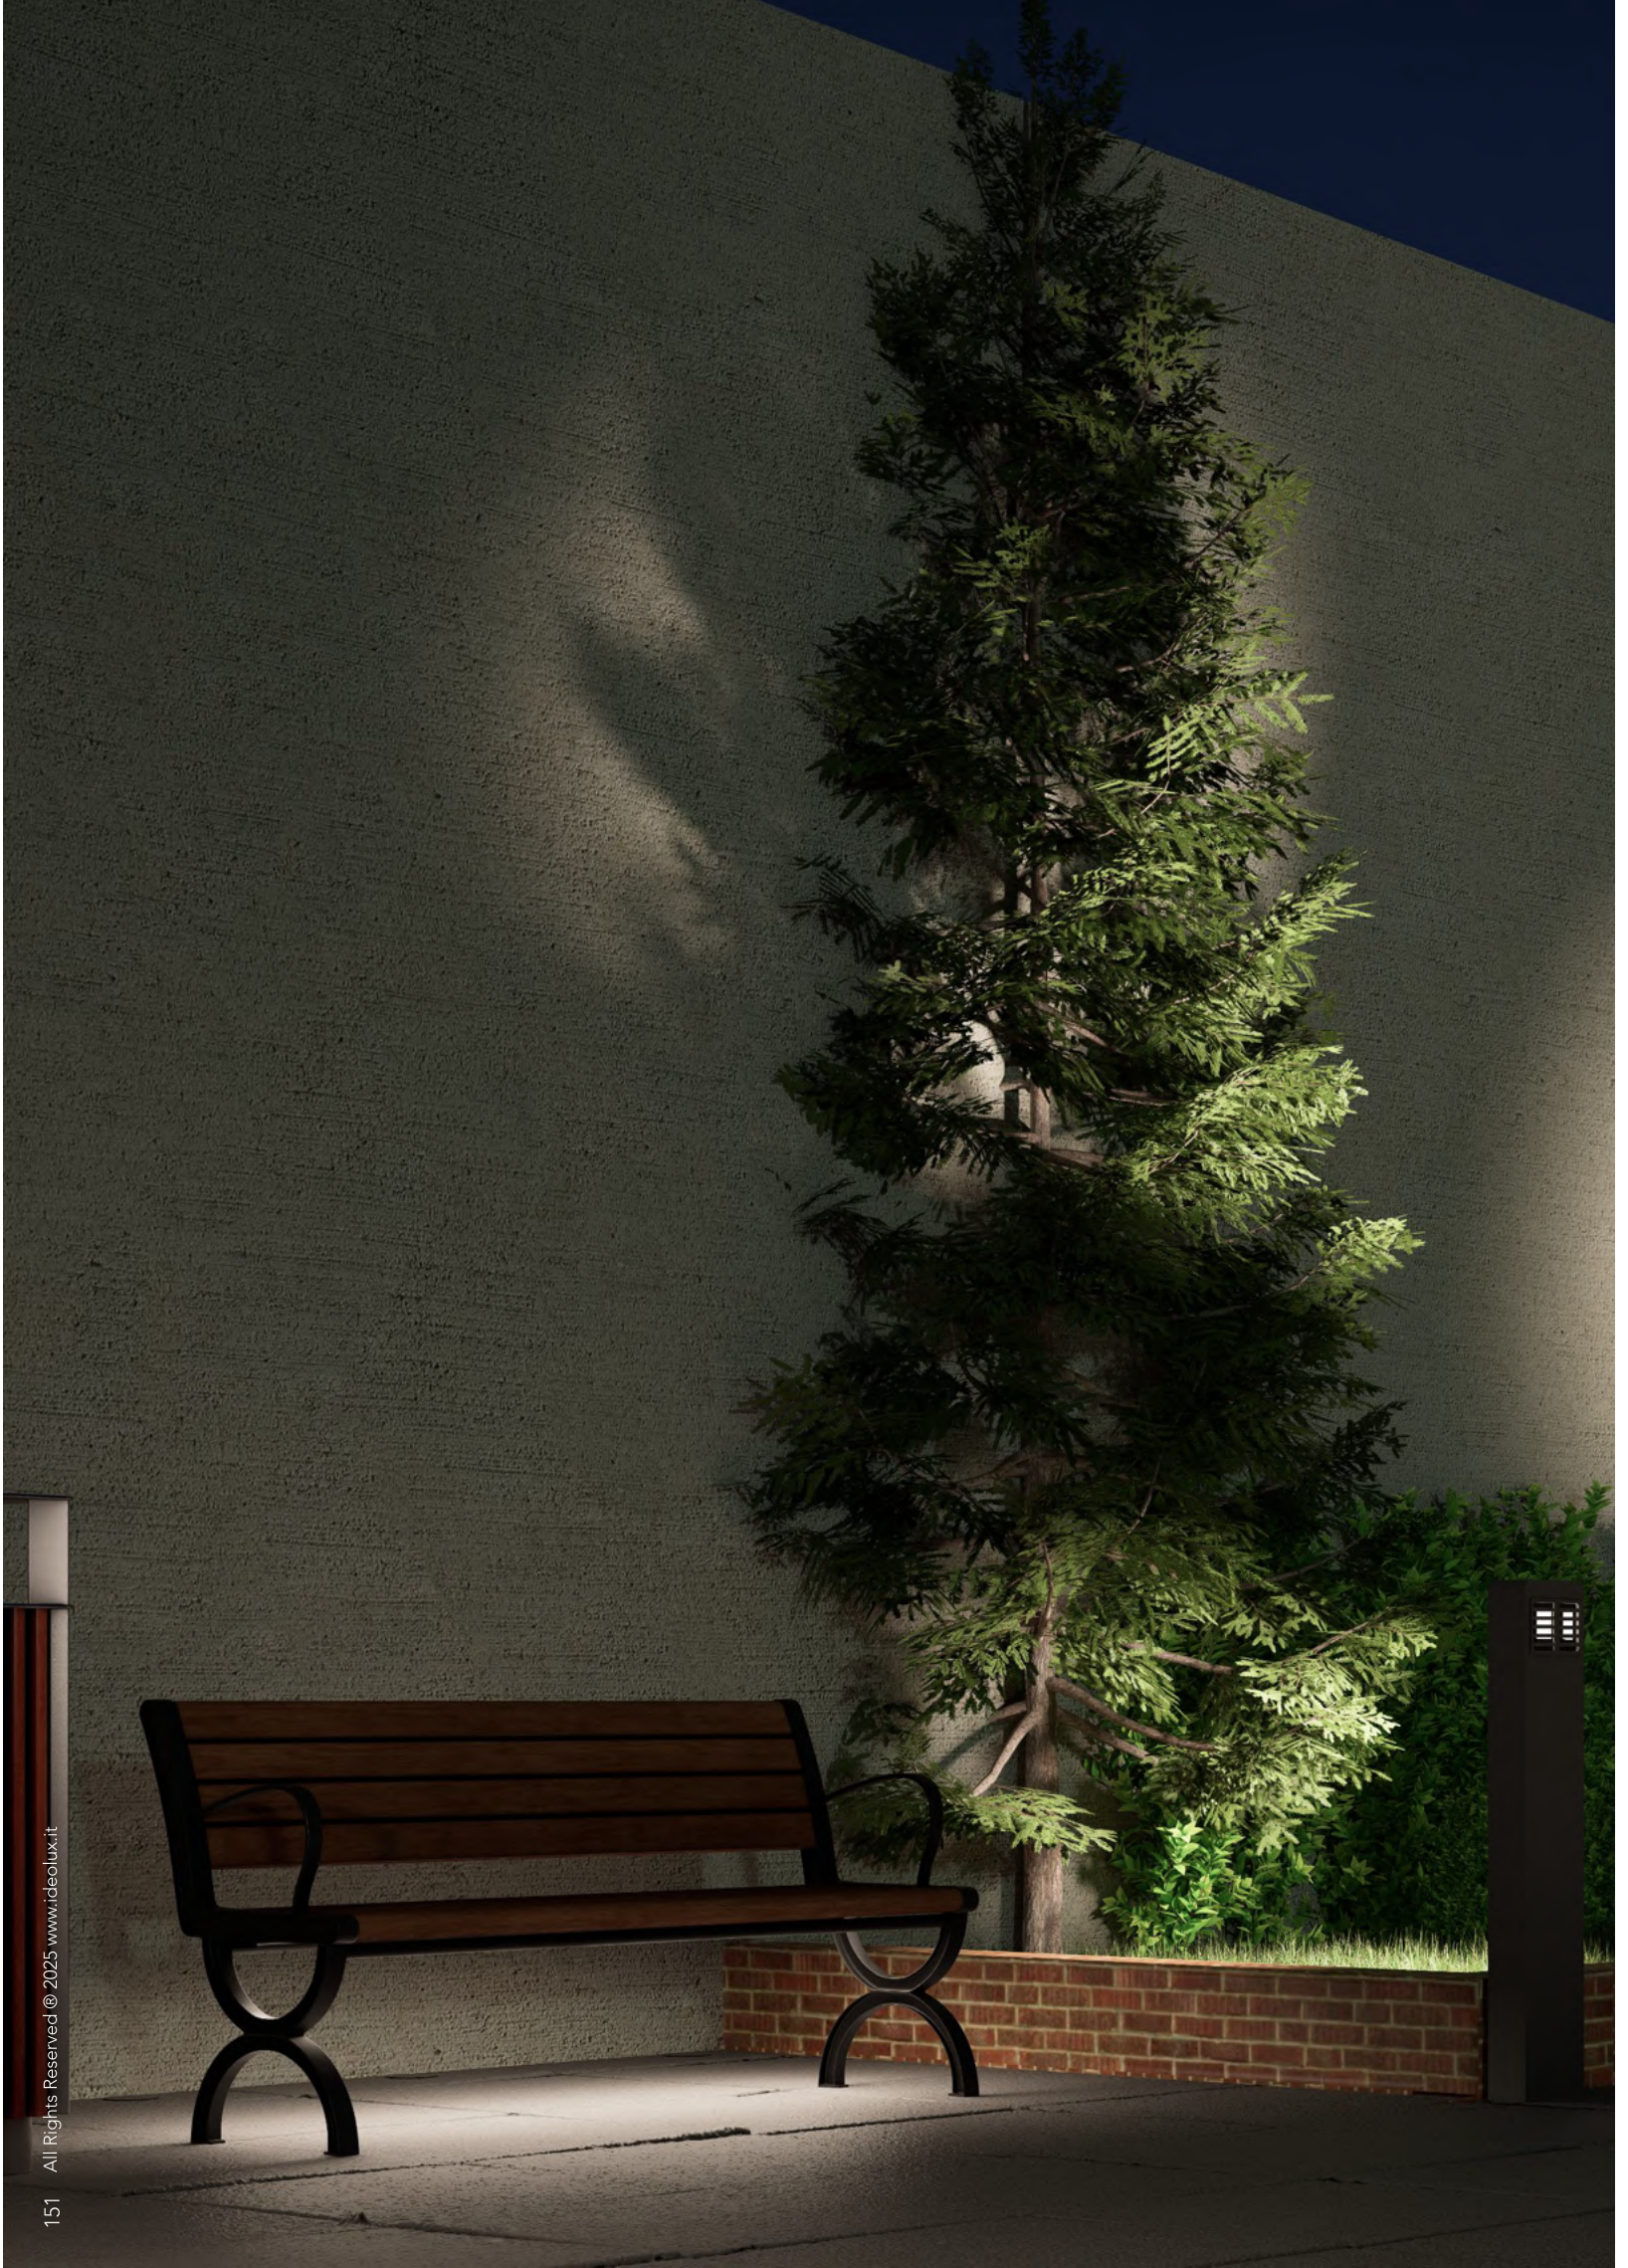




pro

slim bollard

pro slim bollard is a premium outdoor lighting fixture that combines elegance with versatility. Its sophisticated, high-end design features adjustable and tiltable heads, available in single or double configurations, allowing for customized illumination to suit desired setting

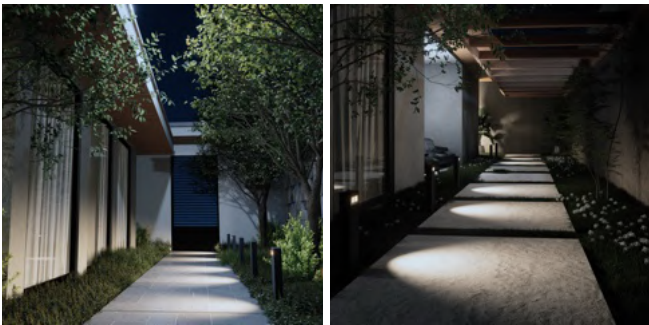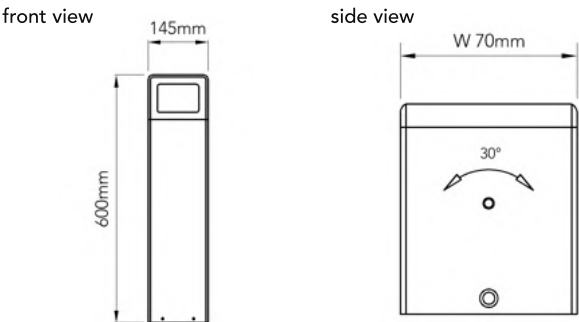

General Luminaire Data

*available upon request

Body Color


matt black


matt white


grey


any other RAL colors *

Diffuser Color


transparent

Body Material Aluminum
Diffuser Material Tempered Glass
Ingress Protection 65
Lifetime 50,000hrs

Electrical Characteristics

Voltage 24V
Wattage 12 | 16W
Control Not Included

Photometry & Performance


Light Source LED SMD
Delivered Output 768 | 1024lm
Luminaire Efficacy 64lm/W
CRI 80
CCT


2700K


3000K



4000K


5700K

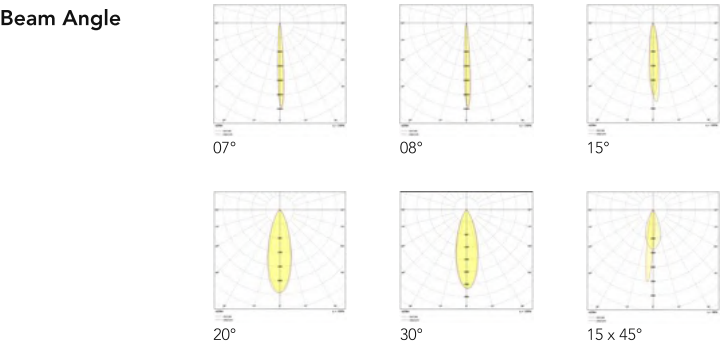

Accessories

Included	Inner Plate
Sold Separately	Control Gear
	Integral Louvre
	Mounting Plate

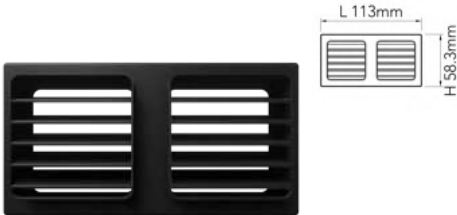

Certifications & Standards

CE
RoHS
LM80
IEC61347

pro slim louvre

pro slim louvre is an anti glare shield accessory used for pro slim bollard

L 113mm PSLSM11BNNONOTNONONOT

Body Color ■ Black
Body Material Plastic


Product Code

P	S	B	FM	14	B	T	65	OUT	CT	BM	NOT
Family	Sub	Product	Mounting	Dimension	Body	Diffuser	IP	Output	CCT	Beam	Control
					B Black Matt			768 768lm	27 2700K	07 07deg	
					W White Matt			102 1024lm	30 3000K	08 08deg	
					G Grey				40 4000K	15 15deg	
									57 5700K	20 20deg	
										30 30deg	
										15 15x45	

pro

slim bollard


pro slim bollard is a premium outdoor lighting fixture that combines elegance with versatility. Its sophisticated, high-end design features adjustable and tiltable heads, available in single or double configurations, allowing for customized illumination to suit desired setting

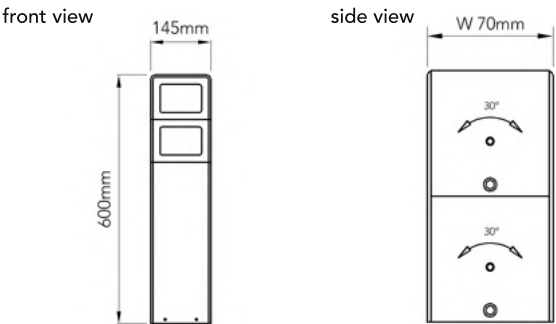

General Luminaire Data

*available upon request

Body Color



Diffuser Color



Body Material	Aluminum
Diffuser Material	Tempered Glass
Ingress Protection	65
Lifetime	50,000hrs


Electrical Characteristics

Voltage	24V
Wattage	24W
Control	Not Included

Photometry & Performance


Light Source	LED SMD
Delivered Output	2240lm
Luminaire Efficacy	64lm/W
CRI	80
CCT	2700K 3000K 4000K 5700K

Beam Angle

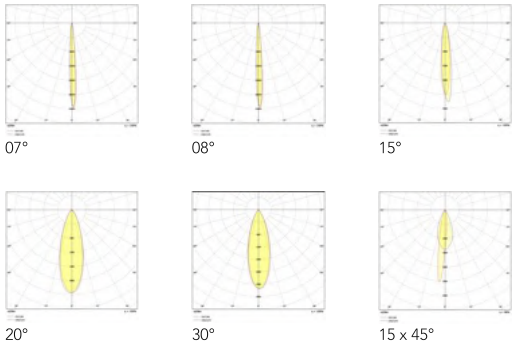

Accessories

Included	Inner Plate
Sold Separately	Control Gear
	Integral Louvre
	Mounting Plate

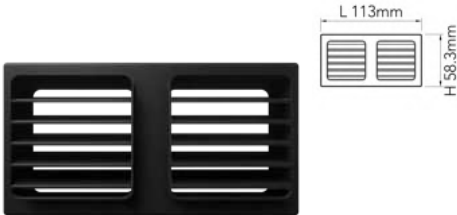

Certifications & Standards

CE
RoHS
LM80
IEC61347

pro slim louvre

pro slim louvre is an anti glare shield accessory used for pro slim bollard

L 113mm PSLSM11BNNONOTNONONOT

Body Color Black
Body Material Plastic


Product Code

P	S	B	FM	60	B	T	65	224	CT	BM	NOT
Family	Sub	Product	Mounting	Dimension	Body	Diffuser	IP	Output	CCT	Beam	Control
					B Black Matt				27 2700K	07 07deg	
					W White Matt				30 3000K	08 08deg	
					G Grey				40 4000K	15 15deg	
									57 5700K	20 20deg	
										30 30deg	
										15 15x45	

pro

square bollard

pro square bollard is a lighting fixture designed with a transparent diffuser that ensures optimal viewing comfort. It is an ideal choice for gardens, pathways, or landscape lighting

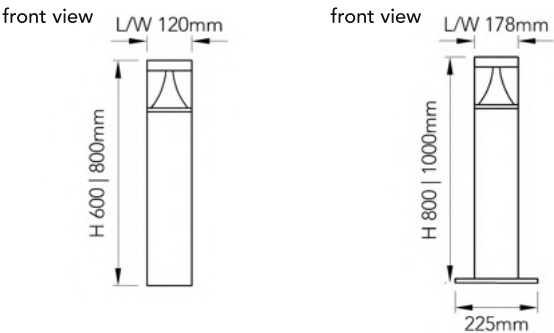

General Luminaire Data

Body Color	matt black matt white grey dark grey
Diffuser Color	transparent
Body Material	Aluminum
Diffuser Material	Polycarbonate
Ingress Protection	66
Lifetime	50,000hrs

Photometry & Performance

Light Source	LED SMD
Delivered Output	1500 2500lm
Luminaire Efficacy	100lm/W
CRI	75
CCT	2700K 3000K 4000K 5700K
Beam Angle	Wide Beam

Electrical Characteristics

Voltage	120-270V
Frequency	50-60Hz
Power Factor	0.9
Protection	Class II
Wattage	15 25W
Control	DIG On-Off DIM 0-10V DALI


Accessories		Certifications & Standards
Included	Control Gear Square Base Flange Expansion Screws	CE RoHS LM80 IEC61347

Product Code					*Parameters not interselectable . Each dimension to be matched with corresponding output						
P	S	B	FM	DM*	B	T	66	OUT*	CT	WB	CON
Family	Sub	Product	Mounting	Dimension	Body	Diffuser	IP	Output	CCT	Beam	Control
				60 600mm	B Black Matt			150 1500lm	27 2700K		DIG On-Off
				80 800mm	W White Matt			150 1500lm	30 3000K		DIM 0-10V
				80 800mm	G Grey			300 3000lm	40 4000K		DAL DALI
				10 1000mm	D Dark Grey			300 3000lm	57 5700K		

pro

shroom bollard


pro shroom bollard is a mushroom-shaped bollard that features a durable, lightweight die-cast body and an IP66 rating for excellent weather resistance. Easy to install and built for long-lasting performance, it's ideal for enhancing pathways and outdoor spaces with reliable, stylish illumination



General Luminaire Data

*available upon request

Body Color



Diffuser Color



Body Material	Aluminum
Diffuser Material	Tempered Glass
Ingress Protection	66
Lifetime	50,000hrs


Electrical Characteristics

Voltage	200-240V
Frequency	50-60Hz
Power Factor	0.9
Protection	Class II
Wattage	6 12 18W
Control	DIG On-Off

Photometry & Performance

Light Source	LED SMD
Delivered Output	300 600 900lm
Luminaire Efficacy	50lm/W
CRI	80
CCT	2700K 3000K 4000K 5700K

Beam Angle




Accessories			Certifications & Standards		
Included	Control Gear Mounting Base		CE RoHS LM80 IEC61347		

Product Code											
P	S	B	FM	15	B	T	66	OUT	CT	90	DIG
Family	Sub	Product	Mounting	Dimension	Body	Diffuser	IP	Output	CCT	Beam	Control
					R RAL 9011			300 300lm	27 2700K		
					Sandy			600 600lm	30 3000K		
					G Grey			900 900lm	40 4000K		
									57 5700K		

pro

shroom bollard


pro shroom bollard is a mushroom-shaped bollard that features a durable, lightweight die-cast body and an IP66 rating for excellent weather resistance. Easy to install and built for long-lasting performance, it's ideal for enhancing pathways and outdoor spaces with reliable, stylish illumination



General Luminaire Data

*available upon request

Body Color



Diffuser Color



Body Material	Aluminum
Diffuser Material	Tempered Glass
Ingress Protection	66
Lifetime	50,000hrs


Electrical Characteristics

Voltage	200-240V
Frequency	50-60Hz
Power Factor	0.9
Protection	Class II
Wattage	6 12 18W
Control	DIG On-Off

Photometry & Performance

Light Source	LED SMD
Delivered Output	300 600 900lm
Luminaire Efficacy	50lm/W
CRI	80
CCT	2700K 3000K 4000K 5700K

Beam Angle




Accessories		Certifications & Standards
Included	Control Gear Stake	CE RoHS LM80 IEC61347

Product Code											
P	S	B	IR	15	B	T	66	OUT	CT	90	DIG
Family	Sub	Product	Mounting	Dimension	Body	Diffuser	IP	Output	CCT	Beam	Control
					R RAL 9011			300 300lm	27 2700K		
					Sandy			600 600lm	30 3000K		
					G Grey			900 900lm	40 4000K		
									57 5700K		

pro

frame bollard

pro frame bollard is ideal for illuminating lawns, walkways, and pathways. Built with a corrosion-resistant die-cast aluminum body and a clear diffuser, it ensures durable performance and uniform light distribution in any outdoor setting

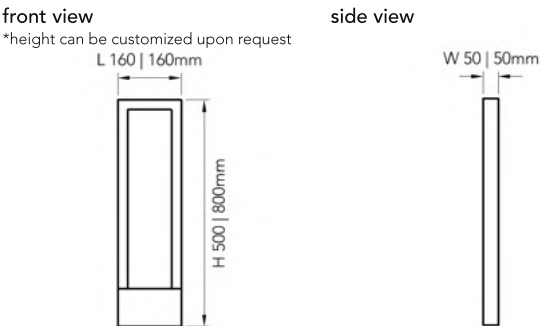

General Luminaire Data


Body Color	black sandy matt white sandy matt grey
Diffuser Color	transparent
Body Material	Aluminum
Diffuser Material	Tempered Glass
Ingress Protection	65
Lifetime	50,000hrs

Electrical Characteristics

Voltage	220-240V
Frequency	50-60Hz
Power Factor	0.9
Protection	Class II
Wattage	11W
Control	DIG On-Off TRIAC DIM 0-10V DALI

Photometry & Performance

*available upon request	
Light Source	LED COB
Delivered Output	451lm
Luminaire Efficacy	41lm/W
CRI	80
CCT	2700K 3000K 3500K 4000K 5000K RGBW * TW 2700K-5000K *

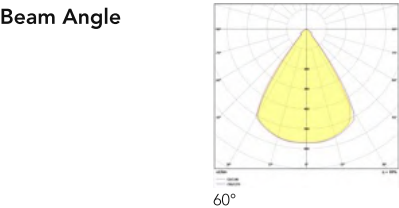

Accessories		Certifications & Standards
Included	Control Gear Anchor Bolt	CE RoHS LM80 IEC61347

Product Code											
P	F	B	FM	DM	B	T	65	451	CT	60	CON
Family	Sub	Product	Mounting	Dimension	Body	Diffuser	IP	Output	CCT	Beam	Control
				50 500mm	B Black Sandy				27 2700K		DIG On-Off
				80 800mm	Matt				30 3000K		TRI TRIAC
					W White Sandy				35 3500K		DIM 0-10V
					Matt				40 4000K		DAL DALI
					G Grey				50 5000K		






pro

cap bollard

pro cap bollard is an anti-glare bollard light designed with corrosion-resistant die-cast aluminum body with a clear diffuser to guarantee uniform light distribution ideal for lawns, walkways, and pathways illumination



General Luminaire Data

Body Color	matt black grey bronze anthracite grey
Diffuser Color	transparent
Body Material	Aluminum
Diffuser Material	Glass
Ingress Protection	66
Lifetime	50,000hrs


Electrical Characteristics

Voltage	220-240V
Frequency	50-60Hz
Power Factor	0.9
Protection	Class II
Wattage	10 15W
Control	DIG On-Off

Photometry & Performance

Light Source	LED SMD
Delivered Output	1000 1500lm
Luminaire Efficacy	100lm/W
CRI	80
CCT	2700K 3000K 4000K

Beam Angle




Accessories		Certifications & Standards
Included	Control Gear Mounting Base	CE RoHS LM80 IEC61347

Product Code										
P	C	B	FM	DM	B	T	66	OUT	CT	36 DIG
Family	Sub	Product	Mounting	Dimension	Body	Diffuser	IP	Output	CCT	Beam Control
				60 600mm	B Black Matt			100 1000lm	27 2700K	
				80 800mm	G Grey			150 1500lm	30 3000K	
				10 1000mm	B Bronze				40 4000K	
					A Anthracite					
					Grey					

pro

cap spike

pro cap spike is an anti-glare spike light designed with corrosion-resistant die-cast aluminum body with a clear diffuser to guarantee uniform light distribution ideal for lawns, walkways, and pathways illumination



General Luminaire Data

Body Color	matt black grey bronze anthracite grey
Diffuser Color	transparent
Body Material	Aluminum
Diffuser Material	Glass
Ingress Protection	66
Lifetime	50,000hrs

Photometry & Performance

Light Source	LED SMD
Delivered Output	1000 1500lm
Luminaire Efficacy	100lm/W
CRI	80
CCT	2700K 3000K 4000K
Beam Angle	360°

Electrical Characteristics

Voltage	220-240V
Frequency	50-60Hz
Power Factor	0.9
Protection	Class II
Wattage	10 15W
Control	DIG On-Off



Accessories		Certifications & Standards
Included	Control Gear Ground Stake	CE RoHS LM80 IEC61347

Product Code										
P	C	S	IR	DM	B	T	66	OUT	CT	36 DIG
Family	Sub	Product	Mounting	Dimension	Body	Diffuser	IP	Output	CCT	Beam Control
				60 600mm	B Black Matt			100 1000lm	27 2700K	
				80 800mm	G Grey			150 1500lm	30 3000K	
				10 1000mm	B Bronze				40 4000K	
					A Anthracite					
					Grey					

pro

cap table

pro cap table is an anti-glare free standing light designed with corrosion-resistant die-cast aluminum body with a clear diffuser to guarantee uniform light distribution usually used on tabletops but also ideal for lawns and walkways

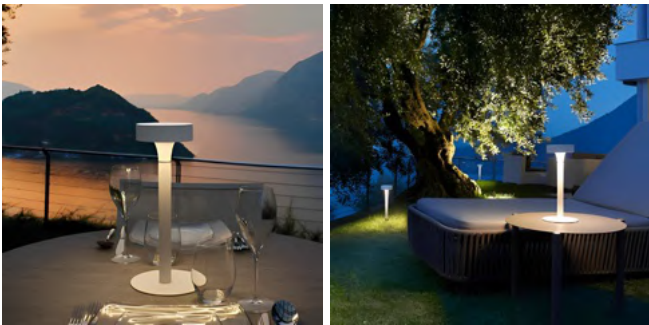

General Luminaire Data

Body Color	matt black matt white brown green
Diffuser Color	transparent
Body Material	Aluminum
Diffuser Material	Glass
Ingress Protection	66
Lifetime	50,000hrs

Photometry & Performance

Light Source	LED SMD
Delivered Output	300lm
Luminaire Efficacy	100lm/W
CRI	80
CCT	2700K 3000K 4000K
Beam Angle	360°

Electrical Characteristics

Voltage	220-240V
Frequency	50-60Hz
Power Factor	0.9
Protection	Class II
Wattage	3W
Control	DIG On-Off

Accessories		Certifications & Standards
Included	Control Gear	CE RoHS LM80 IEC61347

Product Code											
P	C	T	FS	33	B	T	66	300	CT	36	DIG
Family	Sub	Product	Mounting	Dimension	Body	Diffuser	IP	Output	CCT	Beam	Control
					B Black Matt				27 2700K		
					W White Matt				30 3000K		
					B Brown				40 4000K		
					G Green						




columns and urban décor

our meticulously crafted columns and urban décor collections is designed to elevate outdoor spaces with enduring elegance and advanced functionality

apart from their captivating design, these collections provide gentle yet sufficient illumination that enhances landscapes and pathways, fostering security, enhancing safety, and transforming public spaces into inviting, well-lit environments



durable body
material




enhanced
aesthetics



multiple CCTs



IP rating



wide range of
wattages



functional
lighting






pro

round column

pro round column is a landscape light ideal for lawns, parks, and pathways. With its sleek and minimalistic design, it seamlessly integrates into the environment, complementing the surrounding landscape without overpowering it

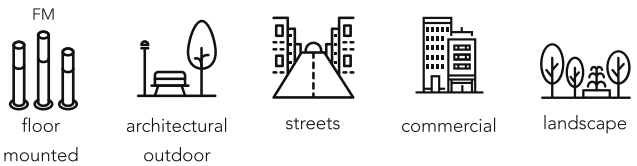


front view
*height can be customized upon request



General Luminaire Data

Body Color	matt black matt white grey dark grey aluminum
Diffuser Color	transparent
Body Material	Aluminum
Diffuser Material	Polycarbonate
Ingress Protection	66
Lifetime	50,000hrs

Photometry & Performance

Light Source	LED SMD
Delivered Output	6750lm
Luminaire Efficacy	135lm/W
CRI	80
CCT	2700K 3000K 4000K 5700K
Beam Angle	 120°

Electrical Characteristics

Voltage	120-270V
Frequency	50-60Hz
Power Factor	0.9
Protection	Class II
Wattage	50W
Control	DIG On-Off DIM 1-10V DALI


Accessories		Certifications & Standards
Included	Control Gear Anchor Bolts	CE RoHS LM80 IEC61347

Product Code											
P	R	C	FM	DM	B	T	66	675	CT	12	CON
Family	Sub	Product	Mounting	Dimension	Body	Diffuser	IP	Output	CCT	Beam	Control
				27 2700mm	B Black Matt				27 2700K		DIG On-Off
				35 3500mm	W White Matt				30 3000K		DIM 1-10V
					G Grey				40 4000K		DAL DALI
					D Dark Grey				57 5700K		
					A Aluminum						

pro

round column

pro round column is a landscape light ideal for lawns, parks, and pathways. With its sleek and minimalistic design, it seamlessly integrates into the environment, complementing the surrounding landscape without overpowering it

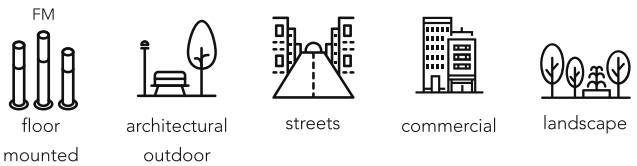

front view
*height can be customized upon request



General Luminaire Data

Body Color	matt black matt white grey dark grey aluminum
Diffuser Color	transparent
Body Material	Aluminum
Diffuser Material	Polycarbonate
Ingress Protection	66
Lifetime	50,000hrs

Photometry & Performance

Light Source	LED SMD
Delivered Output	3960 5280lm
Luminaire Efficacy	66lm/W
CRI	80
CCT	2700K 3000K 4000K 5700K
Beam Angle	120°

Electrical Characteristics

Voltage	100-240V
Frequency	50-60Hz
Power Factor	0.9
Protection	Class II
Wattage	60 80W
Control	DIG On-Off


Accessories		Certifications & Standards
Included	Control Gear Anchor Bolts	CE RoHS LM80 IEC61347

Product Code										
P	R	C	FM	DM	B	T	66	OUT	CT	12 DIG
Family	Sub	Product	Mounting	Dimension	Body	Diffuser	IP	Output	CCT	Beam Control
				27 2700mm	B Black Matt			396 3960lm	27 2700K	
				35 3500mm	W White Matt			528 5280lm	30 3000K	
					G Grey				40 4000K	
					D Dark Grey				57 5700K	
					A Aluminum					


pro

square column

pro square column is a landscape light ideal for lawns, parks, and pathways. With its sleek and minimalistic design, it seamlessly integrates into the environment, complementing the surrounding landscape without overpowering it

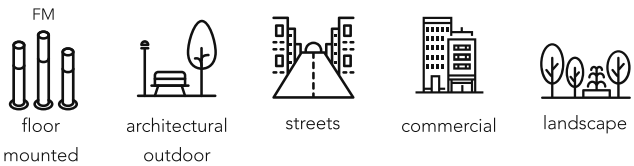

front view
*height can be customized upon request



General Luminaire Data

Body Color	matt black matt white grey dark grey aluminum
Diffuser Color	transparent
Body Material	Aluminum
Diffuser Material	Polycarbonate
Ingress Protection	66
Lifetime	50,000hrs


Electrical Characteristics

Voltage	120-270V
Frequency	50-60Hz
Power Factor	0.9
Protection	Class II
Wattage	60W
Control	DIG On-Off DIM 1-10V DALI

Photometry & Performance

Light Source	LED SMD
Delivered Output	6000lm
Luminaire Efficacy	100lm/W
CRI	80
CCT	2700K 3000K 4000K 5700K

Beam Angle



Accessories		Certifications & Standards
Included	Control Gear Anchor Bolts	CE RoHS LM80 IEC61347

Product Code											
P	S	C	FM	DM	B	T	66	600	CT	12	CON
Family	Sub	Product	Mounting	Dimension	Body	Diffuser	IP	Output	CCT	Beam	Control
				40 4000mm	B Black Matt				27 2700K		DIG On-Off
				50 5000mm	W White Matt				30 3000K		DIM 1-10V
				60 6000mm	G Grey				40 4000K		DAL DALI
					D Dark Grey				57 5700K		
					A Aluminum						







pro

rectangular top

pro rectangular top is an anti-glare top/wall light that is ideal for illuminating walkways, pathways, and internal streets. It features a die-cast aluminum body with a clear diffuser, ensuring uniform light distribution

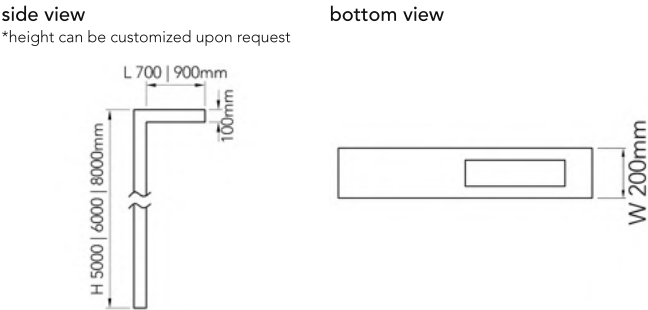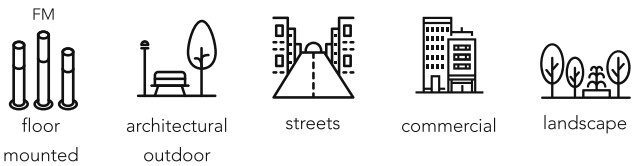

General Luminaire Data

Body Color	matt black matt white grey dark grey aluminum
Diffuser Color	transparent
Body Material	Aluminum
Diffuser Material	Glass
Ingress Protection	66
Lifetime	50,000hrs


Electrical Characteristics

Voltage	120-270V
Frequency	50-60Hz
Power Factor	0.9
Protection	Class II
Wattage	75 120W
Control	DIG On-Off DIM 1-10V DALI

Photometry & Performance


Light Source	LED SMD
Delivered Output	11250 18000lm
Luminaire Efficacy	150lm/W
CRI	80
CCT	2700K 3000K 4000K 5700K

Beam Angle

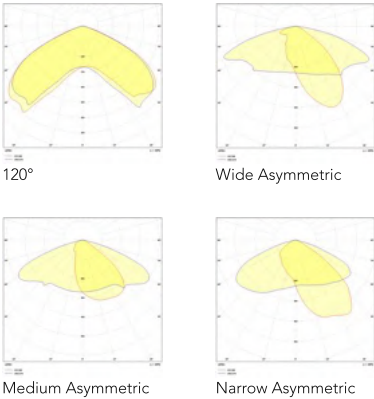

Accessories

Included	Control Gear
Sold Separately	Pole
	Pole Cover
	Round Pole Hoop

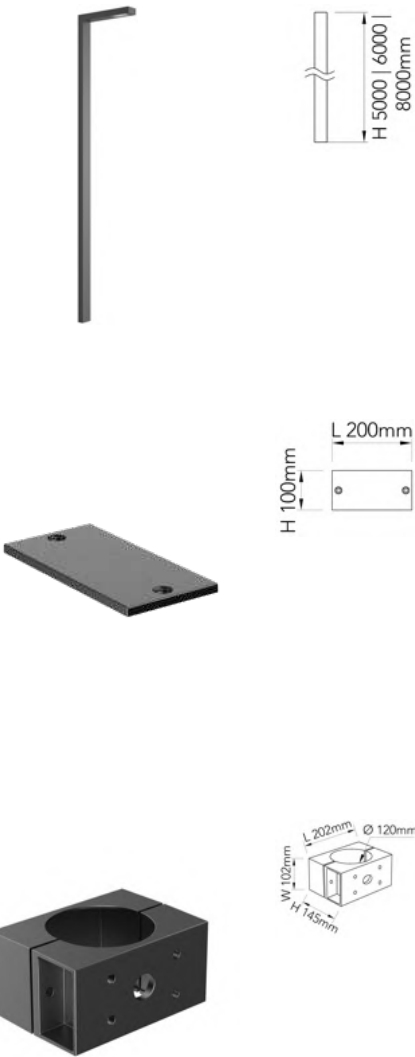

Certifications & Standards

CE
RoHS
LM80
IEC61347

pro rectangular pole

pro rectangular pole is a pole mounted accessory used for pro rectangular top

L 5000mm PRPSM50BNNONOTNONONOT
L 6000mm PRPSM60BNNONOTNONONOT
L 8000mm PRPSM80BNNONOTNONONOT

Body Color Black White Grey
 Dark Grey Aluminum

Body Material Aluminum

pro rectangular cover

pro rectangular cover is a pole cover accessory used for pro rectangular top

L 200mm PRCSM20BNNONOTNONONOT

Body Color Black White Grey
 Dark Grey Aluminum

Body Material Aluminum

pro rectangular hoop

pro rectangular hoop is a connector accessory used to connect pro rectangular top to the round pole

Ø 120mm PRHSM12BNNONOTNONONOT

Body Color Black White Grey
 Dark Grey Aluminum

Body Material Aluminum

Product Code



*Parameters not **interselectable**. Each dimension to be matched with corresponding output

P	R	T	PM	DM*	B	T	66	OUT*	CT	BM	CON
Family	Sub	Product	Mounting	Dimension	Body	Diffuser	IP	Output	CCT	Beam	Control
				70 700mm	B Black Matt			112 11250lm	27 2700K	12 120deg	DIG On-Off
				90 900mm	W White Matt			180 18000lm	30 3000K	WA Wide	DIM 1-10V
					G Grey				40 4000K	Asymmetric	DAL DALI
					D Dark Grey				57 5700K	MA Medium	
					A Aluminum					Asymmetric	
										NA Narrow	
										Asymmetric	



pro

rectangular top

pro rectangular top is an anti-glare top/wall light that is ideal for illuminating walkways, pathways, and internal streets. It features a die-cast aluminum body with a clear diffuser, ensuring uniform light distribution

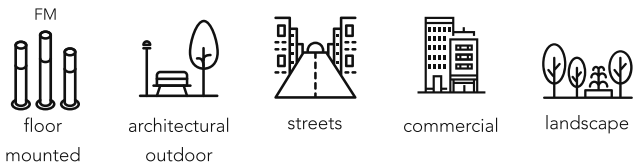

front view
*height can be customized upon request



General Luminaire Data

Body Color	matt black matt white grey dark grey aluminum
Diffuser Color	transparent
Body Material	Aluminum
Diffuser Material	Glass
Ingress Protection	66
Lifetime	50,000hrs


Electrical Characteristics

Voltage	120-270V
Frequency	50-60Hz
Power Factor	0.9
Protection	Class II
Wattage	75W 37.5← 37.5→
Control	DIG On-Off DIM 1-10V DALI

Photometry & Performance


Light Source	LED SMD
Delivered Output	11250lm
Luminaire Efficacy	150lm/W
CRI	80
CCT	2700K 3000K 4000K 5700K

Beam Angle

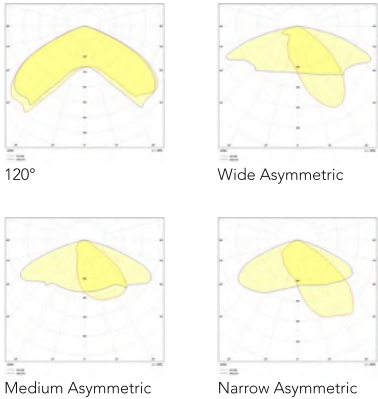

Accessories

Included	Control Gear
Sold Separately	Pole
	Pole Cover
	Round Pole Hoop

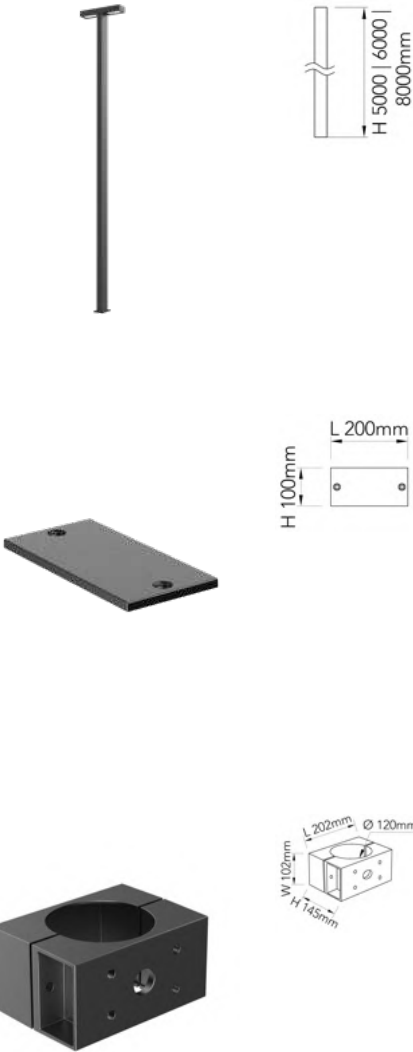

Certifications & Standards

CE
RoHS
LM80
IEC61347

pro rectangular pole

pro rectangular pole is a pole mounted accessory used for pro rectangular top

L 5000mm PRPSM50BNNONOTNONONOT
L 6000mm PRPSM60BNNONOTNONONOT
L 8000mm PRPSM80BNNONOTNONONOT

Body Color Black White Grey
 Dark Grey Aluminum

Body Material Aluminum

pro rectangular cover

pro rectangular cover is a pole cover accessory used for pro rectangular top

L 200mm PRCSM20BNNONOTNONONOT

Body Color Black White Grey
 Dark Grey Aluminum

Body Material Aluminum

pro rectangular hoop

pro rectangular hoop is a connector accessory used to connect pro rectangular top to the round pole

Ø 120mm PRHSM12BNNONOTNONONOT

Body Color Black White Grey
 Dark Grey Aluminum

Body Material Aluminum

Product Code

P R T PM 63
Family Sub Product Mounting Dimension

*Parameters not **interselectable**. Each dimension to be matched with corresponding output

B
Body
B Black Matt
W White Matt
G Grey
D Dark Grey
A Aluminum

T 66 112
Diffuser IP Output

CT
CCT
27 2700K
30 3000K
40 4000K
57 5700K



BM
Beam
12 120deg
WA Wide
Asymmetric
MA Medium
Asymmetric
NA Narrow
Asymmetric

CON
Control
DIG On-Off
DIM 1-10V
DAL DALI

pro

rectangular top

pro rectangular top is an anti-glare top/wall light that is ideal for illuminating walkways, pathways, and internal streets. It features a die-cast aluminum body with a clear diffuser, ensuring uniform light distribution

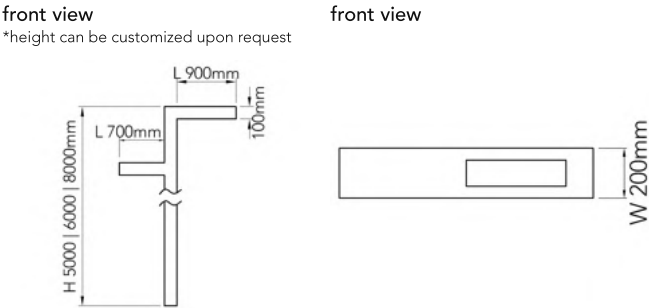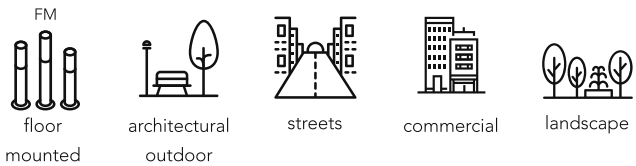

General Luminaire Data

Body Color	matt black matt white grey dark grey aluminum
Diffuser Color	transparent
Body Material	Aluminum
Diffuser Material	Glass
Ingress Protection	66
Lifetime	50,000hrs


Electrical Characteristics

Voltage	120-270V
Frequency	50-60Hz
Power Factor	0.9
Protection	Class II
Wattage	150W 75← 75→ 195W 75W← 120W→ 240W 120← 120→
Control	DIG On-Off DIM 1-10V DALI

Photometry & Performance


Light Source	LED SMD
Delivered Output	22500 29250 36000lm
Luminaire Efficacy	150lm/W
CRI	80
CCT	2700K 3000K 4000K 5700K

Beam Angle

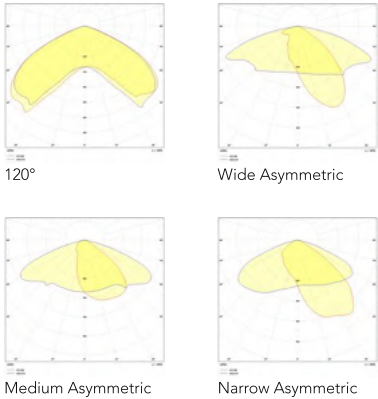

Accessories

Included	Control Gear
Sold Separately	Pole
	Pole Cover
	Round Pole Hoop

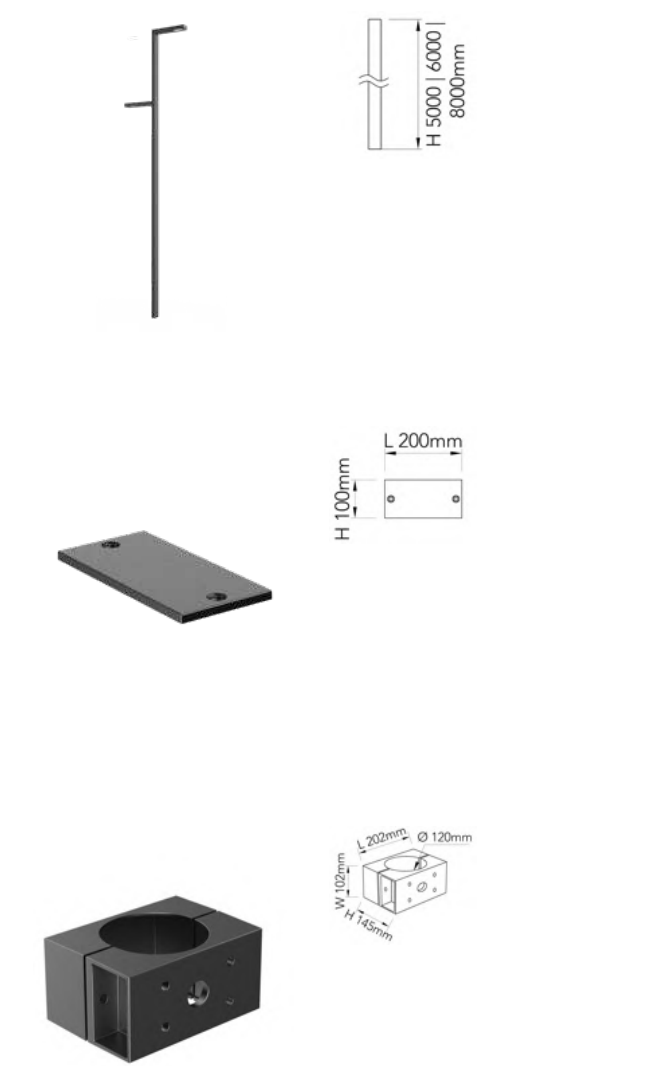

Certifications & Standards

CE
RoHS
LM80
IEC61347

pro rectangular pole

pro rectangular pole is a pole mounted accessory used for pro rectangular top

L 5000mm PRPSM50BNNONOTNONONOT
L 6000mm PRPSM60BNNONOTNONONOT
L 8000mm PRPSM80BNNONOTNONONOT

Body Color Black White Grey
 Dark Grey Aluminum

Body Material Aluminum

pro rectangular cover

pro rectangular cover is a pole cover accessory used for pro rectangular top

L 200mm PRCSM20BNNONOTNONONOT

Body Color Black White Grey
 Dark Grey Aluminum

Body Material Aluminum

pro rectangular hoop

pro rectangular hoop is a connector accessory used to connect pro rectangular top to the round pole

Ø 120mm PRHSM12BNNONOTNONONOT

Body Color Black White Grey
 Dark Grey Aluminum

Body Material Aluminum


Product Code

P	R	T	PM	DM	B	T	66	OUT	CT	BM	CON
Family	Sub	Product	Mounting	Dimension	Body	Diffuser	IP	Output	CCT	Beam	Control
				70 700mm	B Black Matt			225 22500lm	27 2700K	12 120deg	DIG On-Off
				90 900mm	W White Matt			292 29250lm	30 3000K	WA Wide	DIM 1-10V
					G Grey			360 36000lm	40 4000K	Asymmetric	DAL DALI
					D Dark Grey				57 5700K	MA Medium	
					A Aluminum					Asymmetric	
										NA Narrow	
										Asymmetric	

pro


rectangular top

pro rectangular top is an anti-glare top/wall light that is ideal for illuminating walkways, pathways, and internal streets. It features a die-cast aluminum body with a clear diffuser, ensuring uniform light distribution

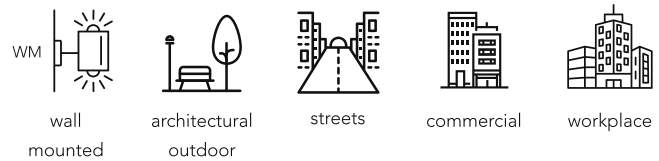

side view

bottom view

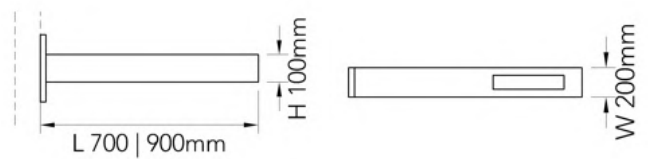


General Luminaire Data

Body Color	matt black matt white grey dark grey aluminum
Diffuser Color	transparent
Body Material	Aluminum
Diffuser Material	Glass
Ingress Protection	66
Lifetime	50,000hrs

Photometry & Performance

Light Source	LED SMD
Delivered Output	9000 11250 15000 18000 22500lm
Luminaire Efficacy	150lm/W
CRI	80
CCT	2700K 3000K 4000K 5700K

Beam Angle

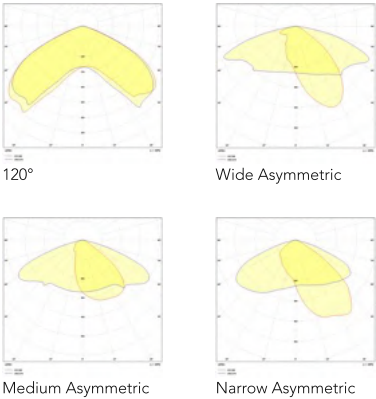

Electrical Characteristics

Voltage	120-270V
Frequency	50-60Hz
Power Factor	0.9
Protection	Class II
Wattage	60 75 100 120 150W
Control	DIG On-Off DIM 1-10V DALI

Accessories

Included	Control Gear
Sold Separately	Wall Mount Flange



Certifications & Standards

CE
RoHS
LM80
IEC61347

pro rectangular flange

pro rectangular is a wall mounted accessory used to support pro rectangular top on wall mounting applications

L 200mm PRFWM20SNNNONOTNONOT

Body Color Black
Body Material Iron

Product Code


*Parameters not **interselectable**. Each dimension to be matched with corresponding output

P	R	T	WM	DM*	B	T	66	OUT*	CT	BM	CON
Family	Sub	Product	Mounting	Dimension	Body	Diffuser	IP	Output	CCT	Beam	Control
			70 700mm	B Black Matt				900 9000lm	27 2700K	12 120deg	DIG On-Off
			70 700mm	W White Matt				112 11250lm	30 3000K	WA Wide	DIM 1-10V
			90 900mm	G Grey				150 15000lm	40 4000K	Asymmetric	DAL DALI
			90 900mm	D Dark Grey				180 18000lm	57 5700K	MA Medium	
				A Aluminum				225 22500lm		Asymmetric	
										NA Narrow	
										Asymmetric	


pro

round top

pro round top is an anti-glare post top light ideal for streets illumination. It is designed with corrosion-resistant die-cast aluminum double powder coated body with a clear diffuser to guarantee uniform light distribution

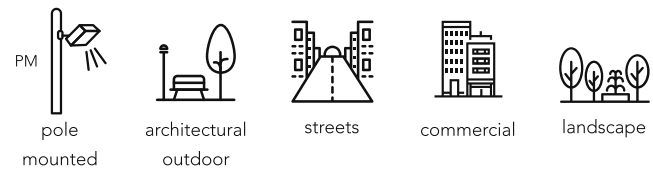

front view



General Luminaire Data

Body Color	    matt black grey bronze anthracite grey
Diffuser Color	 transparent
Body Material	Aluminum
Diffuser Material	Glass
Ingress Protection	66
Lifetime	50,000hrs


Electrical Characteristics

Voltage	220-240V
Frequency	50-60Hz
Power Factor	0.9
Protection	Class II
Wattage	50 70 100 150W
Control	DIG On-Off DIM 1-10V DALI

Photometry & Performance


Light Source	LED SMD
Delivered Output	6000 8400 12000 18000lm
Luminaire Efficacy	120lm/W
CRI	80
CCT	   2700K3000K4000K   5000K6500K

Beam Angle

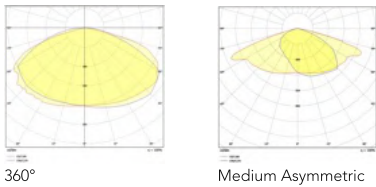

Accessories

Included	Control Gear
Sold Separately	Pole
	Honeycomb Louvre

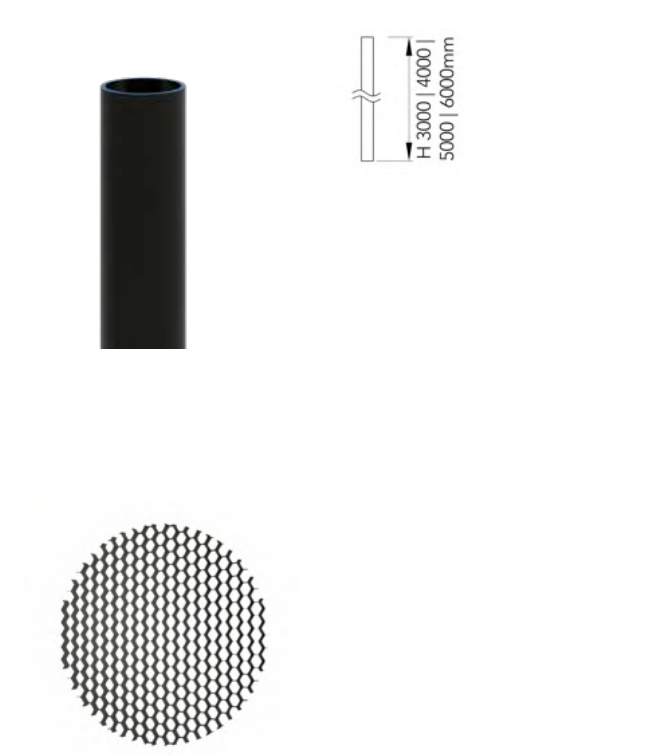

Certifications & Standards

CE
RoHS
LM80
IEC61347

pro round pole

pro round pole is a pole mounted accessory used for pro round top

L 3000mm PRPPM30BNNONOTNONONOT
L 4000mm PRPPM40BNNONOTNONONOT
L 5000mm PRPPM50BNNONOTNONONOT
L 6000mm PRPPM60BNNONOTNONONOT

Body Color  Black  Grey
 Bronze  AnthraciteGrey

Body Material Aluminum

pro round honeycomb

pro round honeycomb is a honeycomb accessory design to used for optimal glare control

PFHSMNOBNNONOTNONONOT

*honeycomb available on request

Body Color  Black
Body Material Aluminum


Product Code

P	R	T	PM	45	B	T	66	OUT	CT	BM	CON
Family	Sub	Product	Mounting	Dimension	Body	Diffuser	IP	Output	CCT	Beam	Control
					B Black Matt			600 6000lm	27 2700K	36 360deg	DIG On-Off
					G Grey			840 8400lm	30 3000K	MA Medium	DIM 1-10V
					B Bronze			120 12000lm	40 4000K	Asymmetric	DAL DALI
					A Anthracite			180 18000lm	50 5000K		
					Grey				65 6500K		


pro

square top


pro square top is a square-cone design which seamlessly blends classic architectural elegance with modern aesthetics, creating a captivating city nightscape

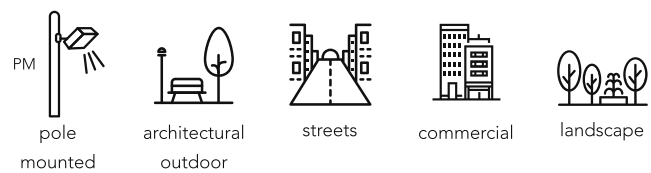

front view



bottom view




General Luminaire Data

Body Color	matt black matt white grey dark grey aluminum
Diffuser Color	transparent
Body Material	Aluminum
Diffuser Material	Glass
Ingress Protection	66
Lifetime	50,000hrs

Photometry & Performance

Light Source	LED SMD
Delivered Output	3600 4800 7200lm
Luminaire Efficacy	120lm/W
CRI	80
CCT	2700K 3000K 4000K 5000K 6500K

Beam Angle

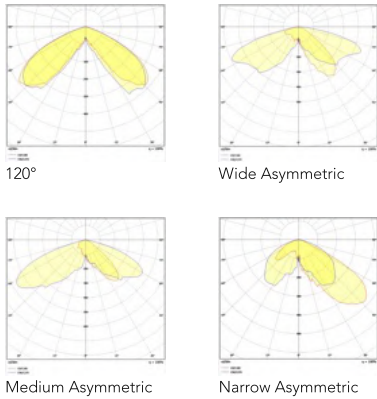


Electrical Characteristics

Voltage	220-240V
Frequency	50-60Hz
Power Factor	0.9
Protection	Class II
Wattage	30 40 60W
Control	DIG On-Off DALI

Accessories

Included	Control Gear
Sold Separately	Pole
	Bracket
	Pole Adapter

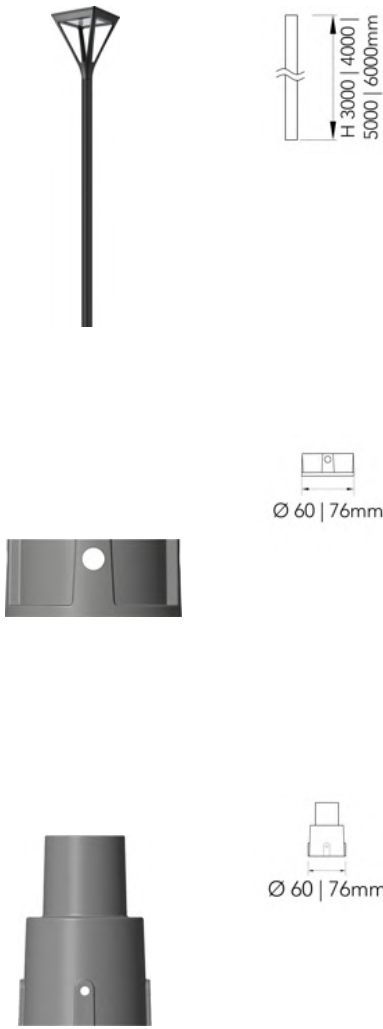

Certifications & Standards

CE
RoHS
LM80
IEC61347

pro square pole

pro square pole is a pole mounted accessory used for pro square top

L 3000mm PSPPM30BNNONOTNONONOT
L 4000mm PSPPM40BNNONOTNONONOT
L 5000mm PSPPM50BNNONOTNONONOT
L 6000mm PSPPM60BNNONOTNONONOT

Body Color Black White Grey
 Dark Grey Aluminum

Body Material Aluminum

pro square bracket

pro square bracket is a mounting bracket accessory used to secure pro square top to the pro square pole

Ø 60mm PSBSM60BNNONOTNONONOT
Ø 76mm PSBSM76BNNONOTNONONOT

Body Color Black White Grey
 Dark Grey Aluminum

Body Material Aluminum

pro square adapter

pro square adapter is a pole adapter accessory used to secure pro square top by reducing gaps and preventing loose connections

Ø 60mm PSASM60BNNONOTNONONOT
Ø 76mm PSASM76BNNONOTNONONOT

Body Color Black White Grey
 Dark Grey Aluminum

Body Material Aluminum


Product Code

P	S	T	PM	38	B	T	66	OUT	CT	BM	CON
Family	Sub	Product	Mounting	Dimension	Body	Diffuser	IP	Output	CCT	Beam	Control
					B Black Matt			360 3600lm	27 2700K	12 120deg	DIG On-Off
					W White Matt			480 4800lm	30 3000K	WA Wide	DAL DALI
					G Grey			720 7200lm	40 4000K	Asymmetric	
					D Dark Grey				50 5000K	MA Medium	
					A Aluminum				65 6500K	Asymmetric	
										NA Narrow	
										Asymmetric	



pro

cone top

pro cone top is a smart street lighting fixture features a durable die-cast aluminum body and offers PC transparent or prismatic diffuser options. Its high-quality PC lens delivers uniform, visually comfortable lighting with multiple distribution choices for versatile urban and roadway applications

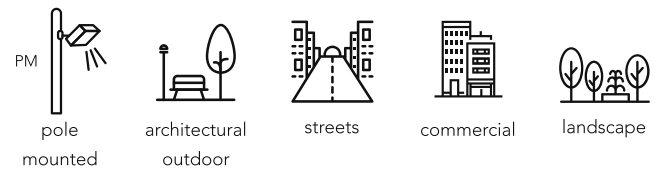

front view

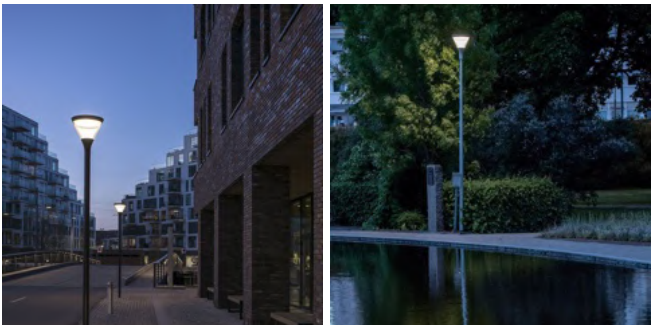


General Luminaire Data

Body Color				
	matt black	matt white	grey	aluminum
Diffuser Color				
	transparent			
Body Material	Aluminum			
Diffuser Material	Polycarbonate			
Ingress Protection	66			
Lifetime	50,000hrs			

Electrical Characteristics

Voltage	100-240V
Frequency	50-60Hz
Power Factor	0.9
Protection	Class II
Wattage	40 60 80W
Control	DIG On-Off DIM 0-10V DALI

Photometry & Performance

Light Source	LED SMD
Delivered Output	5520 8280 11040lm
Luminaire Efficacy	138lm/W
CRI	80
CCT	 2700K  3000K  4000K  5700K
Beam Angle	 120°

Accessories

Included	Control Gear
Sold Separately	Pole



Certifications & Standards

CE
RoHS
LM80
IEC61347

pro cone pole

pro cone pole is a pole mounted accessory used for pro cone top

PCPSMNOBNNNONOTNONONOT

PCPSMNOWNNONOTNONONOT

PCPSMNOGNNNONOTNONONOT

PCPSMNOANNONOTNONONOT

*height can be customized upon request

Body Color

Black

White

Grey

Aluminum

Body Material Aluminum


Product Code

P	C	T	PM	61	B	T	66	OUT	CT	12	CON
Family	Sub	Product	Mounting	Dimension	Body	Diffuser	IP	Output	CCT	Beam	Control
					B Black Matt			552 5520lm	27 2700K		DIG On-Off
					W White Matt			828 8280lm	30 3000K		DIM 0-10V
					G Grey			40 4000K			DAL DALI
					A Aluminum			110 11040lm	57 5700K		



pro

cone top

pro cone top is a smart street lighting fixture features a durable die-cast aluminum body and offers PC transparent or prismatic diffuser options. Its high-quality PC lens delivers uniform, visually comfortable lighting with multiple distribution choices for versatile urban and roadway applications

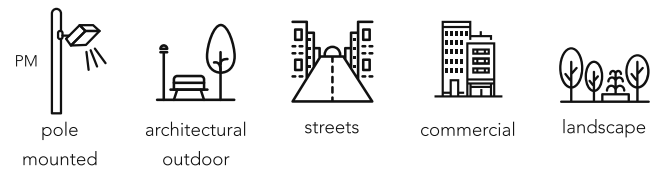

front view

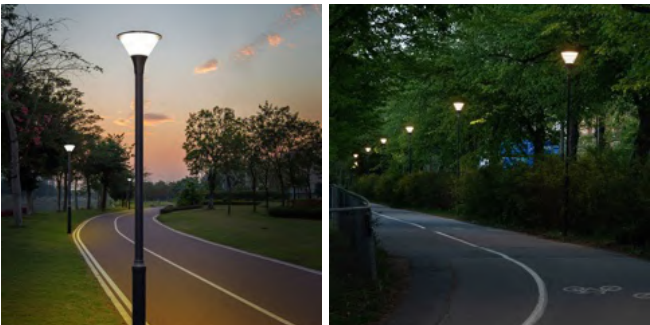

General Luminaire Data

Body Color	matt black matt white grey aluminum
Diffuser Color	prismatic
Body Material	Aluminum
Diffuser Material	Polycarbonate
Ingress Protection	66
Lifetime	50,000hrs


Electrical Characteristics

Voltage	100-240V
Frequency	50-60Hz
Power Factor	0.9
Protection	Class II
Wattage	30 40 60 80W
Control	DIG On-Off DIM 0-10V DALI

Photometry & Performance

Light Source	LED SMD
Delivered Output	3660 4880 7320 9760lm
Luminaire Efficacy	122lm/W
CRI	80
CCT	2700K 3000K 4000K 5700K

Beam Angle

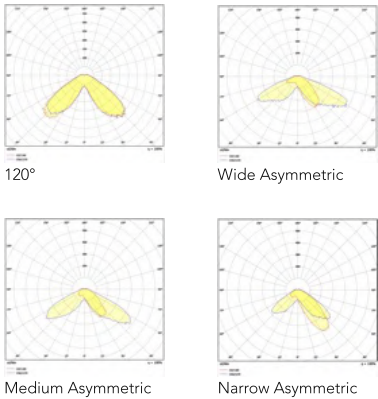

Accessories

Included	Control Gear
Sold Separately	Pole



Certifications & Standards

CE
RoHS
LM80
IEC61347

pro cone pole

pro cone pole is a pole mounted accessory used for pro cone top

PCPSMNOBNNONOTNONONOT
PCPSMNOWNNONOTNONONOT
PCPSMNOGNNONOTNONONOT
PCPSMNOANNONOTNONONOT

*height can be customized upon request

Body Color

Black

White

Grey

Aluminum

Body Material Aluminum


Product Code

P	C	T	PM	60	B	P	66	OUT	CT	BM	CON
Family	Sub	Product	Mounting	Dimension	Body	Diffuser	IP	Output	CCT	Beam	Control
					B Black Matt			366 3660lm	27 2700K	12 120deg	DIG On-Off
					W White Matt			488 4880lm	30 3000K	WA Wide	DIM 0-10V
					G Grey			732 7320lm	40 4000K	Asymmetric	DAL DALI
					A Aluminum			976 9760lm	57 5700K	MA Medium	
										Asymmetric	
										NA Narrow	
										Asymmetric	


pro

plate top

pro plate top features a durable die-cast aluminum body and a clear diffuser, ensuring superior visual comfort and a consistent, even distribution of light. Its versatility makes it ideal for illuminating pathways and landscapes

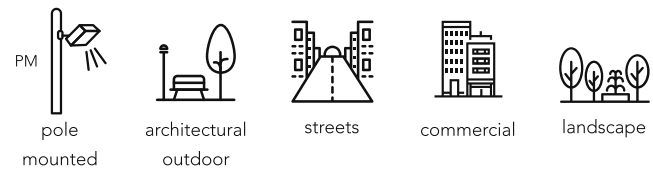

side view




General Luminaire Data

Body Color	matt black matt white grey aluminum
Diffuser Color	transparent
Body Material	Aluminum
Diffuser Material	Glass
Ingress Protection	66
Lifetime	50,000hrs

Photometry & Performance

Light Source	LED SMD
Delivered Output	4400 6600 8800lm
Luminaire Efficacy	110lm/W
CRI	80
CCT	2700K 3000K 4000K 5700K

Beam Angle

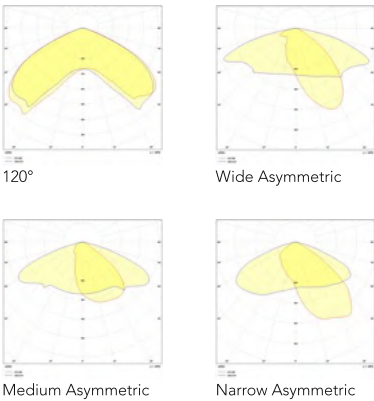

Electrical Characteristics

Voltage	120-270V
Frequency	50-60Hz
Power Factor	0.9
Protection	Class II
Wattage	40 60 80W
Control	DIG On-Off DIM 0-10V DALI

Accessories

Included	Control Gear
Sold Separately	Pole



Certifications & Standards

CE
RoHS
LM80
IEC61347

pro plate pole

pro plate pole is a pole mounted accessory used for pro plate top

PPPSMNOBNNONOTNONONOT
PPPSMNOWNNONOTNONONOT
PPPSMNOGNNONOTNONONOT
PPPSMNOANNONOTNONONOT

*height can be customized upon request

Body Color

Black

White

Grey

Aluminum

Body Material Aluminum


Product Code

P	P	T	PM	49	B	T	66	OUT	CT	BM	CON
Family	Sub	Product	Mounting	Dimension	Body	Diffuser	IP	Output	CCT	Beam	Control
					B Black Matt			440 4400lm	27 2700K	12 120deg	DIG On-Off
					W White Matt			660 6600lm	30 3000K	WA Wide	DIM 0-10V
					G Grey			880 8800lm	40 4000K	Asymmetric	DAL DALI
					A Aluminum				57 5700K	MA Medium	
										Asymmetric	
										NA Narrow	
										Asymmetric	



pro

plate top

pro plate top features a durable die-cast aluminum body and a clear diffuser, ensuring superior visual comfort and a consistent, even distribution of light. Its versatility makes it ideal for illuminating pathways and landscapes

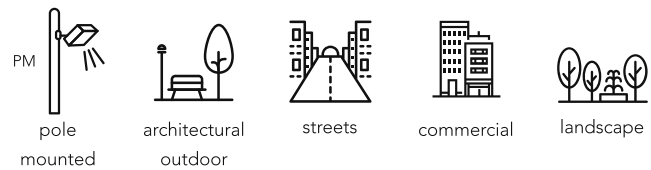

front view

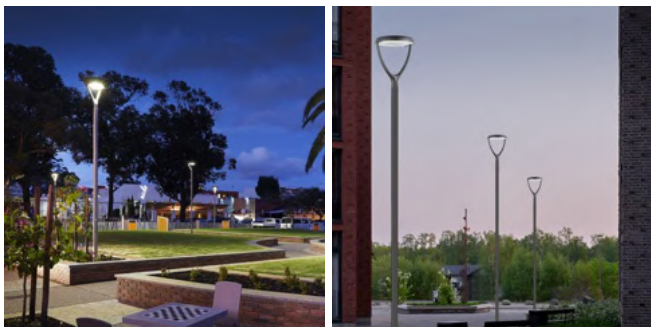


General Luminaire Data

Body Color	matt black matt white grey aluminum
Diffuser Color	transparent
Body Material	Aluminum
Diffuser Material	Glass
Ingress Protection	66
Lifetime	50,000hrs

Photometry & Performance

Light Source	LED SMD
Delivered Output	6080 9120 12160lm
Luminaire Efficacy	152lm/W
CRI	80
CCT	2700K 3000K 4000K 5700K

Beam Angle

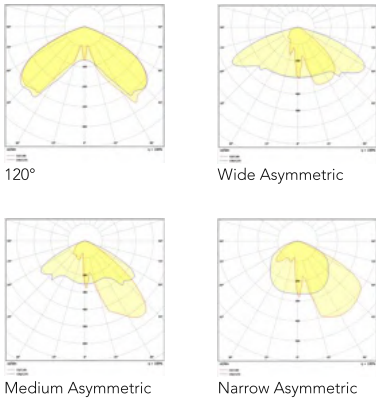

Electrical Characteristics

Voltage	120-270V
Frequency	50-60Hz
Power Factor	0.9
Protection	Class II
Wattage	40 60 80W
Control	DIG On-Off DIM 0-10V DALI

Accessories

Included	Control Gear
Sold Separately	Pole



Certifications & Standards

CE
RoHS
LM80
IEC61347

pro plate pole

pro plate pole is a pole mounted accessory used for pro plate top

PPPSMNOBNNONOTNONONOT
PPPSMNOWNNONOTNONONOT
PPPSMNOGNNONOTNONONOT
PPPSMNOANNONOTNONONOT

*height can be customized upon request

Body Color

Black

White

Grey

Aluminum

Body Material Aluminum


Product Code

P	P	T	PM	49	B	T	66	OUT	CT	BM	CON
Family	Sub	Product	Mounting	Dimension	Body	Diffuser	IP	Output	CCT	Beam	Control
					B Black Matt			608 6080lm	27 2700K	12 120deg	DIG On-Off
					W White Matt			912 9120lm	30 3000K	WA Wide	DIM 0-10V
					G Grey			121 12160lm	40 4000K	Asymmetric	DAL DALI
					A Aluminum				57 5700K	MA Medium	
										Asymmetric	
										NA Narrow	
										Asymmetric	

pro


disk top

pro disk top is a street light LED that features its die-cast aluminum body, clear diffuser, and three installation modes. Its PC lens ensures uniform, comfortable lighting, while smart control technology allows compatibility with remote management system

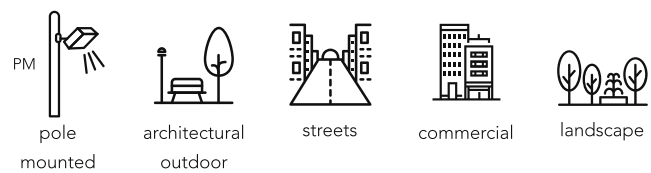

front view

bottom view




General Luminaire Data

Body Color	matt black matt white grey aluminum
Diffuser Color	transparent
Body Material	Aluminum
Diffuser Material	Glass
Ingress Protection	66
Lifetime	50,000hrs

Photometry & Performance

Light Source	LED SMD
Delivered Output	36240 49830 54360lm
Luminaire Efficacy	151lm/W
CRI	80
CCT	2700K 3000K 4000K 5700K

Beam Angle

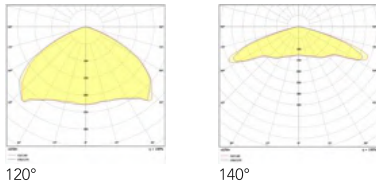

Electrical Characteristics

Voltage	100-240V
Frequency	50-60Hz
Power Factor	0.9
Protection	Class II
Wattage	240 330 360W
Control	DIG On-Off DIM 0-10V DALI

Accessories

Included	Control Gear
Sold Separately	Pole



Certifications & Standards

CE
RoHS
LM80
IEC61347

pro disk pole

pro disk pole is a pole mounted accessory used for pro disk top

PDP SMNOBNNONOTNONONOT

PDP SMNOWNNONOTNONONOT

PDP SMNOGNNONOTNONONOT

PDP SMNOANNONOTNONONOT

*height can be customized upon request

Body Color	Black	White
	Grey	Aluminum

Body Material Aluminum


Product Code

P	D	T	PM	93	B	T	66	OUT	CT	BM	CON
Family	Sub	Product	Mounting	Dimension	Body	Diffuser	IP	Output	CCT	Beam	Control
					B Black Matt			362 36240lm	27 2700K	12 120deg	DIG On-Off
					W White Matt			498 49830lm	30 3000K	14 140deg	DIM 0-10V
					G Grey			543 54360lm	40 4000K		DAL DALI
					A Aluminum				57 5700K		

pro


disk top

pro disk top is a street light LED that features its die-cast aluminum body, clear diffuser, and three installation modes. Its PC lens ensures uniform, comfortable lighting, while smart control technology allows compatibility with remote management system

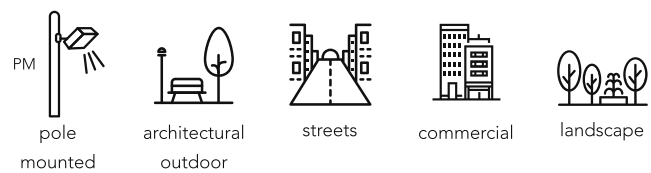

side view

bottom view

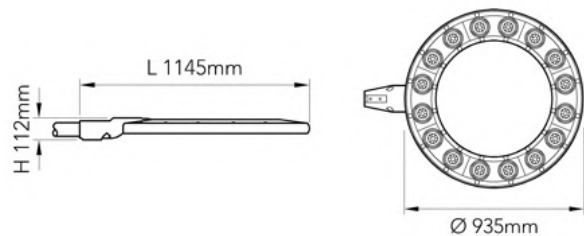

General Luminaire Data

Body Color	matt black matt white grey aluminum
Diffuser Color	transparent
Body Material	Aluminum
Diffuser Material	Glass
Ingress Protection	66
Lifetime	50,000hrs


Electrical Characteristics

Voltage	100-240V
Frequency	50-60Hz
Power Factor	0.9
Protection	Class II
Wattage	150 200 240W
Control	DIG On-Off DIM 0-10V DALI

Photometry & Performance

Light Source	LED SMD
Delivered Output	23100 30800 36960lm
Luminaire Efficacy	154lm/W
CRI	80
CCT	2700K 3000K 4000K 5700K

Beam Angle

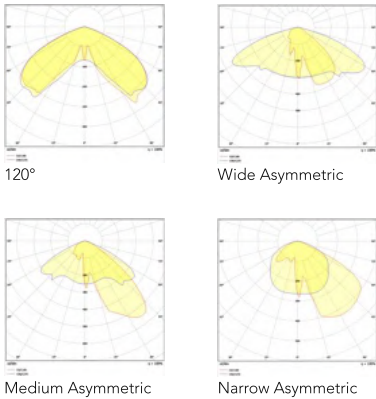

Accessories

Included	Control Gear
Sold Separately	Pole



Certifications & Standards

CE
RoHS
LM80
IEC61347

pro disk pole

pro disk pole is a pole mounted accessory used for pro disk top

PDPSMNOBNNNONOTNONONOT

PDPSMNOWNNONOTNONONOT

PDPSMNOGNNNONOTNONONOT

PDPSMNOANNONOTNONONOT

*height can be customized upon request

Body Color

Black

White

Grey

Aluminum

Body Material Aluminum


Product Code

P	D	T	PM	93	B	T	66	OUT	CT	BM	CON
Family	Sub	Product	Mounting	Dimension	Body	Diffuser	IP	Output	CCT	Beam	Control
					B Black Matt			231 23100lm	27 2700K	12 120deg	DIG On-Off
					W White Matt			308 30800lm	30 3000K	WA Wide	DIM 0-10V
					G Grey			369 36960lm	40 4000K	Asymmetric	DAL DALI
					A Aluminum				57 5700K	MA Medium	
										Asymmetric	
										NA Narrow	
										Asymmetric	


pro

disk top



pro disk top is a street light LED that features its die-cast aluminum body, clear diffuser, and three installation modes. Its PC lens ensures uniform, comfortable lighting, while smart control technology allows compatibility with remote management system

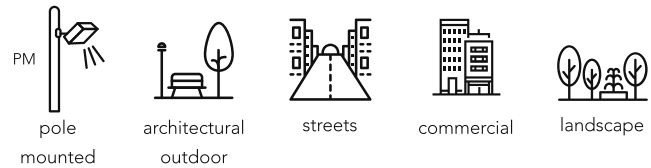

side view



bottom view

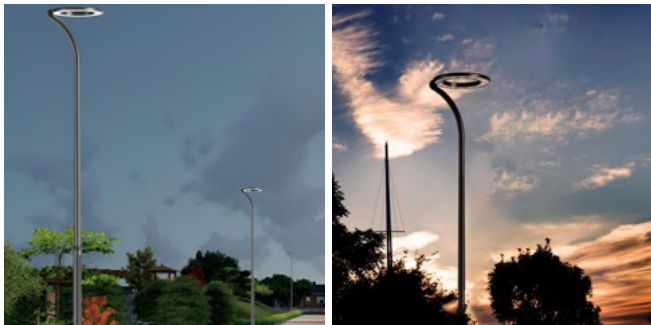

General Luminaire Data

Body Color	matt black matt white grey aluminum
Diffuser Color	transparent
Body Material	Aluminum
Diffuser Material	Glass
Ingress Protection	66
Lifetime	50,000hrs


Electrical Characteristics

Voltage	100-240V
Frequency	50-60Hz
Power Factor	0.9
Protection	Class II
Wattage	150 200 240W
Control	DIG On-Off DIM 0-10V DALI

Photometry & Performance

Light Source	LED SMD
Delivered Output	21450 28600 34320lm
Luminaire Efficacy	143lm/W
CRI	80
CCT	2700K 3000K 4000K 5700K

Beam Angle

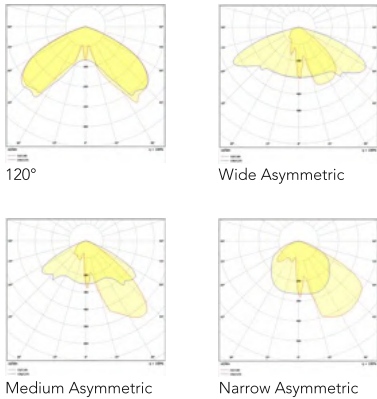

Accessories

Included	Control Gear
Sold Separately	Pole



Certifications & Standards

CE
RoHS
LM80
IEC61347

pro disk pole

pro disk pole is a pole mounted accessory used for pro disk top

PDPSMNOBNNONOTNONONOT
PDPSMNOWNNONOTNONONOT
PDPSMNOGNNONOTNONONOT
PDPSMNOANNONOTNONONOT

*height can be customized upon request

Body Color

Black

White

Grey

Aluminum

Body Material Aluminum



Product Code

P	D	T	PM	93	B	T	66	OUT	CT	BM	CON
Family	Sub	Product	Mounting	Dimension	Body	Diffuser	IP	Output	CCT	Beam	Control
					B Black Matt			214 21450lm	27 2700K	12 120deg	DIG On-Off
					W White Matt			286 28600lm	30 3000K	WA Wide	DIM 0-10V
					G Grey			343 34320lm	40 4000K	Asymmetric	DAL DALI
					A Aluminum				57 5700K	MA Medium	
										Asymmetric	
										NA Narrow	
										Asymmetric	

pro

cobra top


pro cobra top is a distinctive lighting solution designed for urban streets and pathways. Its unique circular design stands out as a modern and aesthetic addition to walkways, while its efficient illumination enhances safety and visibility at night

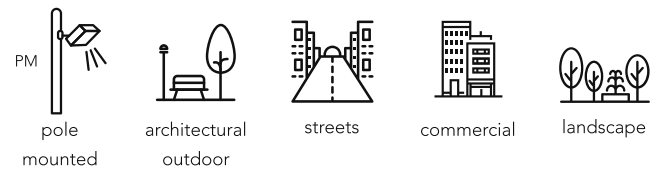

General Luminaire Data

*available upon request

Body Color



Diffuser Color



Body Material	Aluminum
Diffuser Material	Polycarbonate
Ingress Protection	66
Lifetime	50,000hrs


Electrical Characteristics

Voltage	100-277V
Frequency	50-60Hz
Power Factor	0.9
Protection	Class II
Wattage	40 60 100W
Control	DIG On-Off DIM 1-10V DALI

Photometry & Performance


Light Source	LED SMD
Delivered Output	4800 7200 12000lm
Luminaire Efficacy	120lm/W
CRI	80
CCT	3000K 4000K

Beam Angle

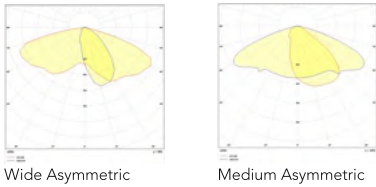

Accessories

Included	Control Gear
Sold Separately	Pole
	NEMA Socket



Certifications & Standards

CE
RoHS
LM80
IEC61347

pro cobra pole

pro round pole is a pole mounted accessory used for pro round top

- L 3000mm PCPPM20SNNONOTNONONOT
- L 4000mm PCPPM20SNNONOTNONONOT
- L 5000mm PCPPM20SNNONOTNONONOT
- L 6000mm PCPPM20SNNONOTNONONOT

Body Color Silver
Body Material Steel

pro cobra socket

pro cobra socket is a NEMA socket used to provide a reliable, safe, and convenient way to connect and disconnect electrical devices
PCSSMNOBNNONOTNONONOT

*NEMA socket available on request

Body Color Black
Body Material PBT (Polybutylene terephthalate)

Product Code

P	C	T	PM	48	S	T	66	OUT	CT	BM	CON
Family	Sub	Product	Mounting	Dimension	Body	Diffuser	IP	Output	CCT	Beam	Control
								480 4800lm	30 3000K	WA Wide	DIG On-Off
								720 7200lm	40 4000K	Asymmetric	DIM 1-10V
								120 12000lm		MA Medium	DAL DALI
										Asymmetric	



recessed ingrounds

our exceptional range of recessed inground lighting is meticulously crafted to enhance outdoor spaces with lasting elegance and cutting-edge functionality

beyond their captivating design, these luminaires offer gentle yet abundant illumination that enhances landscapes and pathways. This ensures not only improved aesthetics but also heightened safety and security in outdoor environments



durable body
material



diverse beam
angles



safe to walk over



IP rating




wide range of
wattages



functional
lighting





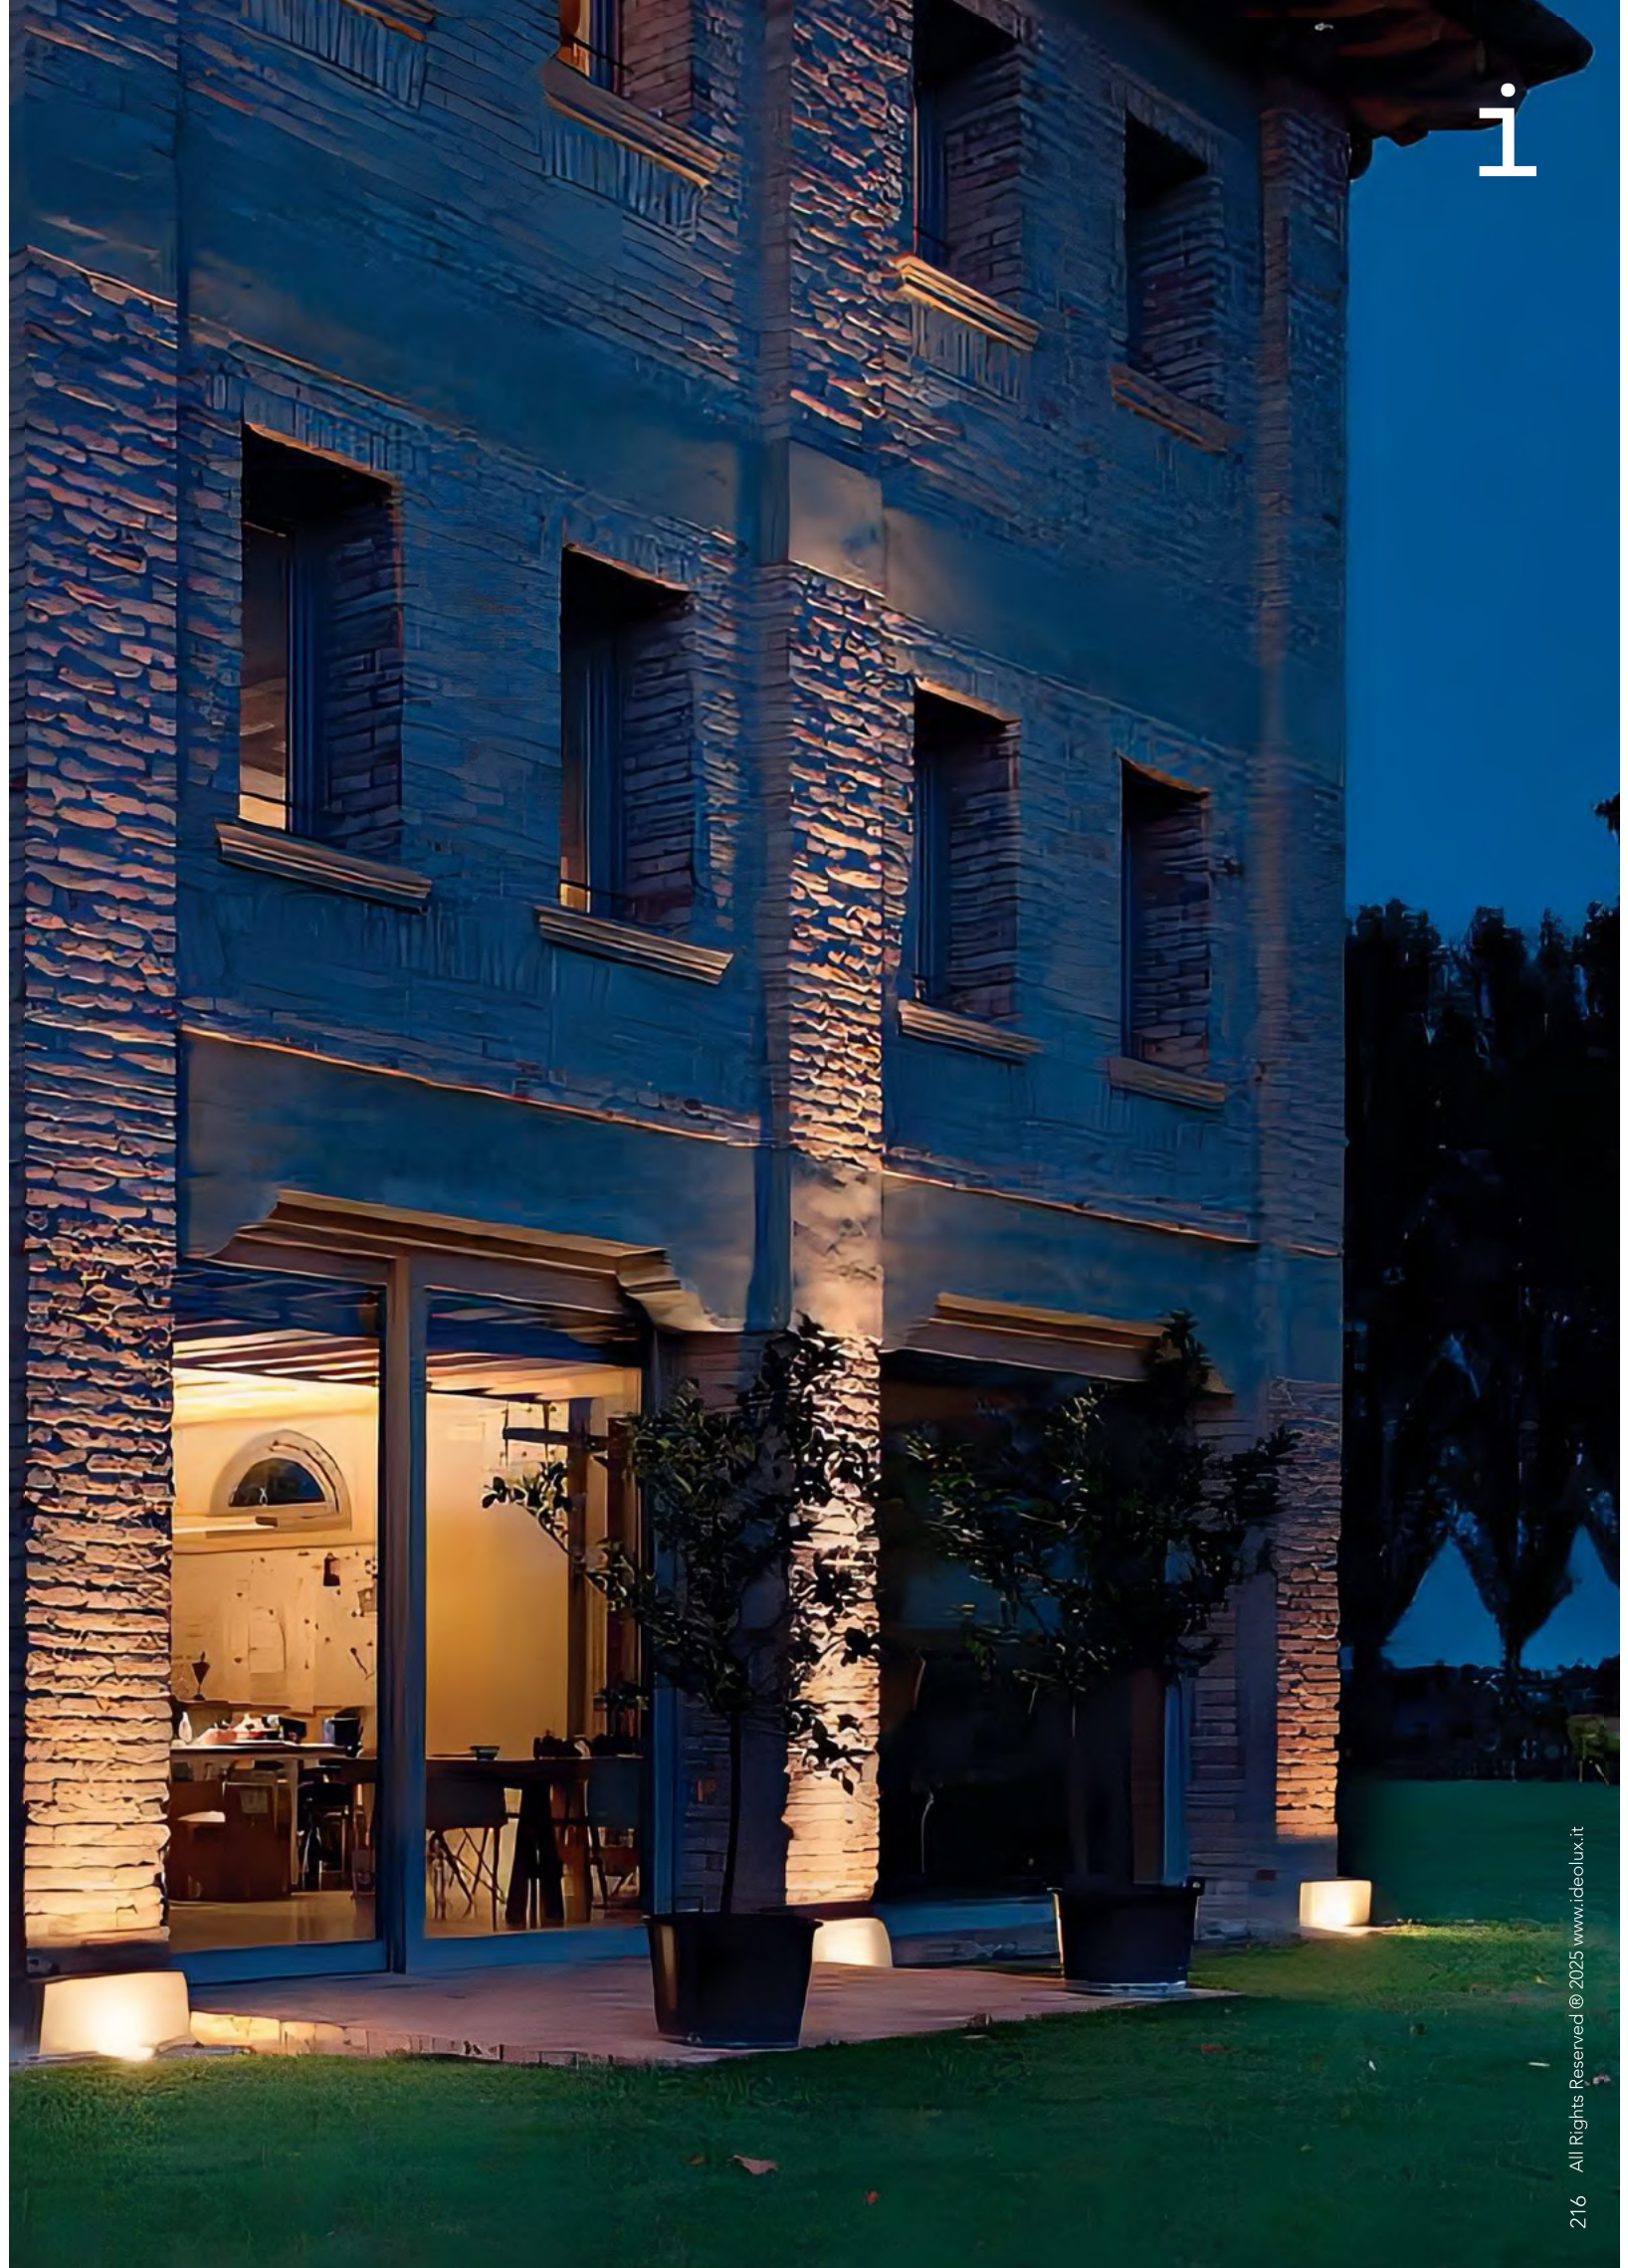

pro

round up

pro round up is a round inground recessed LED uplight with wide variety of lumen outputs and beam angles. It is an essential element in highlighting special features of patios, garden, and walkways

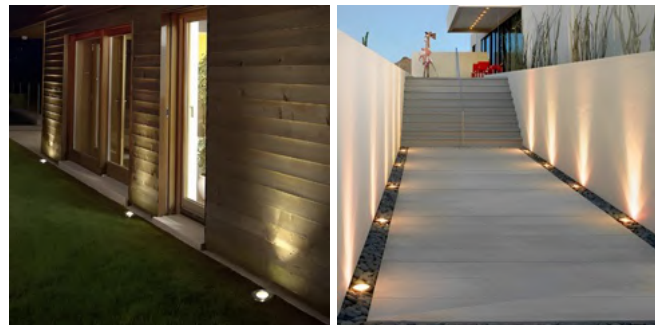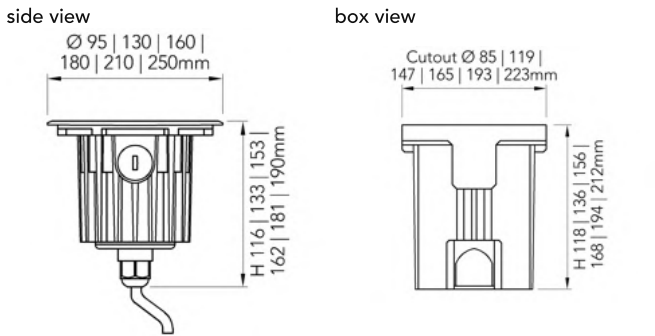

General Luminaire Data

Body Color	 stainless steel
Diffuser Color	 transparent
Body Material	Stainless Steel + Aluminum
Diffuser Material	Glass
Ingress Protection	67
Lifetime	50,000hrs


Electrical Characteristics

Voltage	220-240V
Frequency	50-60Hz
Power Factor	0.9
Protection	Class II
Wattage	4 6 13 20 25 35W
Control	DIG On-Off TRIAC DIM 1-10V DGX DIG On-Off DMX Ready DALI

Photometry & Performance


Light Source	LED COB
Delivered Output	Single Color 360 540 1170 1800 2250 3150lm RGBW 80 120 260 400 500 700lm
Luminaire Efficacy	90lm/W RGBW 20lm/W
CRI	80
CCT	2200K 2700K 3000K 3500K 4000K 5000K 5700K 6000K 6500K RGBW

Beam Angle

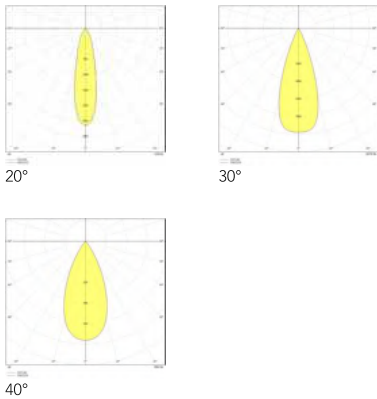

Accessories

Included	Control Gear
	Recessing Box
Sold Separately	Honeycomb
	Filter

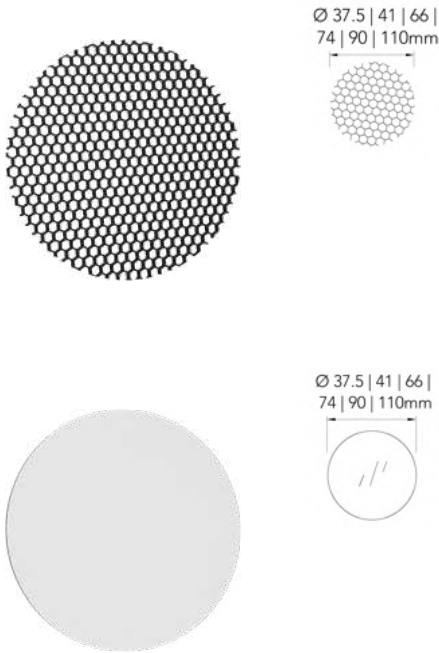

Certifications & Standards

CE
RoHS
LM80
IEC61347

pro up honeycomb

pro up honeycomb is a diffuser accessory that offers enhanced glare control and uniform light distribution

Ø 37.5mm	PUHSM37BNNONOTNONONOT
Ø 41mm	PUHSM41BNNONOTNONONOT
Ø 66mm	PUHSM66BNNONOTNONONOT
Ø 74mm	PUHSM74BNNONOTNONONOT
Ø 90mm	PUHSM90BNNONOTNONONOT
Ø 110mm	PUHSM11BNNONOTNONONOT

Body Color Black
Body Material Aluminum

pro up filter

pro up filter is a diffuser accessory that makes the light distribution softer

Ø 37.5mm	PUFSM37BNNONOTNONONOT
Ø 41mm	PUFSM41BNNONOTNONONOT
Ø 66mm	PUFSM66BNNONOTNONONOT
Ø 74mm	PUFSM74BNNONOTNONONOT
Ø 90mm	PUFSM90BNNONOTNONONOT
Ø 110mm	PUFSM11BNNONOTNONONOT

Body Color Transparent
Body Material Glass

Product Code

*Parameters not **interselectable**. Each dimension to be matched with corresponding output
**For RGBW variations only

P	R	U	IR	DM*	S	T	67	OUT*	CT	BM	CON
Family	Sub	Product	Mounting	Dimension	Body	Diffuser	IP	Output	CCT	Beam	Control
				95 95mm				360 360lm	22 2200K	20 20deg	DIG On-Off
				13 130mm				540 540lm	27 2700K	30 30deg	TRI TRIAC
				16 160mm				117 1170lm	30 3000K	40 40deg	DIM 1-10V
				18 180mm				180 1800lm	35 3500K		DGX DIG On-Off
				21 210mm				225 2250lm	40 4000K		DMX Ready**
				25 250mm				315 3150lm	50 5000K		DAL DALI
				95 95mm				080 080lm**	57 5700K		
				13 130mm				120 120lm**	60 6000K		
				16 160mm				260 260lm**	65 6500K		
				18 180mm				400 400lm**	RW RGBW**		
				21 210mm				500 500lm**			
				25 250mm				700 700lm**			


pro

tilt up



pro tilt up is equipped with precise optics and multiple lumen outputs. It is featured with adjustable lens angle and several beam angles which produces impressive impacts on driveways and walkways



side view



box view

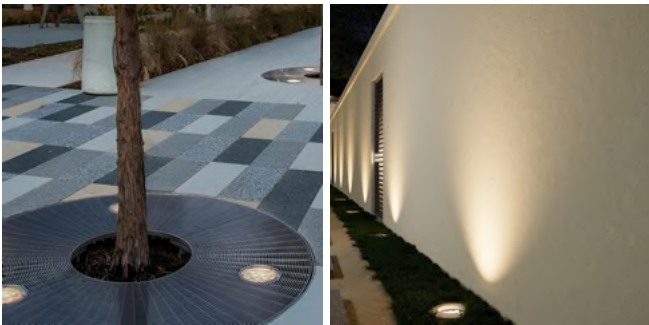

General Luminaire Data

Body Color



stainless steel

Diffuser Color



transparent

Body Material

Stainless Steel + Aluminum

Diffuser Material

Glass

Ingress Protection

67

Lifetime

50,000hrs

Electrical Characteristics

Voltage

220-240V

Frequency

50-60Hz

Power Factor

0.9

Protection

Class II

Wattage

2 | 6 | 12 | 18 | 27 | 36W

Control

DIG On-Off | TRIAC | DIM 1-10V |
DGX DIG On-Off DMX Ready | DALI

Photometry & Performance

Light Source

LED SMD

Delivered Output

Single Color 180 | 540 | 1080 | 1620 | 2430 |
3240lm

RGBW 040 | 120 | 240 | 360 | 540 | 720lm


Luminaire Efficacy

90lm/W | RGBW 20lm/W


CRI

80

CCT

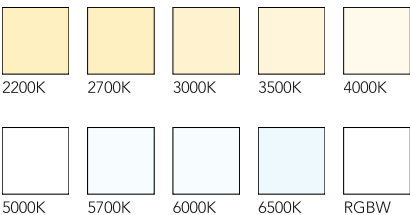


Beam Angle

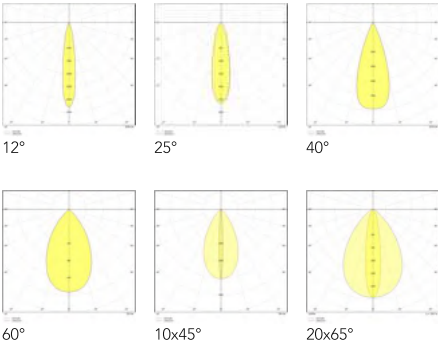

Accessories

Included	Control Gear
	Recessing Box
Sold Separately	Honeycomb
	Filter

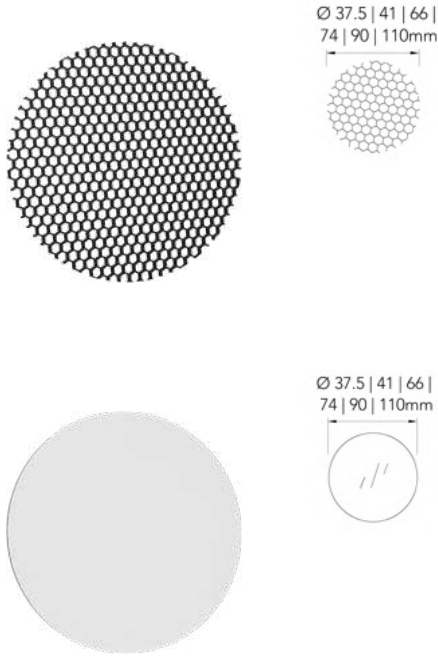

Certifications & Standards

CE
RoHS
LM80
IEC61347

pro up honeycomb

pro up honeycomb is a diffuser accessory that offers enhanced glare control and uniform light distribution

Ø 37.5mm	PUHSM37BNNONOTNONONOT
Ø 41mm	PUHSM41BNNONOTNONONOT
Ø 66mm	PUHSM66BNNONOTNONONOT
Ø 74mm	PUHSM74BNNONOTNONONOT
Ø 90mm	PUHSM90BNNONOTNONONOT
Ø 110mm	PUHSM11BNNONOTNONONOT

Body Color  Black
Body Material Aluminum

pro up filter

pro up filter is a diffuser accessory that makes the light distribution softer

Ø 37.5mm	PUFSM37BNNONOTNONONOT
Ø 41mm	PUFSM41BNNONOTNONONOT
Ø 66mm	PUFSM66BNNONOTNONONOT
Ø 74mm	PUFSM74BNNONOTNONONOT
Ø 90mm	PUFSM90BNNONOTNONONOT
Ø 110mm	PUFSM11BNNONOTNONONOT

Body Color  Transparent
Body Material Glass

Product Code

*Parameters not **interselectable**. Each dimension to be matched with corresponding output
**For RGBW variations only

P	T	U	IA	DM*	S	T	67	OUT*	CT	BM	CON
Family	Sub	Product	Mounting	Dimension	Body	Diffuser	IP	Output	CCT	Beam	Control
				95 95mm				180 180lm	22 2200K	05 05deg	DIG On-Off
				13 130mm				540 540lm	27 2700K	08 08deg	TRI TRIAC
				16 160mm				108 1080lm	30 3000K	12 12deg	DIM 1-10V
				18 180mm				162 1620lm	35 3500K	25 25deg	DGX DIG On-Off
				21 210mm				243 2430lm	40 4000K	40 40deg	DMX Ready**
				25 250mm				324 3240lm	50 5000K	60 60deg	DAL DALI
				95 95mm				040 040lm**	57 5700K	10 10*45	
				13 130mm				120 120lm**	60 6000K	20 20*65	
				16 160mm				240 240lm**	65 6500K		
				18 180mm				360 360lm**	RW RGBW**		
				21 210mm				540 540lm**			
				25 250mm				720 720lm**			


pro

tilt up


pro tilt up is equipped with precise optics and multiple lumen outputs. It is featured with adjustable lens angle and several beam angles which produces impressive impacts on driveways and walkways



side view



box view



General Luminaire Data

Body Color	 stainless steel
Diffuser Color	 transparent
Body Material	Stainless Steel + Aluminum
Diffuser Material	Glass
Ingress Protection	67
Lifetime	50,000hrs


Electrical Characteristics

Voltage	220-240V
Frequency	50-60Hz
Power Factor	0.9
Protection	Class II
Wattage	6 12 20 25 35W
Control	DIG On-Off TRIAC DIM 1-10V DGX DIG On-Off DMX Ready DALI

Photometry & Performance


Light Source	LED COB
Delivered Output	Single Color 540 1080 1800 2250 3150lm RGBW 120 240 400 500 700lm
Luminaire Efficacy	90lm/W RGBW 20lm/W
CRI	80
CCT	 2700K  3000K  4000K  6000K  RGBW

Beam Angle

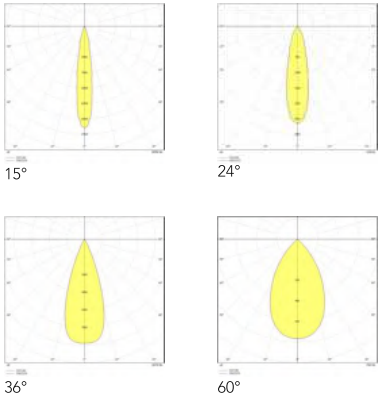

Accessories

Included	Control Gear
	Recessing Box
Sold Separately	Honeycomb
	Filter

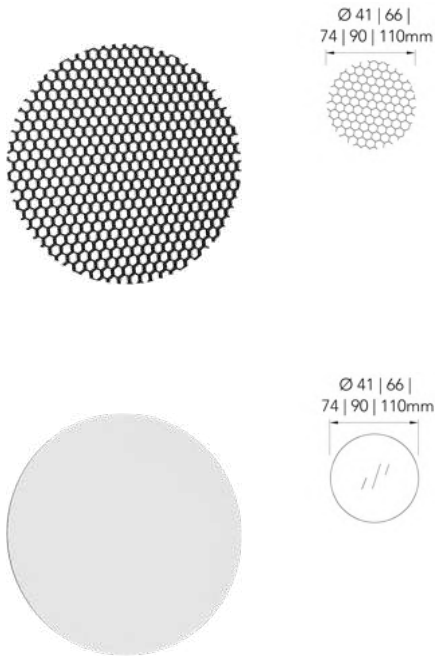

Certifications & Standards

CE
RoHS
LM80
IEC61347

pro up honeycomb

pro up honeycomb is a diffuser accessory that offers enhanced glare control and uniform light distribution

Ø 41mm	PUHSM41BNNONOTNONONOT
Ø 66mm	PUHSM66BNNONOTNONONOT
Ø 74mm	PUHSM74BNNONOTNONONOT
Ø 90mm	PUHSM90BNNONOTNONONOT
Ø 110mm	PUHSM11BNNONOTNONONOT

Body Color Black
Body Material Aluminum

pro up filter

pro up filter is a diffuser accessory that makes the light distribution softer

Ø 41mm	PUFSM41BNNONOTNONONOT
Ø 66mm	PUFSM66BNNONOTNONONOT
Ø 74mm	PUFSM74BNNONOTNONONOT
Ø 90mm	PUFSM90BNNONOTNONONOT
Ø 110mm	PUFSM11BNNONOTNONONOT

Body Color Transparent
Body Material Glass

Product Code

*Parameters not **interselectable**. Each dimension to be matched with corresponding output
**For RGBW variations only

P	T	U	IA	DM*	S	T	67	OUT*	CT	BM	CON
Family	Sub	Product	Mounting	Dimension	Body	Diffuser	IP	Output	CCT	Beam	Control
				13 130mm				540 540lm	27 2700K	15 15deg	DIG On-Off
				16 160mm				108 1080lm	30 3000K	24 24deg	TRI TRIAC
				18 180mm				180 1800lm	40 4000K	36 36deg	DIM 1-10V
				21 210mm				225 2250lm	60 6000K	60 60deg	DGX DIG On-Off
				25 250mm				315 3150lm	RW RGBW**		DMX Ready**
				13 130mm				120 120lm**			DAL DALI
				16 160mm				240 240lm**			
				18 180mm				400 400lm**			
				21 210mm				500 500lm**			
				25 250mm				700 700lm**			


pro

deep up



pro deep up is a round inground recessed LED uplight featuring deep optics, which enable precise beam control and light distribution. It stands as an essential element for accentuating the distinctive features of patios, gardens, and walkways



side view



box view

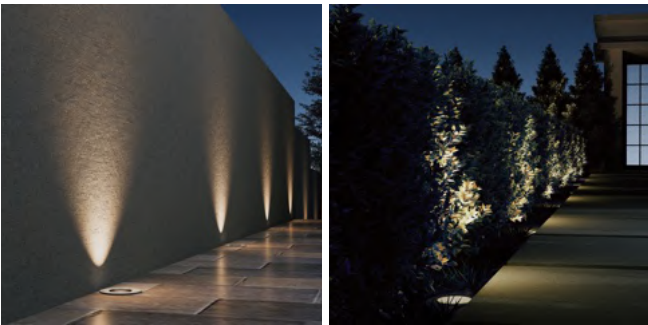

General Luminaire Data

Body Color



stainless steel

Diffuser Color



transparent

Body Material

Stainless Steel + Aluminum

Diffuser Material

Glass

Ingress Protection

67

Lifetime

50,000hrs

Photometry & Performance

Light Source

LED SMD

Delivered Output

Single Color 540 | 1080 | 1620 | 2160 | 3240lm
RGBW 120 | 240 | 360 | 480 | 720lm


Luminaire Efficacy

90lm/W | RGBW 20lm/W


CRI

80

CCT

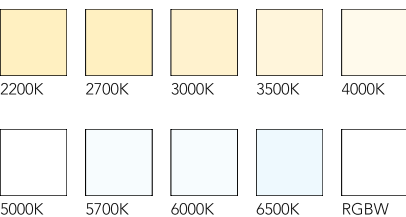

Beam Angle

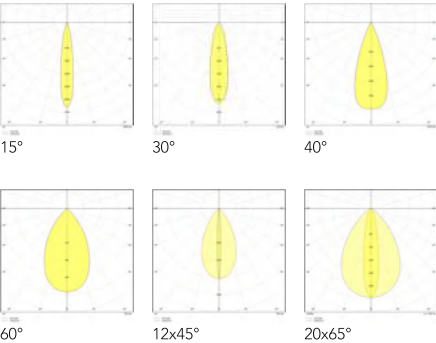

Electrical Characteristics

Voltage

220-240V

Frequency

50-60Hz

Power Factor

0.9

Protection

Class II

Wattage


6 | 12 | 18 | 24 | 36W

Control

DIG On-Off | TRIAC | DIM 1-10V |
DGX DIG On-Off DMX Ready | DALI

Accessories

Included	Control Gear
	Recessing Box
Sold Separately	Honeycomb
	Filter

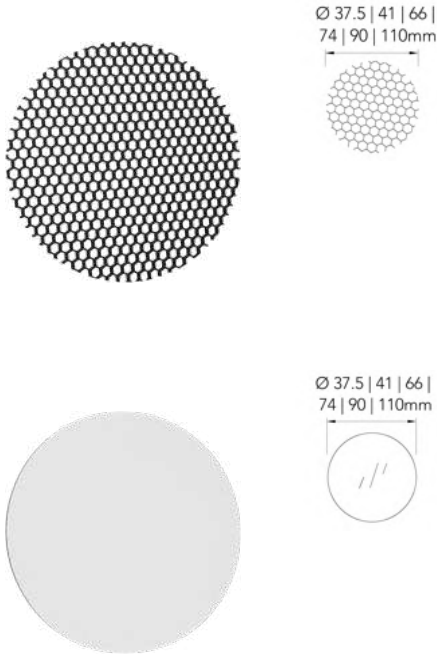

Certifications & Standards

CE
RoHS
LM80
IEC61347

pro up honeycomb

pro up honeycomb is a diffuser accessory that offers enhanced glare control and uniform light distribution

Ø 37.5mm	PUHSM37BNNONOTNONONOT
Ø 41mm	PUHSM41BNNONOTNONONOT
Ø 66mm	PUHSM66BNNONOTNONONOT
Ø 74mm	PUHSM74BNNONOTNONONOT
Ø 90mm	PUHSM90BNNONOTNONONOT
Ø 110mm	PUHSM11BNNONOTNONONOT

Body Color Black
Body Material Aluminum

pro up filter

pro up filter is a diffuser accessory that makes the light distribution softer

Ø 37.5mm	PUFSM37BNNONOTNONONOT
Ø 41mm	PUFSM41BNNONOTNONONOT
Ø 66mm	PUFSM66BNNONOTNONONOT
Ø 74mm	PUFSM74BNNONOTNONONOT
Ø 90mm	PUFSM90BNNONOTNONONOT
Ø 110mm	PUFSM11BNNONOTNONONOT

Body Color Transparent
Body Material Glass

Product Code

*Parameters not **interselectable**. Each dimension to be matched with corresponding output
**For RGBW variations only

P	D	U	IR	DM*	S	T	67	OUT*	CT	BM	CON
Family	Sub	Product	Mounting	Dimension	Body	Diffuser	IP	Output	CCT	Beam	Control
				13 130mm				540 540lm	22 2200K	10 10deg	DIG On-Off
				16 160mm				108 1080lm	27 2700K	15 15deg	TRI TRIAC
				18 180mm				162 1620lm	30 3000K	30 30deg	DIM 1-10V
				21 210mm				216 2160lm	35 3500K	40 40deg	DGX DIG On-Off
				25 250mm				324 3240lm	40 4000K	60 60deg	DMX Ready**
				13 130mm				120 120lm**	50 5000K	12 12*45	DAL DALI
				16 160mm				240 240lm**	57 5700K	20 20*65	
				18 180mm				360 360lm**	60 6000K		
				21 210mm				480 480lm**	65 6500K		
				25 250mm				720 720lm**	RW RGBW**		


pro

deep up


pro deep up is a round inground recessed LED uplight featuring deep optics, which enable precise beam control and light distribution. It stands as an essential element for accentuating the distinctive features of patios, gardens, and walkways



side view



box view



General Luminaire Data

Body Color	 stainless steel
Diffuser Color	 transparent
Body Material	Stainless Steel + Aluminum
Diffuser Material	Glass
Ingress Protection	67
Lifetime	50,000hrs


Electrical Characteristics

Voltage	220-240V
Frequency	50-60Hz
Power Factor	0.9
Protection	Class II
Wattage	6 13 20 25 35W
Control	DIG On-Off TRIAC DIM 1-10V DGX DIG On-Off DMX Ready DALI

Photometry & Performance


Light Source	LED COB
Delivered Output	Single Color 540 1170 1800 2250 3150lm RGBW 120 260 400 500 700lm
Luminaire Efficacy	90lm/W RGBW 20lm/W
CRI	80
CCT	 2700K  3000K  4000K  6000K  RGBW

Beam Angle

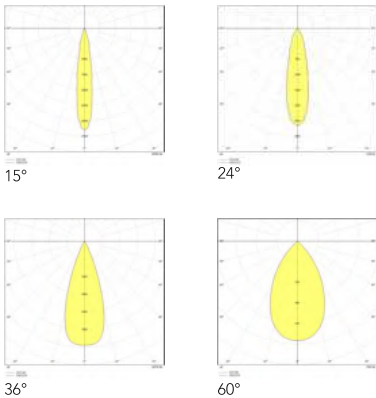

Accessories

Included	Control Gear
	Recessing Box
Sold Separately	Honeycomb
	Filter

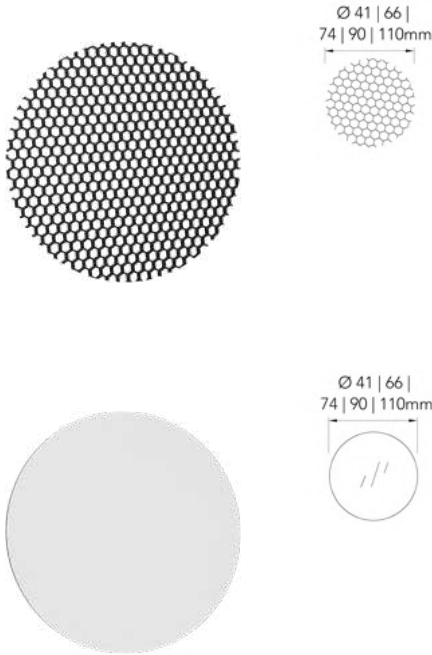

Certifications & Standards

CE
RoHS
LM80
IEC61347

pro up honeycomb

pro up honeycomb is a diffuser accessory that offers enhanced glare control and uniform light distribution

Ø 41mm	PUHSM41BNNONOTNONONOT
Ø 66mm	PUHSM66BNNONOTNONONOT
Ø 74mm	PUHSM74BNNONOTNONONOT
Ø 90mm	PUHSM90BNNONOTNONONOT
Ø 110mm	PUHSM11BNNONOTNONONOT

Body Color Black
Body Material Aluminum

pro up filter

pro up filter is a diffuser accessory that makes the light distribution softer


Ø 41mm	PUFSM41BNNONOTNONONOT
Ø 66mm	PUFSM66BNNONOTNONONOT
Ø 74mm	PUFSM74BNNONOTNONONOT
Ø 90mm	PUFSM90BNNONOTNONONOT
Ø 110mm	PUFSM11BNNONOTNONONOT

Body Color Transparent
Body Material Glass

Product Code

*Parameters not **interselectable**. Each dimension to be matched with corresponding output
**For RGBW variations only

P	D	U	IR	DM*	S	T	67	OUT*	CT	BM	CON
Family	Sub	Product	Mounting	Dimension	Body	Diffuser	IP	Output	CCT	Beam	Control
				13 130mm				540 540lm	27 2700K	15 15deg	DIG On-Off
				16 160mm				117 1170lm	30 3000K	24 24deg	TRI TRIAC
				18 180mm				180 1800lm	40 4000K	36 36deg	DIM 1-10V
				21 210mm				225 2250lm	60 6000K	60 60deg	DGX DIG On-Off
				25 250mm				315 3150lm	RW RGBW**		DMX Ready**
				13 130mm				120 120lm**			DAL DALI
				16 160mm				260 260lm**			
				18 180mm				400 400lm**			
				21 210mm				500 500lm**			
				25 250mm				700 700lm**			

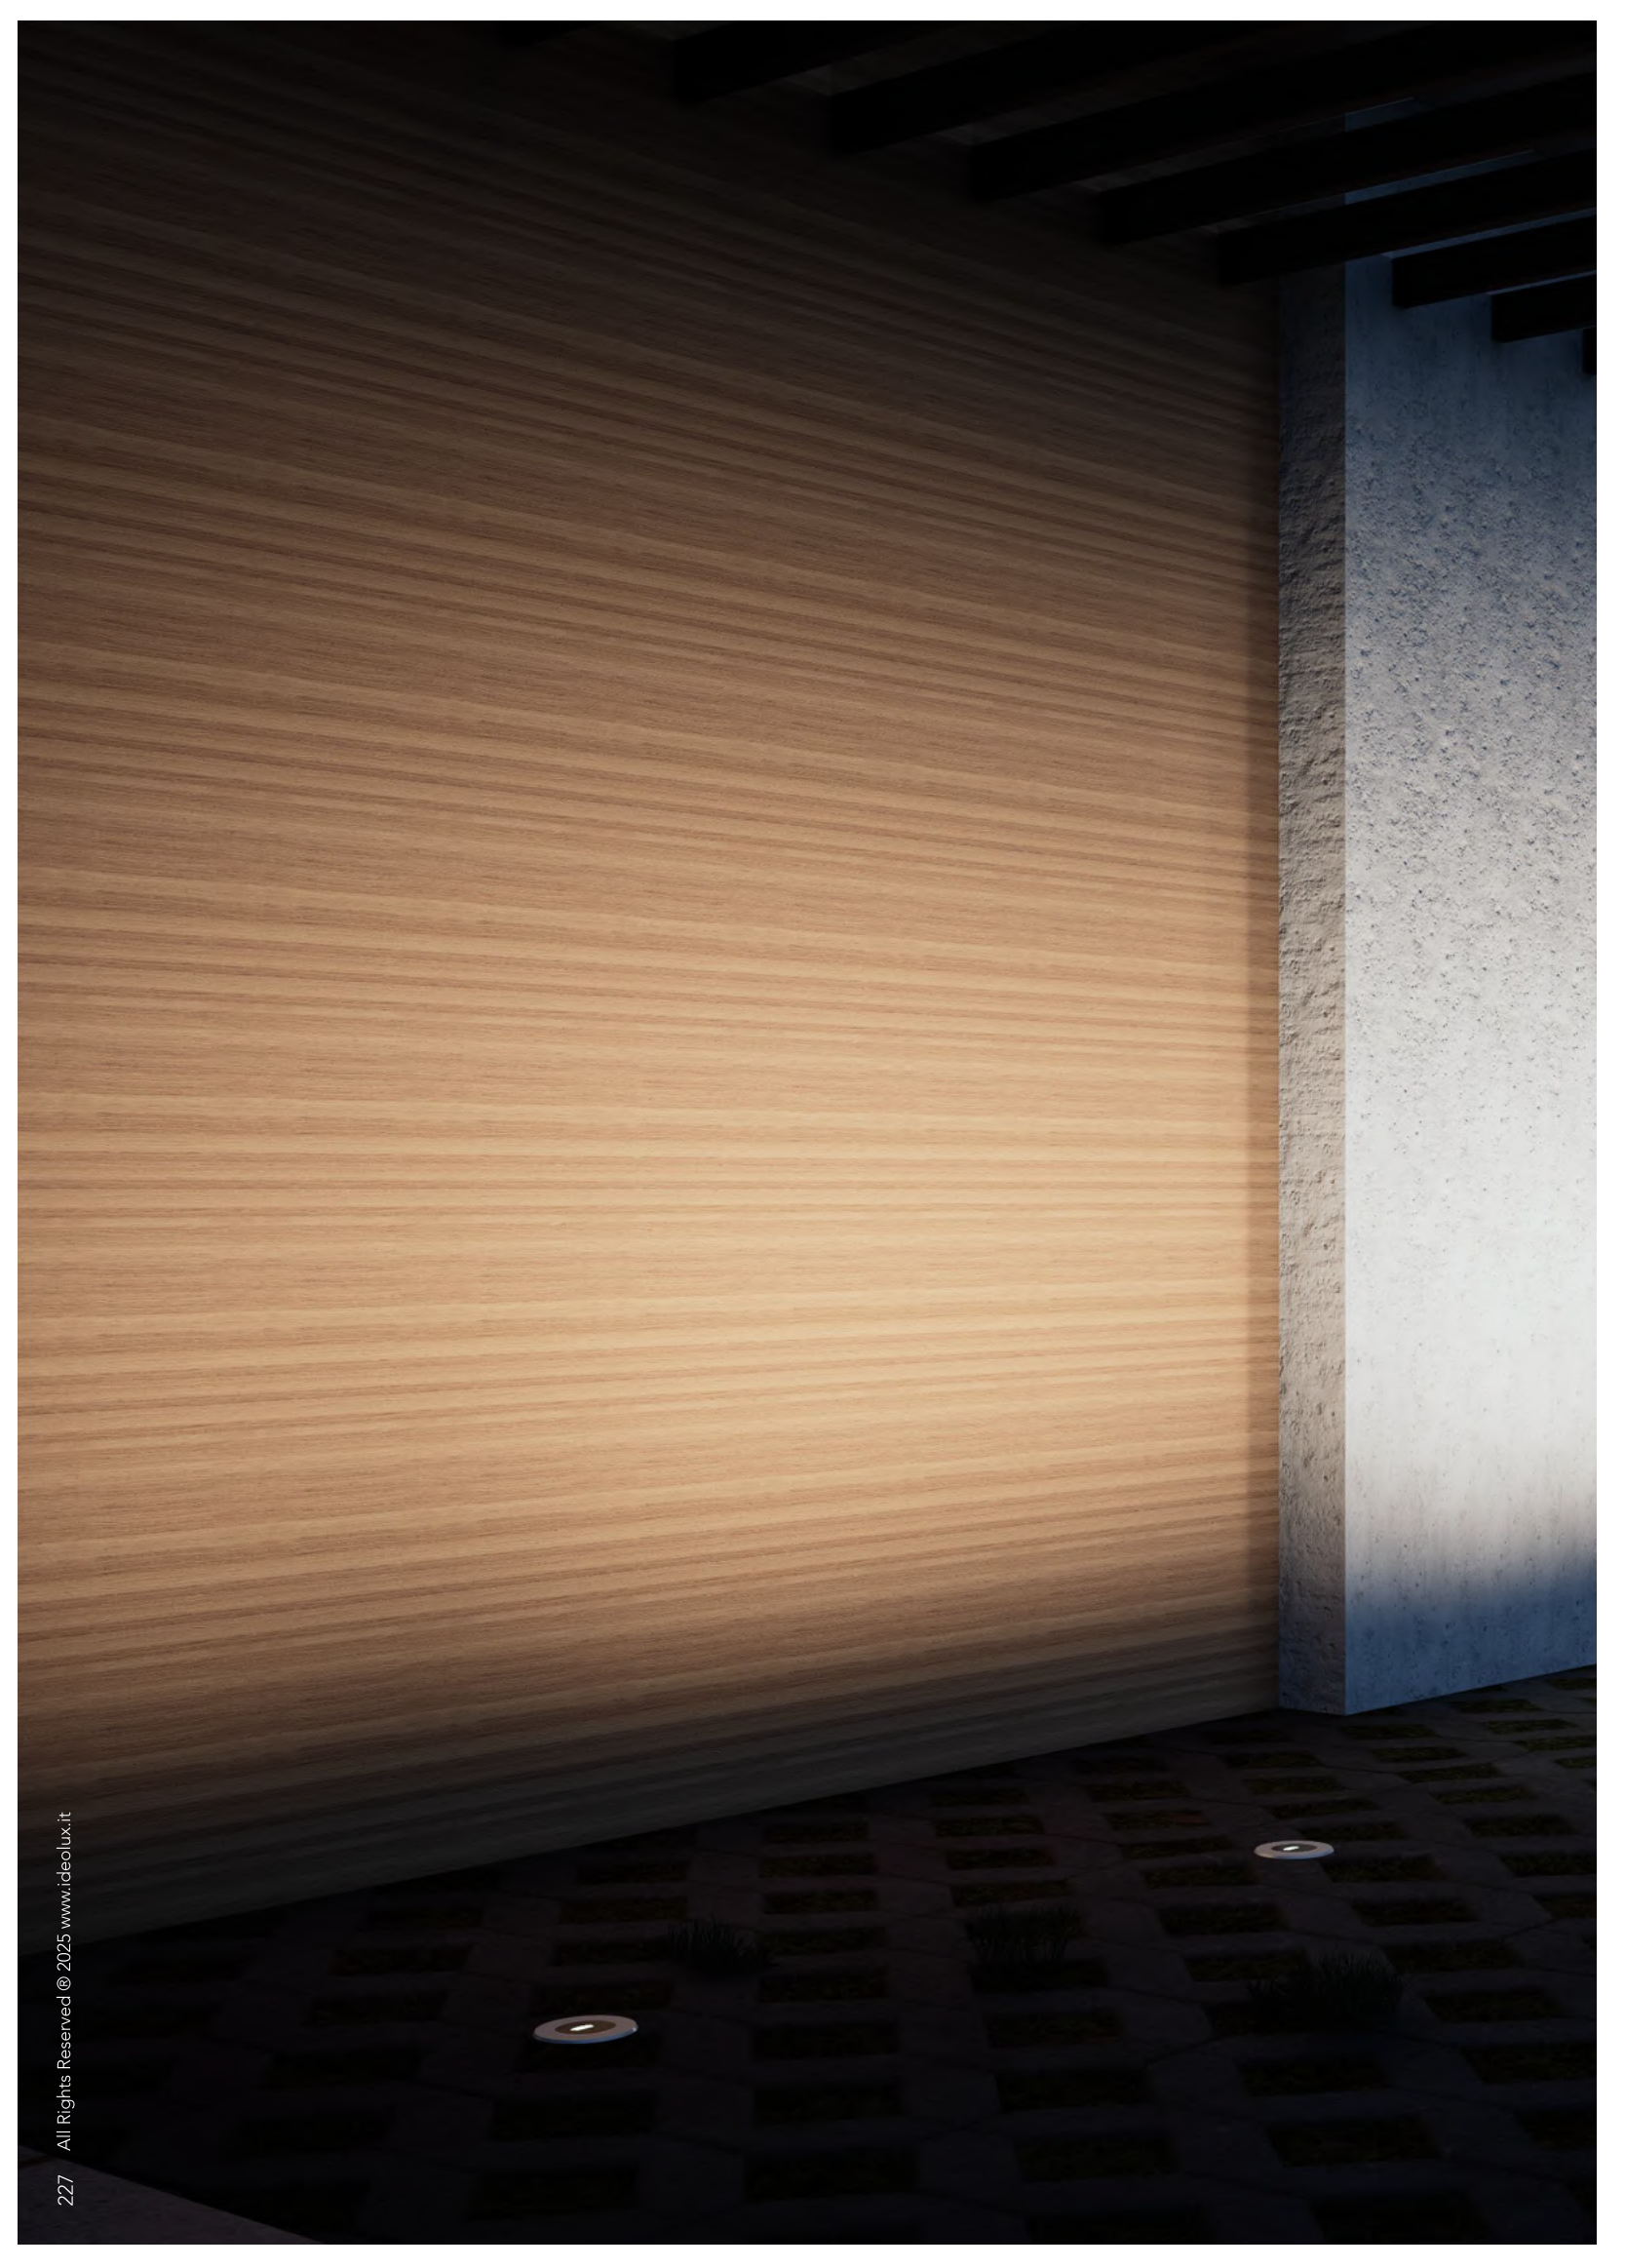




pro

asymmetric up



pro asymmetric up is a round inground recessed LED uplight renowned for its asymmetric beam feature, offering precise control over light direction and distribution. It is perfect for accentuating unique characteristics of patios, gardens, and walkways



side view



box view

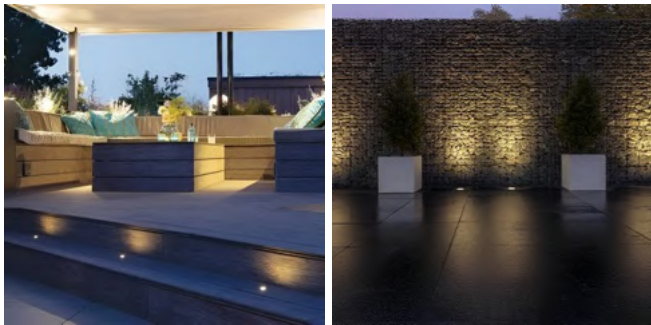

General Luminaire Data

Body Color



stainless steel

Diffuser Color



transparent

Body Material

Stainless Steel + Aluminum

Diffuser Material

Glass

Ingress Protection

67

Lifetime

50,000hrs

Photometry & Performance

Light Source

LED COB

Delivered Output

Single Color 540 | 1170 | 1800 | 2250 | 3150lm
RGBW 120 | 260 | 400 | 500 | 700lm


Luminaire Efficacy

90lm/W | RGBW 20lm/W


CRI

80

CCT



Beam Angle



Asymmetric Beam 27°

Electrical Characteristics

Voltage

220-240V

Frequency

50-60Hz

Power Factor

0.9

Protection

Class II

Wattage


6 | 13 | 20 | 25 | 35W

Control

DIG On-Off | TRIAC | DIM 1-10V |
DGX DIG On-Off DMX Ready | DALI

Accessories

Included	Control Gear
	Recessing Box
Sold Separately	Honeycomb
	Filter

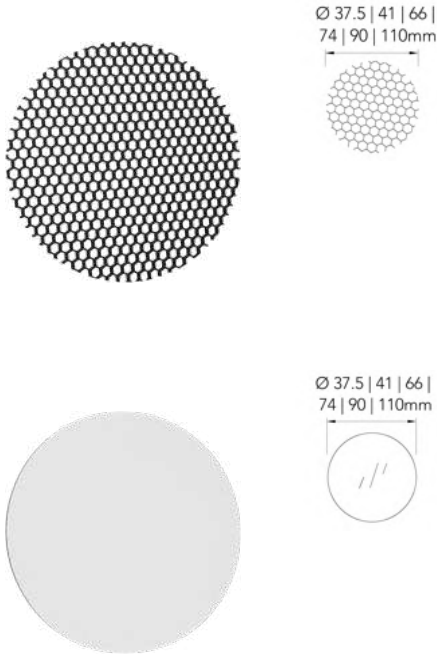

Certifications & Standards

CE
RoHS
LM80
IEC61347

pro up honeycomb

pro up honeycomb is a diffuser accessory that offers enhanced glare control and uniform light distribution

Ø 37.5mm	PUHSM37BNNONOTNONONOT
Ø 41mm	PUHSM41BNNONOTNONONOT
Ø 66mm	PUHSM66BNNONOTNONONOT
Ø 74mm	PUHSM74BNNONOTNONONOT
Ø 90mm	PUHSM90BNNONOTNONONOT
Ø 110mm	PUHSM11BNNONOTNONONOT

Body Color Black
Body Material Aluminum

pro up filter

pro up filter is a diffuser accessory that makes the light distribution softer

Ø 37.5mm	PUFSM37BNNONOTNONONOT
Ø 41mm	PUFSM41BNNONOTNONONOT
Ø 66mm	PUFSM66BNNONOTNONONOT
Ø 74mm	PUFSM74BNNONOTNONONOT
Ø 90mm	PUFSM90BNNONOTNONONOT
Ø 110mm	PUFSM11BNNONOTNONONOT

Body Color Transparent
Body Material Glass

Product Code

*Parameters not **interselectable**. Each dimension to be matched with corresponding output
**For RGBW variations only

P	A	U	IR	DM*	S	T	67	OUT*	CT	AB	CON
Family	Sub	Product	Mounting	Dimension	Body	Diffuser	IP	Output	CCT	Beam	Control
				13 130mm				540 540lm	27 2700K		DIG On-Off
				16 160mm				117 1170lm	30 3000K		TRI TRIAC
				18 180mm				180 1800lm	40 4000K		DIM 1-10V
				21 210mm				225 2250lm	60 6000K		DGX DIG On-Off
				25 250mm				315 3150lm	RW RGBW**		DMX Ready**
				13 130mm				120 120lm**			DAL DALI
				16 160mm				260 260lm**			
				18 180mm				400 400lm**			
				21 210mm				500 500lm**			
				25 250mm				700 700lm**			


pro

zoom up




pro zoom up is an inground recessed LED uplight, distinguished by its zoomable beam angles. Its ability to adjust the beam angle ensures that the flexibility to illuminate specific features or areas, providing both artistic expression and enhanced safety to outdoor spaces



side view



box view



General Luminaire Data

Body Color



stainless steel

Diffuser Color



transparent

Body Material

Stainless Steel + Aluminum

Diffuser Material

PMMA

Ingress Protection

67

Lifetime

50,000hrs

Electrical Characteristics

Voltage

24V

Wattage

8 | 15W

Control

Not Included

Photometry & Performance

Light Source

LED COB

Delivered Output

560 | 1050lm


Luminaire Efficacy

70lm/W


CRI

80


CCT




Beam Angle




Zoomable
15-50°



Zoomable
15-50°



Zoomable
20-40°



Zoomable
20-40°


Accessories		Certifications & Standards
Included	Mounting Box	CE
Sold Separately	Control Gear	RoHS
		LM80
		IEC61347

Product Code										*Parameters not interselectable . Each dimension to be matched with corresponding output	
P	Z	U	IR	DM*	S	T	67	OUT*	CT	BM*	NOT
Family	Sub	Product	Mounting	Dimension	Body	Diffuser	IP	Output	CCT	Beam	Control
				80 80mm				560 560lm	27 2700K	ZB 15-50	
				10 100mm				105 1050lm	30 3000K	deg	
									40 4000K	ZB 20-40	
									60 6000K	deg	

pro

mini up

pro mini up is a minimal LED up light available in transparent, and frosted diffuser styles. It has a robust aluminum body, full glass diffuser, and minimal design, perfect for applications such as pathways, and general landscapes

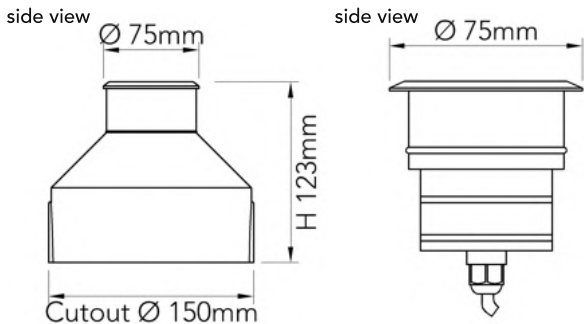


General Luminaire Data

Body Color	 stainless steel
Diffuser Color	 transparent frosted
Body Material	Stainless Steel + Aluminum
Diffuser Material	Glass
Ingress Protection	67
Lifetime	50,000hrs

Electrical Characteristics

Voltage	24V
Wattage	4 6W
Control	Not Included

Photometry & Performance

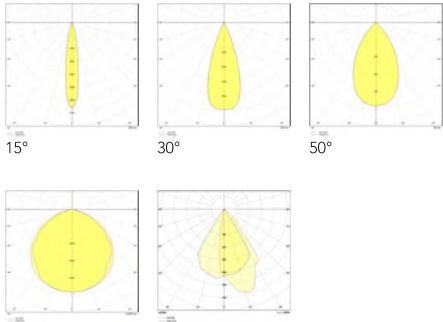Light Source	LED SMD
Delivered Output	240 360lm
Luminaire Efficacy	60lm/W
CRI	80
CCT	 2700K 3000K 4000K 5700K
Beam Angle	 15° 30° 50° 120° Asymmetric 30 x 45°

Accessories		Certifications & Standards
Included	Recessing Box	CE
Sold Separately	Control Gear	RoHS
		LM80
		IEC61347

Product Code						*Parameters not interselectable . Each dimension to be matched with corresponding output					
P	M	U	IR	75	S	D*	67	OUT*	CT	BM*	NOT
Family	Sub	Product	Mounting	Dimension	Body	Diffuser	IP	Output	CCT	Beam	Control
						T Transparent		360 360lm	27 2700K	15 15deg	
						T Transparent		360 360lm	30 3000K	30 30deg	
						T Transparent		360 360lm	40 4000K	50 50deg	
						T Transparent		360 360lm		AB 30*45	
						F Frosted		240 240lm		12 120deg	







pro

micro up

pro micro up is a minimal LED uplight. With its wide variety of optics, robust stainless steel build, and minimal design, it is perfect for applications such as pool decks, façades, passageways, steps, and general landscapes




side view

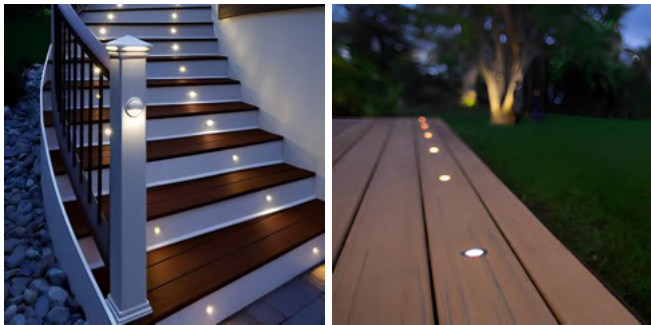

General Luminaire Data

Body Color	 stainless steel
Diffuser Color	 transparent frosted
Body Material	Stainless Steel
Diffuser Material	Tempered Glass
Ingress Protection	67
Lifetime	50,000hrs


Photometry & Performance

Light Source	LED COB
Delivered Output	Single Color 505 909lm RGB 168 252lm RGBW 224 280lm
Luminaire Efficacy	101lm/W RGB 28lm/W RGBW 28lm/W
CRI	80
CCT	 2700K 3000K 4000K 6000K RGB RGBW

Electrical Characteristics


Voltage	12V 24V
Wattage	Single Color 5 9W RGB 6 9W RGBW 8 10W
Control	Not Included NMX DMX Ready

Beam Angle

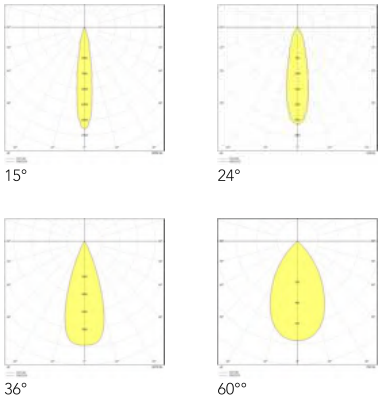

Accessories

- Sold Separately
- Control Gear
- Honeycomb Louvre



Certifications & Standards

- CE
- RoHS
- LM80
- IEC61347

pro up honeycomb

pro up honeycomb is a honeycomb accessory design to used for optimal glare control

- Ø 37.5mm PUHSM37BNNONOTNONONOT
- Ø 48.5mm PUHSM48BNNONOTNONONOT

- Body Color


Black
- Body Material Aluminum

Product Code											*Parameters not interselectable . Each dimension to be matched with corresponding output	
P	M	U	IR	DM	S	D	67	OUT	CT	BM	CON	
Family	Sub	Product	Mounting	Dimension	Body	Diffuser	IP	Output	CCT	Beam	Control	
				70 70mm		T Transparent		505 505lm	27 2700K	15 15deg	NOT Included	
				80 80mm		F Frosted		909 909lm	30 3000K	24 24deg	NMX DMX	
				70 70mm				168 168lm**	40 4000K	36 36deg	Ready**	
				80 80mm				252 252lm**	60 6000K	60 60deg	NMX DMX	
				70 70mm				224 224lm***	RG RGB**		Ready***	
				80 80mm				280 280lm***	RW RGBW***			

pro

nano up

pro nano up is a minimal LED uplight. With its wide variety of optics, robust stainless steel build, and minimal design, it is perfect for applications such as pool decks, façades, passageways, steps, and general landscapes



General Luminaire Data


Body Color	 stainless steel
Diffuser Color	 transparent frosted
Body Material	Stainless Steel
Diffuser Material	Tempered Glass
Ingress Protection	67
Lifetime	50,000hrs

Electrical Characteristics


Voltage	12V 24V
Wattage	Single Color 2W RGB 3W RGBW 4W
Control	Not Included NMX DMX Ready

Photometry & Performance

Light Source	LED SMD
Delivered Output	Single Color 120lm RGB 48lm RGBW 60lm
Luminaire Efficacy	60lm/W RGB 16lm/W RGBW 15lm/W
CRI	80
CCT	




Beam Angle

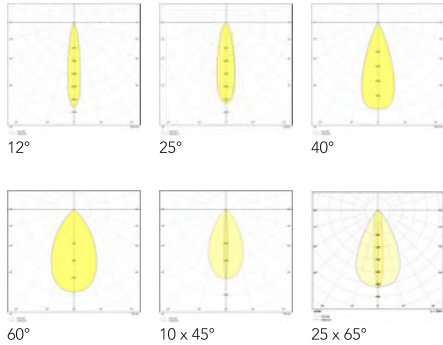

Accessories

- Sold Separately
- Control Gear
- Honeycomb Louvre



Certifications & Standards

CE
RoHS
LM80
IEC61347

pro up honeycomb

pro up honeycomb is a honeycomb accessory design to used for optimal glare control

Ø 28.5mm PUHSM28BNNONOTNONONOT

Body Color

Black

Body Material Aluminum

Product Code

P	N	U	IR	DM	S
Family	Sub	Product	Mounting	Dimension	Body
				50 50mm	
				82 82mm	

D	67	OUT	CT	BM	CON					
Diffuser	IP	Output	CCT	Beam	Control					
T Transparent		120 120lm	27 2700K	08 08deg	NOT Included					
F Frosted		048 048lm*	30 3000K	12 12deg	NMX DMX					
		060 060lm**	40 4000K	25 25deg	Ready*					
			60 6000K	40 40deg	NMX DMX					
			RG RGB*	60 60deg	Ready**					
			RW RGBW**	10 10 x 45						
				25 25 x 60						

*For RGB variations only

**For RGBW variations only


pro

pico up

pro pico up is the smallest LED uplight. With its robust stainless steel build and very minimal design, it is perfect for applications such as pool decks, façades, passageways, steps, and general landscapes



side view



General Luminaire Data

Body Color	 stainless steel
Diffuser Color	 opal
Body Material	Stainless Steel
Diffuser Material	Tempered Glass
Ingress Protection	67
Lifetime	50,000hrs

Electrical Characteristics


Voltage	12V 24V
Wattage	0.3 0.5 1W
Control	Not Included

Photometry & Performance

*available upon request

Light Source	LED SMD
Delivered Output	019 033 066lm
Luminaire Efficacy	66lm/W
CRI	80
CCT	 2700K  3000K  4000K  6000K  Single Color *

Beam Angle



Accessories		Certifications & Standards
Sold Separately	Control Gear	CE RoHS LM80 IEC61347

Product Code					*Parameters not interselectable . Each dimension to be matched with corresponding output						
P	P	U	IR	DM*	S	O	67	OUT*	CT	12	NO
Family	Sub	Product	Mounting	Dimension	Body	Diffuser	IP	Output	CCT	Beam	Control
				10 10mm				019 019lm	27 2700K		
				20 20mm				033 033lm	30 3000K		
				30 30mm				066 066lm	40 4000K		
									60 6000K		

pro




linear up

pro linear up has a highly aesthetic appeal for its minimal linear shape. It is available in various color temperatures and lumen outputs suitable for any wall grazing, washing, and walkway lighting



front view

side view

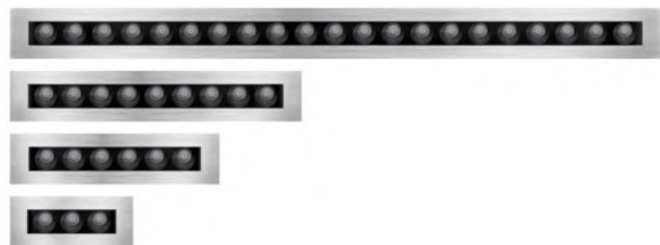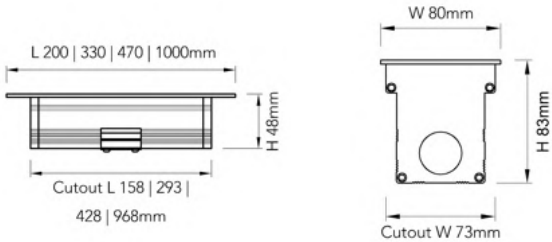

General Luminaire Data

Body Color	 stainless steel
Diffuser Color	 transparent frosted
Body Material	Stainless Steel
Diffuser Material	PMMA
Ingress Protection	67
Lifetime	50,000hrs

Electrical Characteristics


Voltage	24V
Wattage	7 14 21 49W
Control	Not Included NMX DMX Ready

Photometry & Performance

Light Source	LED SMD
Delivered Output	Single Color 400 800 1200 2800lm RGBW 161 322 488 1127lm
Luminaire Efficacy	57lm/W RGBW 23lm/W
CRI	80
CCT	 2700K
	 3000K
	 4000K
	 6000K
	 RGBW

Beam Angle

*anti-glare reflector comes in Asymmetric 50 x 40deg beam angle

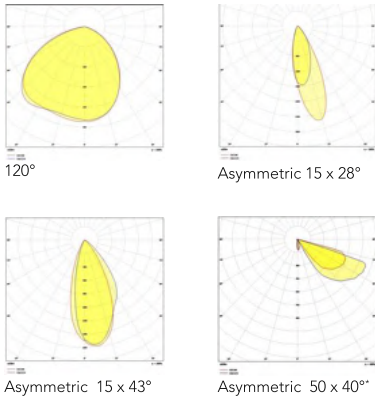

Accessories

Inlcuded	Recessing Box
Sold Separately	Control Gear

Certifications & Standards

CE
RoHS
LM80
IEC61347

Product Code

* Parameters not **interselectable**. Each dimension to be matched with corresponding output
**For RGBW variations only

P	L	U	IR	DM*	S	D*	67	OUT*	CT	BM*	CON
Family	Sub	Product	Mounting	Dimension	Body	Diffuser	IP	Output	CCT	Beam	Control
				20 200mm		F Frosted		400 400lm	27 2700K	120 120deg	NOT Included
				33 330mm		T Transparent		800 800lm	30 3000K	AB 15*28	NMX DMX
				47 470mm		T Transparent		120 1200lm	40 4000K	AB 15*43	Ready**
				10 1000mm		T Transparent		280 2800lm	60 6000K	AB 50*40	
				20 200mm				161 161lm***	RW RGBW***		
				33 330mm				322 322lm***			
				47 470mm				488 488lm***			
				10 1000mm				112 1127lm***			

pro


linear ice

pro linear ice features a sleek linear design, offering two versatile mounting options perfect for walkway lighting. Its unique diffused beam angle effect guarantees even light distribution, casting a gentle, welcoming radiance, making it ideal for diverse outdoor lighting needs



front view

side view

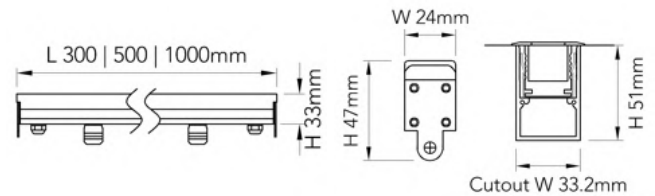

General Luminaire Data

Body Color	 aluminum
Diffuser Color	 frosted
Body Material	Aluminum
Diffuser Material	PMMA
Ingress Protection	67
Lifetime	50,000hrs


Electrical Characteristics

Voltage	24V
Wattage	5 8.5 18W
Control	Not Included

Photometry & Performance

Light Source	LED SMD
Delivered Output	350 595 1260lm
Luminaire Efficacy	70lm/W
CRI	80
CCT	 2700K  3000K  4000K  6000K

Beam Angle



Accessories		Certifications & Standards
Included	Inground Recessed Mounting Box	CE
Sold Separately	Control Gear	RoHS
		LM80
		IEC61347

Product Code *Parameters not **interselectable**. Each dimension to be matched with corresponding output

P	L	I	IR	DM*	A	F	67	OUT*	CT	20	NOT
Family	Sub	Product	Mounting	Dimension	Body	Diffuser	IP	Output	CCT	Beam	Control
				30 300mm				350 350lm	27 2700K		
				50 500mm				595 595lm	30 3000K		
				10 1000mm				126 1260lm	40 4000K		
									60 6000K		





pro





round over

pro round over is a side emitting, floor mounted LED light ideal for driveways and walkways. It is a versatile option that comes with multiple color temperatures and can emit light from one, two, three, or four sides



side view

box view



General Luminaire Data

Body Color



stainless steel

Diffuser Color



transparent

Body Material

Stainless Steel + Aluminum

Diffuser Material

PMMA

Ingress Protection

67

Lifetime

50,000hrs

Electrical Characteristics

Voltage

24V

Wattage

3W

Control

Not Included

Photometry & Performance

Light Source

LED SMD

Delivered Output

135lm

Luminaire Efficacy

45lm/W


CRI

80


CCT




Beam Angle




34°



2*34°



3*34°



4*34°

Accessories			Certifications & Standards		
Included	Recessing Box		CE		
Sold Separately	Control Gear		RoHS		
			LM80		
			IEC61347		

Product Code											
P	R	O	IR	60	S	T	67	135	CT	BM	NOT
Family	Sub	Product	Mounting	Dimension	Body	Diffuser	IP	Output	CCT	Beam	Control
									27 2700K	34 34deg	
									30 3000K	02 02*34	
									40 4000K	03 03*34	
									60 6000K	04 04*34	



trimless recessed ingrounds

our exceptional range of trimless recessed inground lighting is meticulously crafted to enhance outdoor spaces with lasting elegance and cutting-edge functionality

beyond their captivating design, these luminaires offer gentle yet abundant illumination that enhances landscapes and pathways. This ensures not only improved aesthetics but also heightened safety and security in outdoor environments



durable body
material




diverse beam
angles



safe to walk over




IP rating



wide range of
wattages




functional
lighting

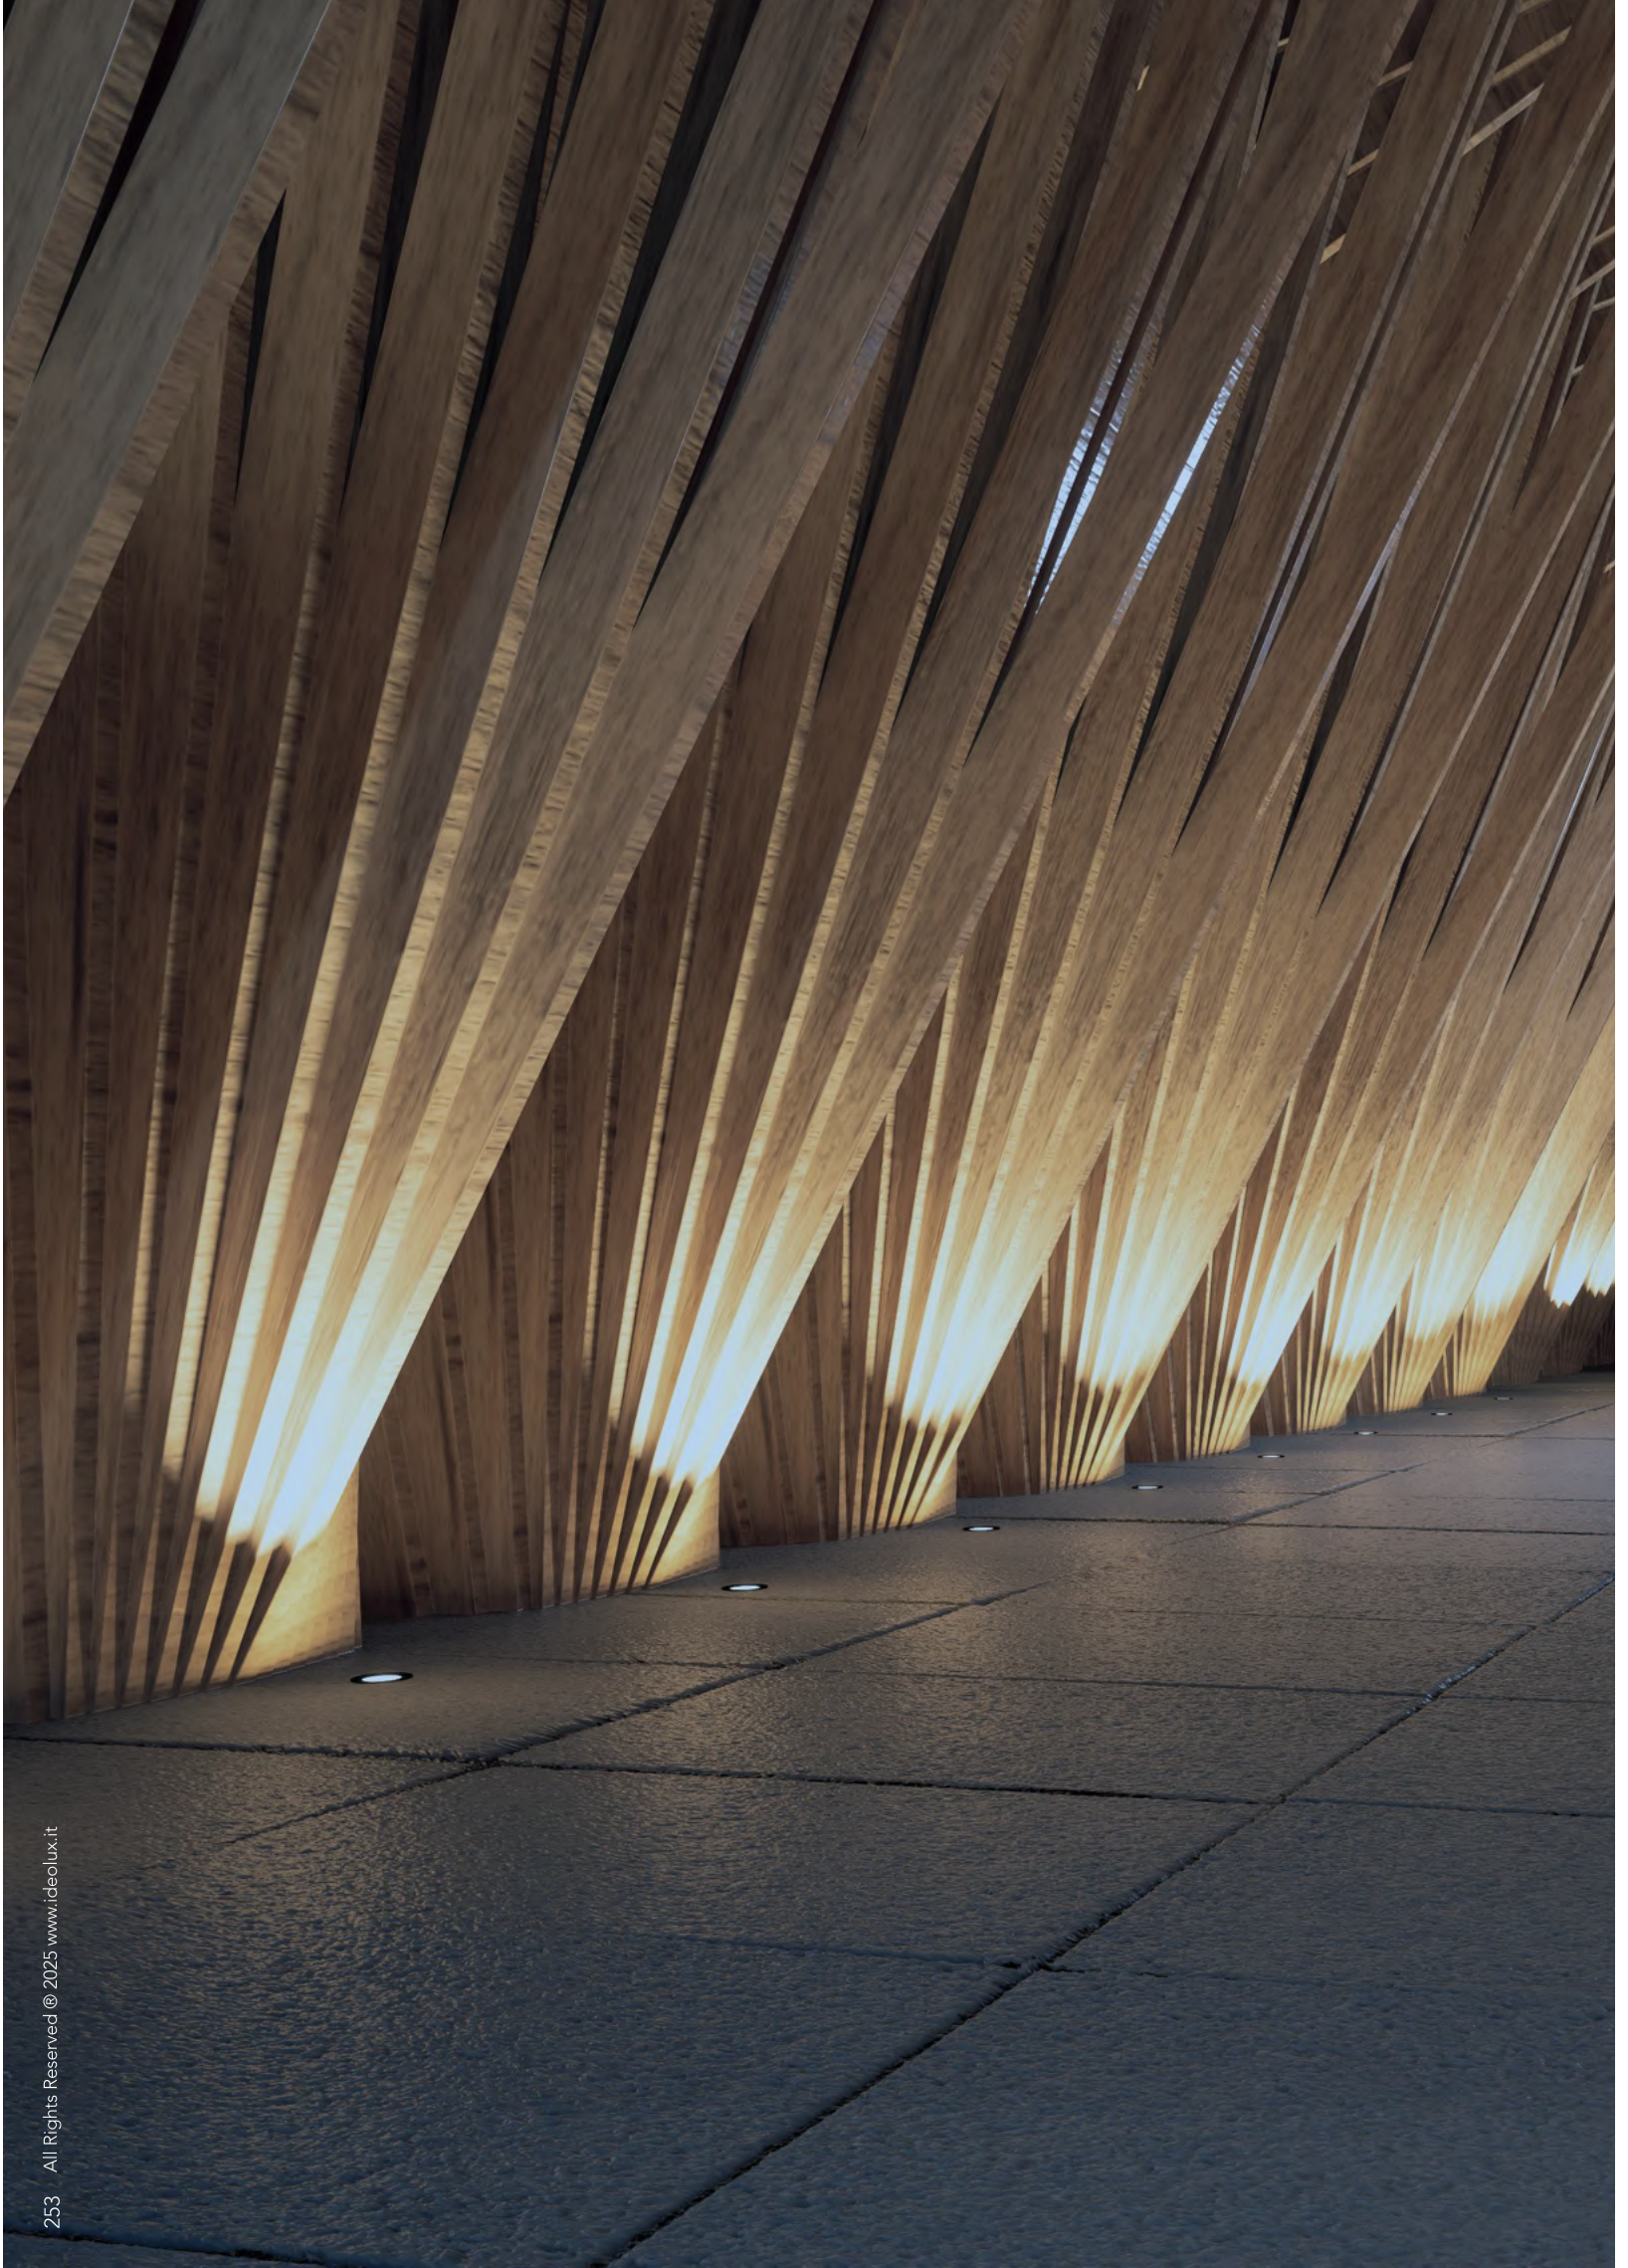

pro

round trimless

pro round trimless is a trimless uplight which features printable glass along with its highly aesthetic appeal for minimal round shape. It is available in various color temperatures suitable for wall grazing, washing, and walkway lighting

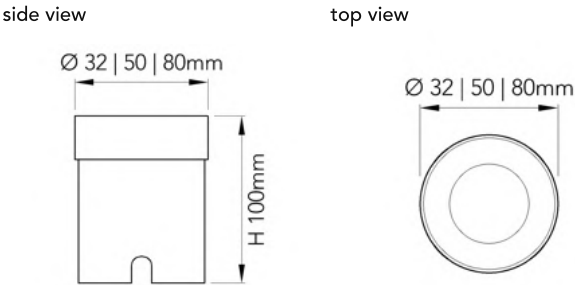

General Luminaire Data

Body Color	silver black sandy matt white sandy matt grey
Diffuser Color	transparent frosted
Body Material	Stainless Steel + Aluminum
Diffuser Material	Tempered Glass
Ingress Protection	67
Lifetime	50,000hrs


Electrical Characteristics

Voltage	24V
Wattage	1.5 3 8W
Control	Not Included NAL DALI Ready

Photometry & Performance

*available upon request	
Light Source	LED COB
Delivered Output	117 234 624lm
Luminaire Efficacy	78lm/W
CRI	80
CCT	2700K 3000K 4000K RGBW *

Beam Angle

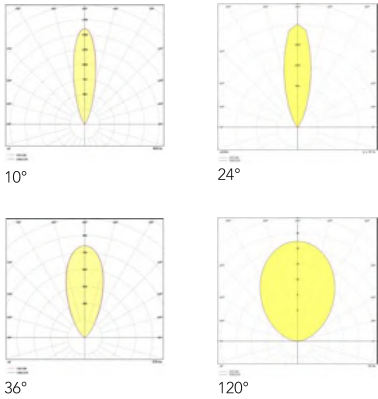


Accessories

Included	Mounting Sleeve
Sold Separately	Control Gear
	Honeycomb Louvre

Certifications & Standards

CE
RoHS
LM80
IEC61347

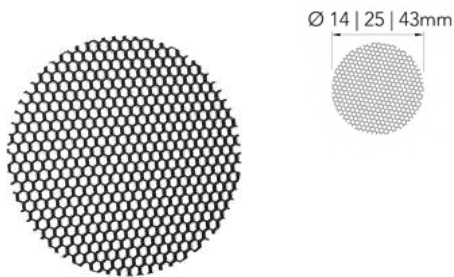

pro trimless honeycomb

pro trimless honeycomb is a diffuser accessory that offers enhanced glare control and uniform light distribution

- Ø 14mm PTHSM14BNNONOTNONONOT
- Ø 25mm PTHSM25BNNONOTNONONOT
- Ø 43mm PTHSM43BNNONOTNONONOT

Body Color ■ Black
Body Material Aluminum

Product Code

*Parameters not **interselectable**. Each dimension to be matched with corresponding output

P	R	T	IR	DM*	B	D	67	OUT*	CT	BM	CON
Family	Sub	Product	Mounting	Dimension	Body	Diffuser	IP	Output	CCT	Beam	Control
				32 32mm	S Silver	T Transparent		117 117lm	27 2700K	10 10deg	NOT Included
				50 50mm	B Black Sandy	F Frosted		234 234lm	30 3000K	24 24deg	NAL DALI
				80 80mm	Matt			624 624lm	40 4000K	36 36deg	Ready
					W White Sandy					12 120deg	
					Matt						
					G Grey						


pro

square trimless

pro square trimless is a trimless square inground recessed LED uplight designed with anti glare optics for visual comfort. It is an essential element in highlighting special features of patios, garden, and walkways



side view



General Luminaire Data

Body Color	 stainless steel
Diffuser Color	 transparent
Body Material	Stainless Steel
Diffuser Material	Glass
Ingress Protection	67
Lifetime	50,000hrs


Electrical Characteristics

Voltage	24V
Wattage	6W
Control	Not Included

Photometry & Performance

Light Source	LED SMD
Delivered Output	510lm
Luminaire Efficacy	85lm/W
CRI	80
CCT	 2700K 3000K 4000K 5700K

Beam Angle



Accessories		Certifications & Standards
Sold Separately	Control Gear	CE RoHS LM80 IEC61347

Product Code											
P	S	T	IR	10	S	T	67	510	CT	30	NOT
Family	Sub	Product	Mounting	Dimension	Body	Diffuser	IP	Output	CCT	Beam	Control
									27 2700K		
									30 3000K		
									40 4000K		
									57 5700K		

pro



linear trimless

pro linear trimless has a highly aesthetic appeal for its trimless, minimal shape. It is available in various color temperatures and lumen outputs, making it suitable for pathways, and general landscapes



side view
*length can be customized upon request

side view

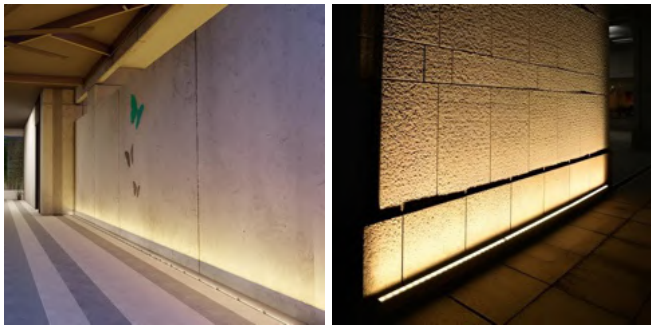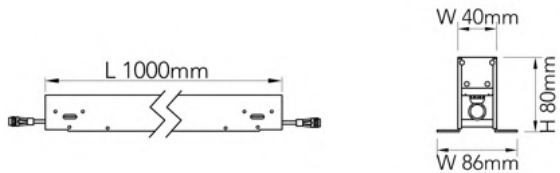

General Luminaire Data

Body Color	 stainless steel
Diffuser Color	 transparent
Body Material	Aluminum
Diffuser Material	Tempered Glass
Ingress Protection	67
Lifetime	50,000hrs


Electrical Characteristics

Voltage	220-240V 24V
Frequency	50-60Hz Not Applicable
Power Factor	0.9 Not Applicable
Protection	Class II Not Applicable
Wattage	Single Color 25 36W RGB 17.28W RGBW 23W
Control	Dig On-Off DIM 0-10V NMX DMX Ready DALI

Photometry & Performance

Light Source	LED SMD
Delivered Output	Single Color 1550 2232lm RGB 380lm RGBW 506lm
Luminaire Efficacy	62lm/W RGB 22lm/W RGBW 22lm/W
CRI	90
CCT	 2700K  3000K  4000K  6500K  RGB  RGBW

Beam Angle

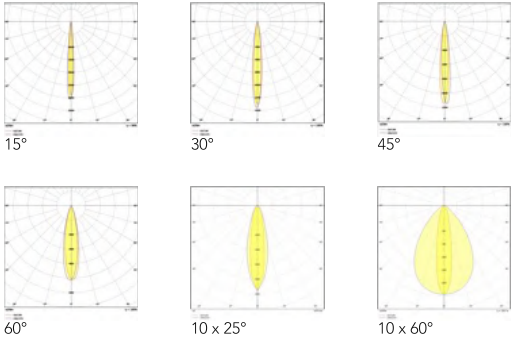

Accessories


Included	Recessing Box
	Control Gear

Certifications & Standards

CE
RoHS
LM80
IEC61347

Product Code

P	L	T	IR	10	S	T	67	OUT	CT	BM	CON
Family	Sub	Product	Mounting	Dimension	Body	Diffuser	IP	Output	CCT	Beam	Control
								155 1550lm	27 2700K	10 10deg	DIG On-Off
								223 2232lm	30 3000K	15 15deg	DIM 0-10V
								380 380lm*	40 4000K	30 30deg	NMX DMX
								506 506lm**	65 6500K	45 45deg	Ready*
								RG RGB*	60 60deg	NMX DMX	
								RW RGBW**	10 10x25	Ready**	
										10 10x60	DAL DALI

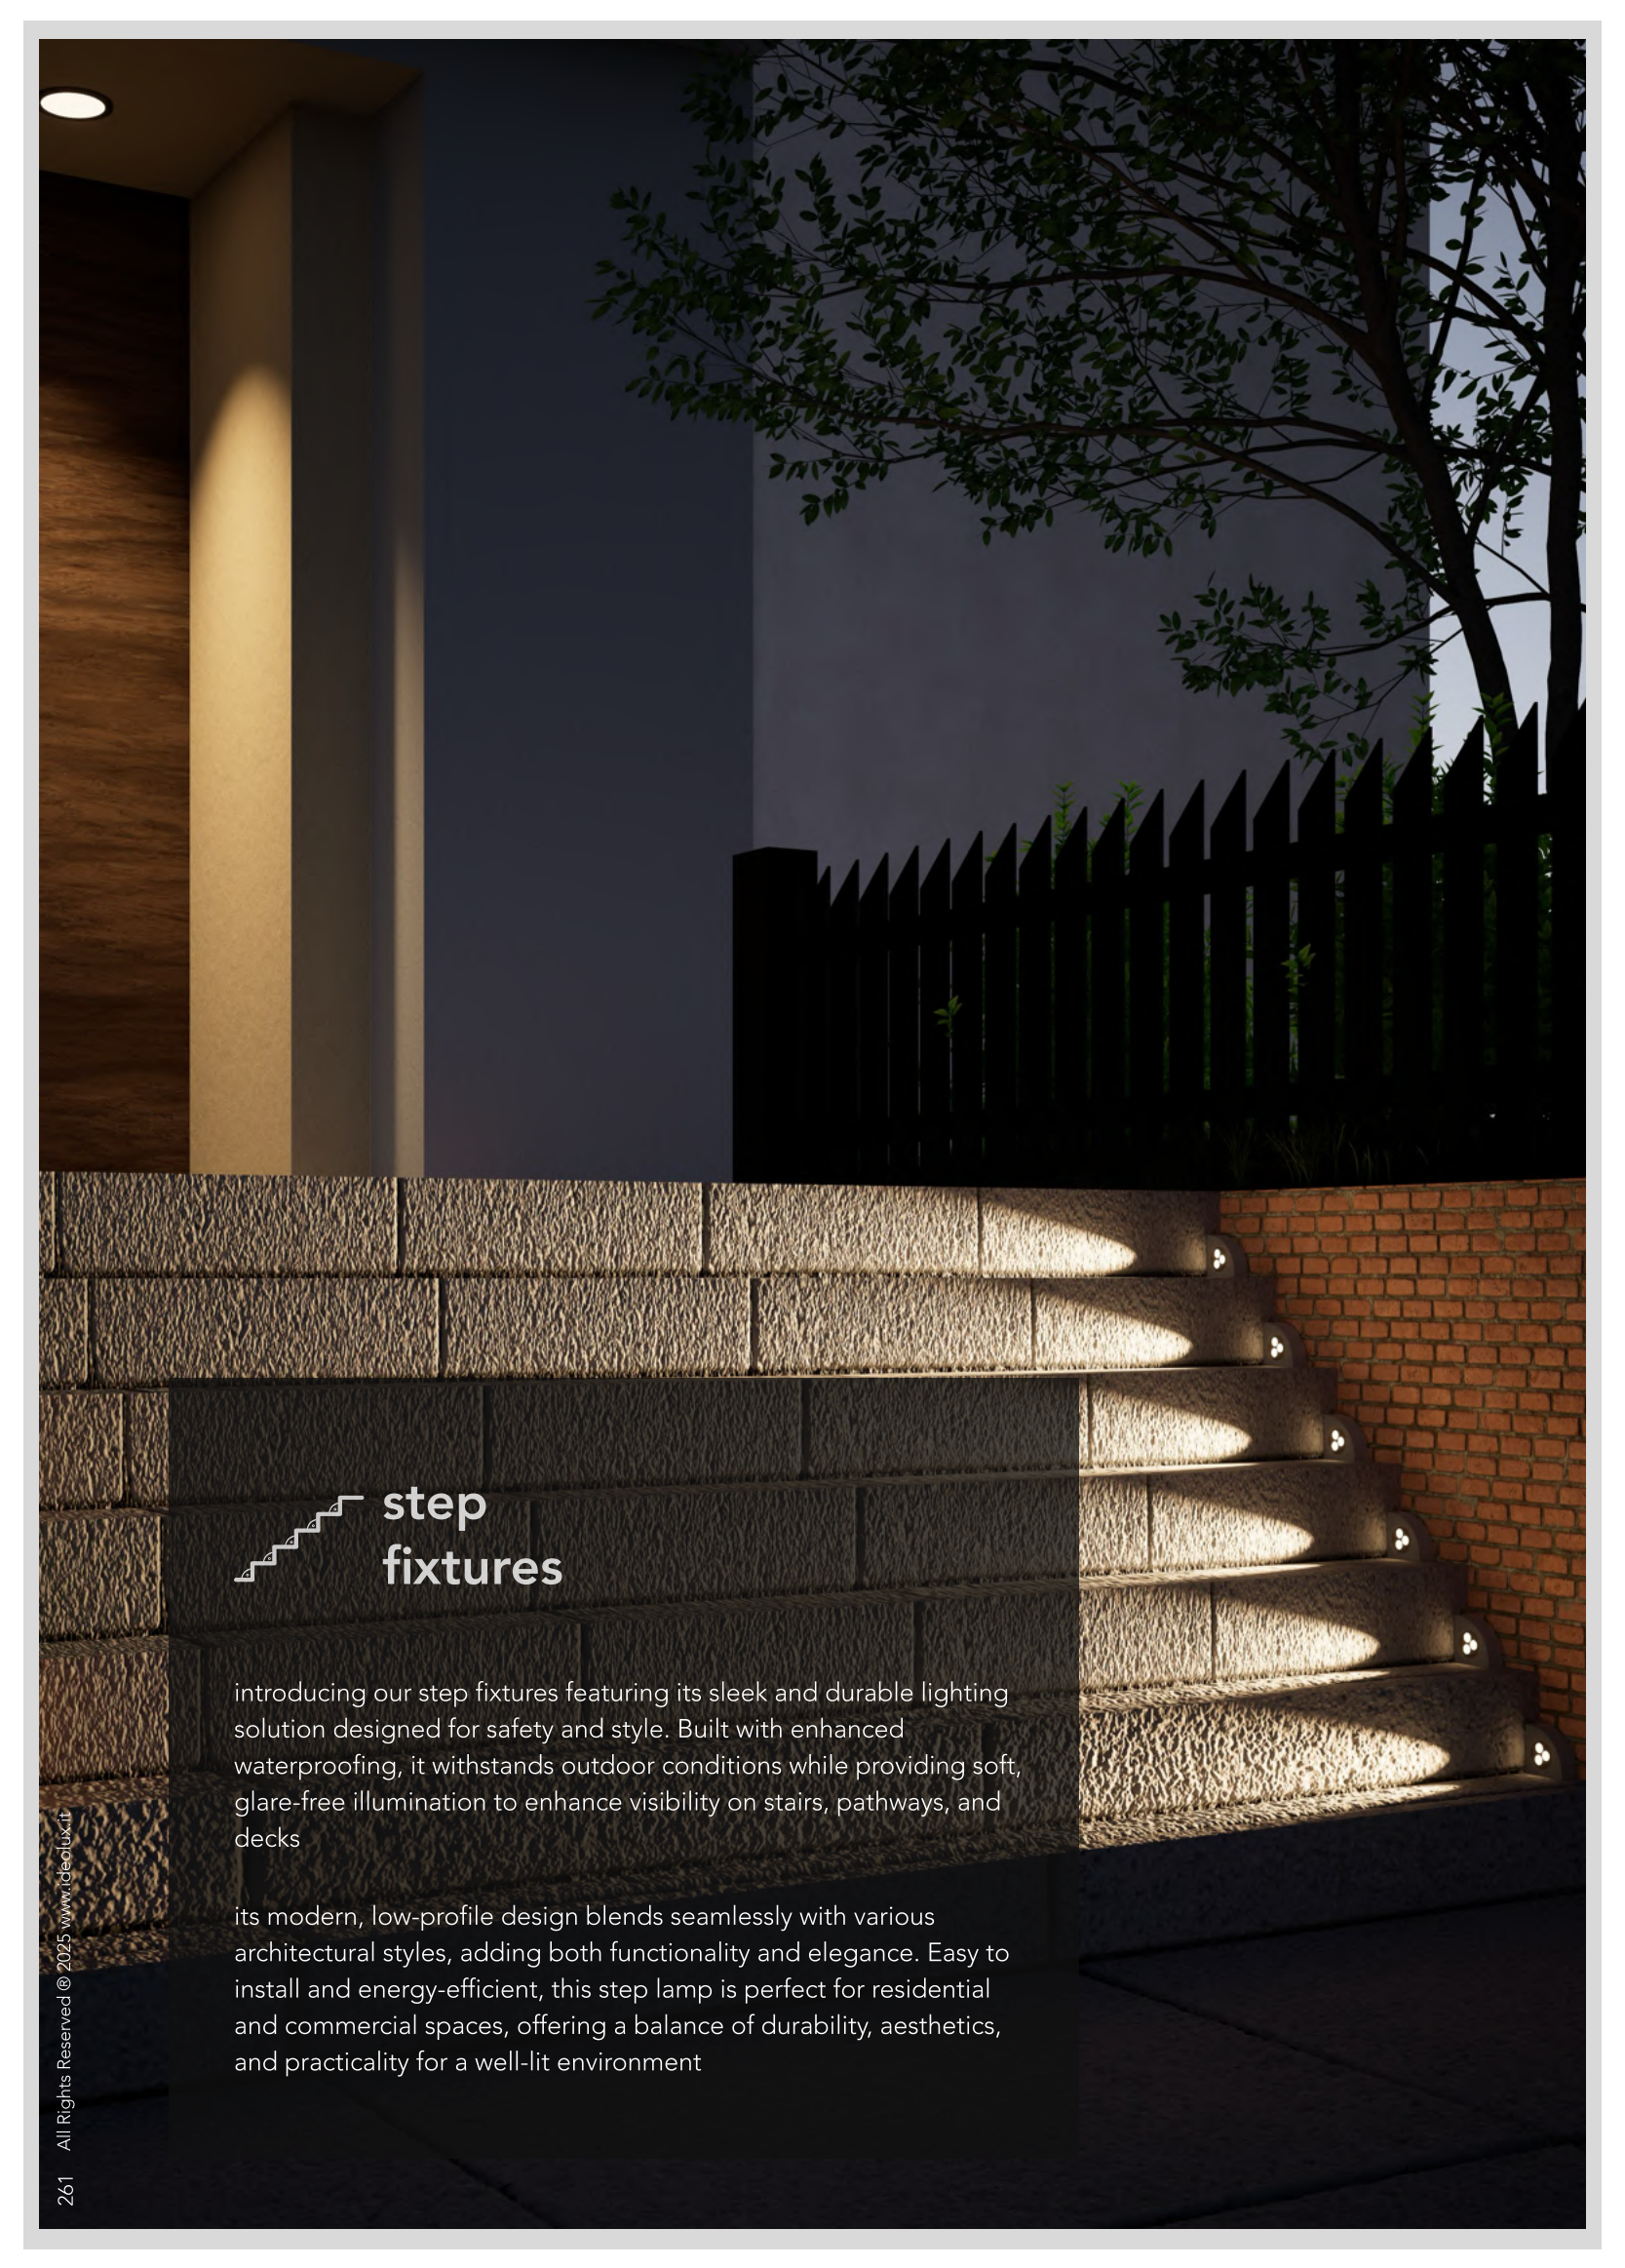


step fixtures

introducing our step fixtures featuring its sleek and durable lighting solution designed for safety and style. Built with enhanced waterproofing, it withstands outdoor conditions while providing soft, glare-free illumination to enhance visibility on stairs, pathways, and decks

its modern, low-profile design blends seamlessly with various architectural styles, adding both functionality and elegance. Easy to install and energy-efficient, this step lamp is perfect for residential and commercial spaces, offering a balance of durability, aesthetics, and practicality for a well-lit environment



multiple color
finish



multiple beams



multiple CCTs



durable body
material



High CRI

color rendering
index



pathway lighting



pro

step curve

pro step curve is a step lamp light that features its compact and simple design is easy to install, making it perfect for various installation scenes. It features a wide voltage input with a precise electronic scheme for efficient energy use



surface mounted



architectural outdoor



residential




commercial






landscape



top view



side view



General Luminaire Data

*available upon request

Body Color



grey



any other RAL colors *

Diffuser Color



transparent

Body Material

Aluminum

Diffuser Material

Tempered Glass

Ingress Protection

66

Lifetime

50,000hrs

Electrical Characteristics

*For RGBW variations only

Voltage

220-240V | 24V

Frequency

50-60Hz | Not Applicable

Power Factor

0.9 | Not Applicable

Protection

Class II | Not Applicable

Wattage

3 | 4 *W

Control

DIG On-Off | DIM 0-10V | NMX DMX Ready | DALI

Photometry & Performance

Light Source

LED SMD

Delivered Output

Single Color 180lm

RGB 60lm

RGBW 80lm

Tunable White 60lm

Luminaire Efficacy

60lm/W | RGB 20lm/W | RGBW 20lm/W |

TW 20lm/W

CRI

90

CCT

2700K

3000K

4000K

5000K

5700K

6000K

6500K


RGB

RGBW


TW

1800-6500K


Beam Angle




08°




10°




13°



20°




40°



45°

Accessories

Included	Control Gear
Sold Separately	Honeycomb Louvre

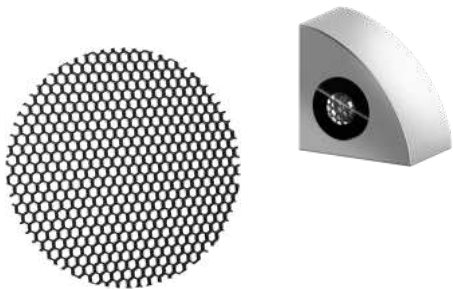

Certifications & Standards

CE
RoHS
LM80
IEC61347

pro step honeycomb

pro step honeycomb is a diffuser accessory that offers enhanced glare control and uniform light distribution

PSHSMNOBNNONOTNONONOT
*honeycomb available on request

Body Color Black
Body Material Aluminum

Product Code					*For RGB variations only	**For RGBW variations only	***For Tunable White variations only				
P	S	C	SM	79	G	T	66	OUT	CT	BM	CON
Family	Sub	Product	Mounting	Dimension	Body	Diffuser	IP	Output	CCT	Beam	Control
								180 180lm	27 2700K	08 08deg	DIG On-Off
								060 060lm*	30 3000K	10 10deg	DAL DALI
								080 080lm**	40 4000K	13 13deg	DIM 0-10V
								060 060lm***	50 5000K	20 20deg	NMX DMX
									57 5700K	40 40deg	Ready*
									60 6000K	45 45deg	NMX DMX
									65 6500K		Ready**
									RG RGB*		
									RW RGBW**		
									TU Tunable		
									1800-6500K***		


pro

step curve


pro step curve is a step lamp light that features its compact and simple design is easy to install, making it perfect for various installation scenes. It features a wide voltage input with a precise electronic scheme for efficient energy use



top view



side view



General Luminaire Data

*available upon request

Body Color



Diffuser Color



Body Material Aluminum
Diffuser Material Tempered Glass
Ingress Protection 66
Lifetime 50,000hrs

Electrical Characteristics


*For RGBW variations only

Voltage 220-240V | 24V
Frequency 50-60Hz | Not Applicable
Power Factor 0.9 | Not Applicable
Protection Class II | Not Applicable
Wattage 9 | 12 *W
Control DIG On-Off | DIM 0-10V | NMX DMX Ready | DALI


Photometry & Performance

Light Source LED SMD
Delivered Output Single Color 540lm
RGB 180lm
RGBW 240lm
Tunable White 180lm

Luminaire Efficacy 60lm/W | RGB 20lm/W | RGBW 20lm/W | TW 20lm/W

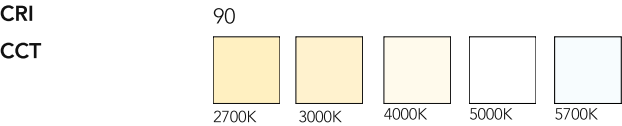


Beam Angle

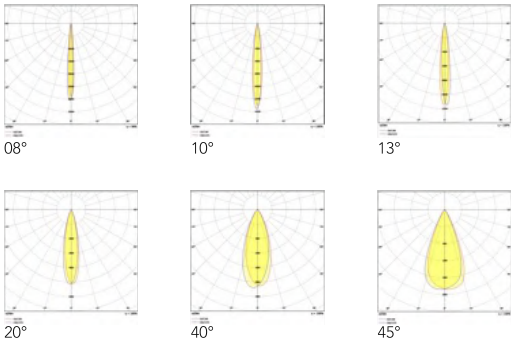

Accessories

Included	Control Gear
Sold Separately	Honeycomb Louvre

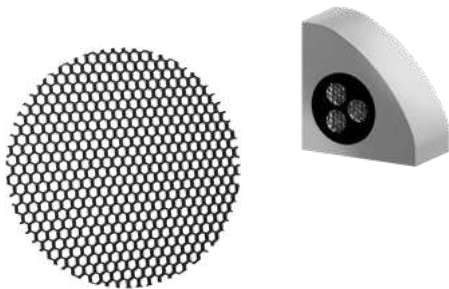

Certifications & Standards

CE
RoHS
LM80
IEC61347

pro step honeycomb

pro step honeycomb is a diffuser accessory that offers enhanced glare control and uniform light distribution

PSHSMNOBNNNONOTNONONOT
*honeycomb available on request

Body Color Black
Body Material Aluminum

Product Code					*For RGB variations only	**For RGBW variations only	***For Tunable White variations only				
P	S	C	SM	10	G	T	66	OUT	CT	BM	CON
Family	Sub	Product	Mounting	Dimension	Body	Diffuser	IP	Output	CCT	Beam	Control
								540 540lm	27 2700K	08 08deg	DIG On-Off
								180 180lm*	30 3000K	10 10deg	DIM 0-10V
								240 240lm**	40 4000K	13 13deg	NMX DMX
								180 180lm***	50 5000K	20 20deg	Ready
									57 5700K	40 40deg	NMX DMX
									60 6000K	45 45deg	Ready
									65 6500K		DAL DALI
									RG RGB*		
									RW RGBW**		
									TU Tunable		
									1800-6500K***		

pro step linear

pro step linear is a linear step lamp that features its compact and easy-to-install design with anti-slip and anti-theft features, perfect for any installation. It supports wide voltage input, DMX512, and energy-efficient technology



surface
mounted



architectural
outdoor



residential




commercial




landscape

front view



side view



General Luminaire Data

*available upon request

Body Color



grey



any other
RAL colors *

Diffuser Color



opal



transparent

Body Material

Aluminum

Diffuser Material

Polycarbonate

Ingress Protection

65

Lifetime

50,000hrs

Electrical Characteristics

*For RGBW variations only

Voltage

24V

Wattage

12 | 15 *W

Control

Not Included | NMX DMX Ready

Photometry & Performance

Light Source

LED SMD

Delivered Output

Single Color 720lm

RGB 240lm

RGBW 300lm

Tunable White 240lm

Luminaire Efficacy

60lm/W | RGB 20lm/W | RGBW 20lm/W |

TW 20lm/W

CRI

90

CCT

2700K

3000K

4000K

5000K

5700K

6000K

6500K


RGB

RGBW

TW

1800-6500K

Beam Angle



120°

Accessories

Sold Separately Control Gear

Certifications & Standards

CE
RoHS
LM80
IEC61347

Product Code					*For RGB variations only	**For RGBW variations only	***For Tunable White variations only				
P	S	C	SM	85	G	D	65	OUT	CT	12	CON
Family	Sub	Product	Mounting	Dimension	Body	Diffuser	IP	Output	CCT	Beam	Control
						O Opal		720 720lm	27 2700K		NOT Included
						T Transparent		240 240lm*	30 3000K		NMX DMX
								300 3000lm**	40 4000K		Ready*
								240 240lm***	50 5000K		NMX DMX
									57 5700K		Ready**
									60 6000K		
									65 6500K		
									RG RGB*		
									RW RGBW**		
									TU Tunable		
									1800-6500K***		

pro



step fin

pro step fin is a LED path luminaire with a unique design that blends seamlessly into any installation scene. It features a wide voltage input, precise electronics for energy efficiency, and bionic accessories that integrate with the environment.



front view

side view

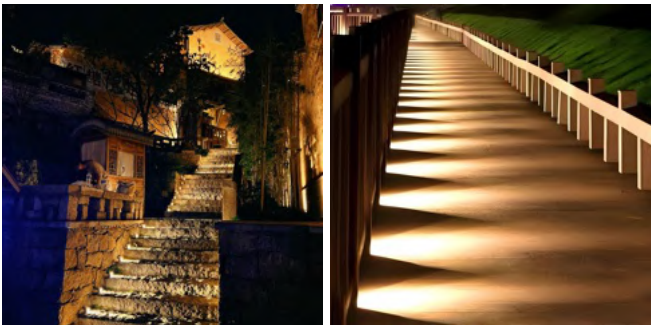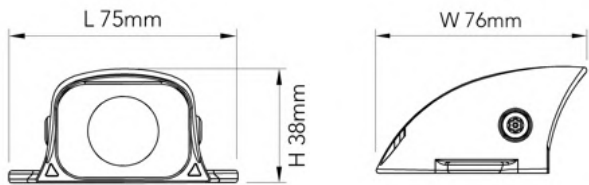

General Luminaire Data

*available upon request

Body Color



Diffuser Color



Body Material	Aluminum
Diffuser Material	Tempered Glass
Ingress Protection	66
Lifetime	50,000hrs


Electrical Characteristics

Voltage	220-240V
Frequency	50-60Hz
Power Factor	0.9
Protection	Class II
Wattage	3W
Control	DIG On-Off DIM 0-10V

Photometry & Performance


Light Source	LED SMD
Delivered Output	180lm
Luminaire Efficacy	60lm/W
CRI	90
CCT	2700K 3000K 4000K 5000K 5700K 6000K 6500K

Beam Angle

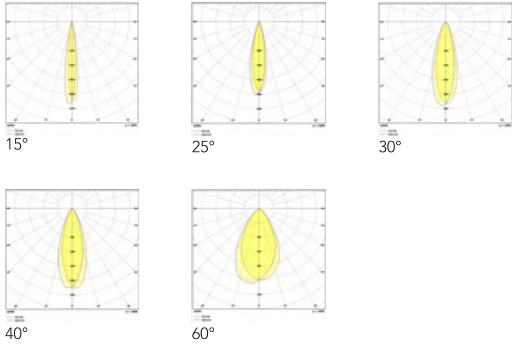

Accessories

Included	Control Gear
Sold Separately	Honeycomb Louvre



Certifications & Standards

CE
RoHS
LM80
IEC61347

pro fin honeycomb

pro fin honeycomb is a diffuser accessory that offers enhanced glare control and uniform light distribution

PFHSMNOBNNONOTNONONOT
*honeycomb available on request

Body Color Black
Body Material Aluminum



Product Code

P	S	F	SM	75	G	T	66	180	CT	BM	CON
Family	Sub	Product	Mounting	Dimension	Body	Diffuser	IP	Output	CCT	Beam	Control
									27 2700K	15 15deg	DIG On-Off
									30 3000K	25 25deg	DIM 0-10V
									40 4000K	30 30deg	
									50 5000K	40 40deg	
									57 5700K	60 60deg	
									60 6000K		
									65 6500K		

pro

round step

pro round step is a round-shaped step light offers asymmetrical lighting distribution, making it perfect for enhancing both safety and visual appeal in landscape settings. With its surface-mounted design, it ensures quick, hassle-free installation and provides a more competitive, cost-effective lighting solution

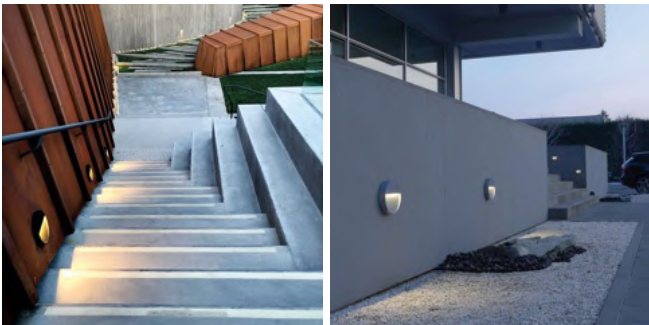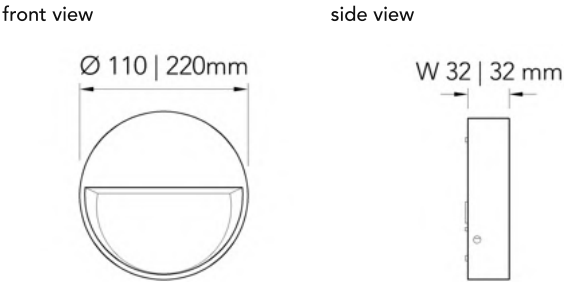


General Luminaire Data

Body Color	black white grey silver sandy matt sandy matt
Diffuser Color	transparent
Body Material	Aluminum
Diffuser Material	Tempered Glass
Ingress Protection	65
Lifetime	50,000hrs

Electrical Characteristics

Voltage	24V
Wattage	4 12W
Control	Not included NAL DALI Ready

Photometry & Performance

Light Source	LED SMD
Delivered Output	360 1080lm
Luminaire Efficacy	90lm/W
CRI	80
CCT	2700K 3000K 4000K 5000K
Beam Angle	 Asymmetric Beam 30°

Accessories		Certifications & Standards
Included	Mounting Plate Screws	CE RoHS LM80 IEC61347
Sold Separately	Control Gear	

Product Code					*Parameters not interselectable . Each dimension to be matched with corresponding output						
P	R	S	SM	DM*	B	T	65	OUT*	CT	AB	CON
Family	Sub	Product	Mounting	Dimension	Body	Diffuser	IP	Output	CCT	Beam	Control
				11 110mm	B Black Sandy			110 110lm	27 2700K		NOT Incl
				22 220mm	Matt			330 330lm	30 3000K		NAL DAL
					W White Sandy				40 4000K		Rea
					Matt				50 5000K		
					G Grey						
					S Silver						

pro

square step

pro square step features its sleek square design, this step light provides precise asymmetrical illumination, ideal for contemporary landscape settings. Its surface-mounted installation ensures quick setup and offers a cost-effective solution for enhancing both safety and aesthetics in outdoor environments



surface mounted



architectural outdoor



residential




commercial




landscape

front view



side view



General Luminaire Data

Body Color



black
sandy matt



white
sandy matt



grey



silver

Diffuser Color



transparent

Body Material

Aluminum

Diffuser Material

Tempered Glass

Ingress Protection

65

Lifetime

50,000hrs

Photometry & Performance

Light Source

LED SMD

Delivered Output

472 | 1416lm

Luminaire Efficacy

118lm/W

CRI

80

CCT



2700K



3000K




4000K



5000K

Beam Angle



Asymmetric Beam 30°

Electrical Characteristics

Voltage

24V

Wattage

4 | 12W

Control

Not included | NAL DALI Ready

Accessories		Certifications & Standards
Included	Mounting Plate Screws	CE RoHS
Sold Separately	Control Gear	LM80 IEC61347

Product Code

*Parameters not **interselectable**. Each dimension to be matched with corresponding output

P	S	S	SM	DM*	B	T	65	OUT*	CT	AB	CON
Family	Sub	Product	Mounting	Dimension	Body	Diffuser	IP	Output	CCT	Beam	Control
				11 110mm	B Black Sandy			472 472lm	27 2700K		NOT Included
				22 220mm	Matt			141 1416lm	30 3000K		NAL DALI
					W White Sandy				40 4000K		Ready
					Matt				50 5000K		
					G Grey						
					S Silver						

pro

square grille

pro square grille features a modern square design and delivers precise asymmetrical illumination, making it ideal for contemporary landscape applications. Its surface-mounted design allows for quick installation, offering a stylish and cost-effective solution to enhance outdoor safety and aesthetics



surface mounted



architectural outdoor



residential




commercial




landscape



front view



side view



General Luminaire Data

Body Color



black
sandy matt



white
sandy matt



grey



silver

Reflector Color



transparent

Body Material

Aluminum

Diffuser Material

Tempered Glass

Ingress Protection

65

Lifetime

50,000hrs

Electrical Characteristics

Voltage

24V

Wattage

4 | 12W

Control

Not included | NAL DALI Ready

Photometry & Performance

Light Source

LED SMD

Delivered Output

472 | 1416lm

Luminaire Efficacy

118lm/W

CRI

80

CCT



2700K



3000K




4000K



5000K

Beam Angle



Asymmetric Beam 30°

Accessories		Certifications & Standards
Included	Mounting Plate Screws	CE RoHS LM80 IEC61347
Sold Separately	Control Gear	

Product Code

*Parameters not **interselectable**. Each dimension to be matched with corresponding output

P	S	G	SM	DM*	B	T	65	OUT*	CT	AB	CON
Family	Sub	Product	Mounting	Dimension	Body	Diffuser	IP	Output	CCT	Beam	Control
				11 110mm	B Black Sandy			472 472lm	27 2700K		NOT Included
				22 220mm	Matt			141 1416lm	30 3000K		NAL DALI
					W White Sandy				40 4000K		Ready
					Matt				50 5000K		
					G Grey						
					S Silver						

pro

rectangular step

pro rectangular step features its modern rectangular form, this step light offers asymmetrical lighting distribution, making it ideal for illuminating walkways, steps, and low walls in landscape environments. Its surface-mounted installation allows for easy setup, providing a practical and competitively priced solution for outdoor lighting needs



surface mounted



architectural outdoor



residential




commercial




landscape

front view



side view



General Luminaire Data

Body Color



black
sandy matt



white
sandy matt



grey



silver

Diffuser Color



transparent

Body Material

Aluminum

Diffuser Material

Tempered Glass

Ingress Protection

65

Lifetime

50,000hrs

Photometry & Performance

Light Source

LED SMD

Delivered Output

1476lm

Luminaire Efficacy

123lm/W

CRI

80

CCT



2700K




3000K



4000K



5000K



Asymmetric Beam 30°

Electrical Characteristics

Voltage

24V

Wattage

12W

Control

Not included | NAL DALI Ready

Accessories		Certifications & Standards
Included	Mounting Plate Screws	CE RoHS
Sold Separately	Control Gear	LM80 IEC61347


Product Code

P	R	S	SM	27	B	T	65	147	CT	AB	CON
Family	Sub	Product	Mounting	Dimension	Body	Diffuser	IP	Output	CCT	Beam	Control
					B Black Sandy				27 2700K		NOT Included
					Matt				30 3000K		NAL DALI
					W White Sandy				40 4000K		Ready
					Matt				50 5000K		
					G Grey						
					S Silver						

pro

rectangular grille

pro rectangular grille showcases a sleek, rectangular form and delivers asymmetrical light distribution perfect for illuminating walkways, steps, and low walls in outdoor landscapes. Its surface-mounted design ensures easy installation, offering a practical and cost-effective solution for enhancing both safety and ambiance in exterior settings

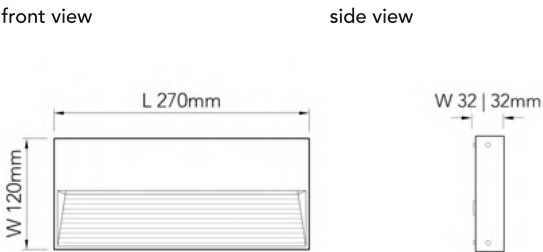

General Luminaire Data


Body Color	black white grey silver sandy matt sandy matt
Diffuser Color	transparent
Body Material	Aluminum
Diffuser Material	Tempered Glass
Ingress Protection	65
Lifetime	50,000hrs

Electrical Characteristics

Voltage	24V
Wattage	12W
Control	Not included NAL DALI Ready

Photometry & Performance

Light Source	LED SMD
Delivered Output	1476lm
Luminaire Efficacy	123lm/W
CRI	80
CCT	2700K 3000K 4000K 5000K



Asymmetric Beam 40°

Accessories		Certifications & Standards
Included	Mounting Plate Screws	CE RoHS
Sold Separately	Control Gear	LM80 IEC61347

Product Code											
P	R	G	SM	27	B	T	65	147	CT	AB	CON
Family	Sub	Product	Mounting	Dimension	Body	Diffuser	IP	Output	CCT	Beam	Control
					B Black Sandy				27 2700K		NOT Included
					Matt				30 3000K		NAL DALI
					W White Sandy				40 4000K		Ready
					Matt				50 5000K		
					G Grey						
					S Silver						



handrail fixtures

introducing our exceptional handrail fixtures, meticulously engineered and crafted to elevate outdoor spaces with enduring elegance and tailored functionality. These handrail fixtures redefine the outdoor ambiance, providing a welcoming and well-lit environment

in addition to their captivating design, these architectural outdoor handrail lights enhance safety and elevate the visual appeal of outdoor spaces, ensuring that areas are both inviting and secure



durable body
material




diverse beam
angles



multiple CCTs




IP rating



high luminaire
efficacy



practical and safe

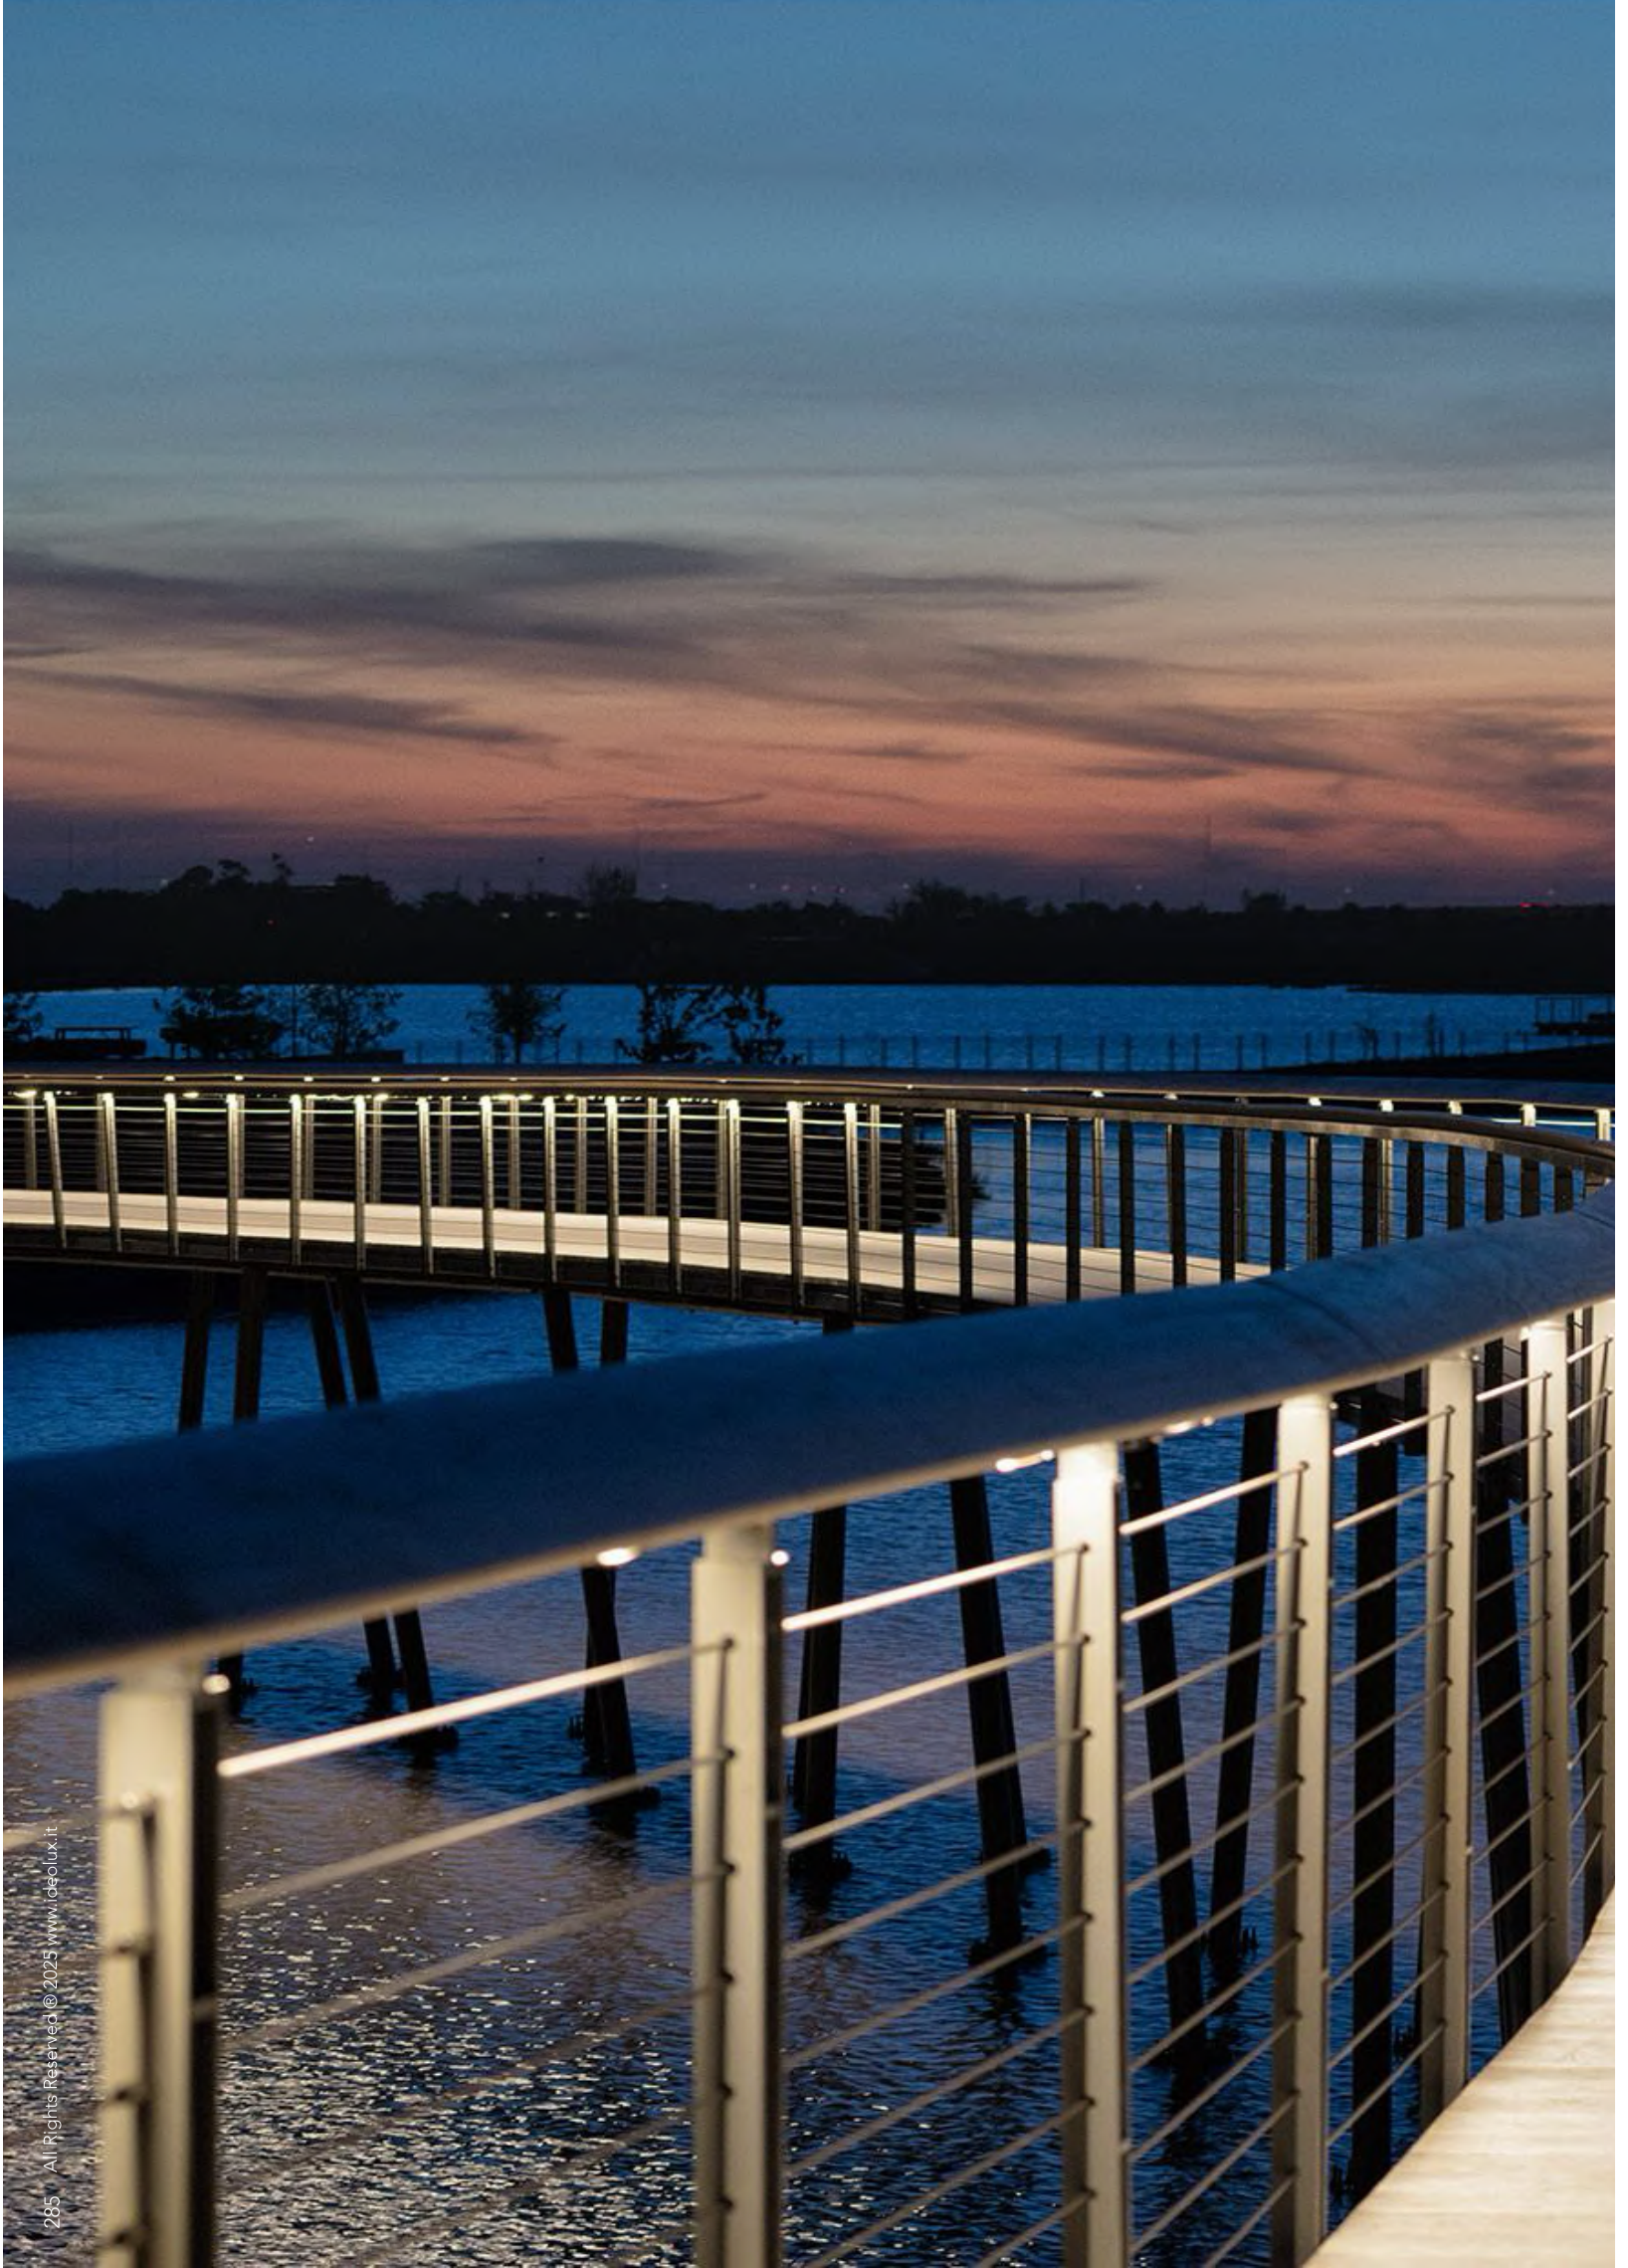





pro rail spot

pro rail spot is an LED lighting fixture specifically designed for handrails. With its robust stainless steel build and minimal design, it is perfect for bridge railings, deck railings, and general railings



side view

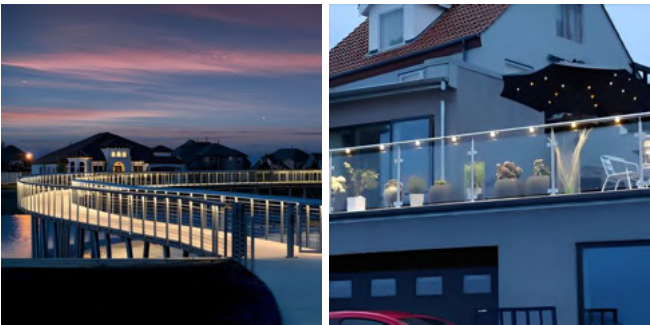





General Luminaire Data

Body Color		
	stainless steel	matt black
Diffuser Color		
	prismatic	
Body Material	Stainless Steel	
Diffuser Material	PMMA	
Ingress Protection	67	
Lifetime	50,000hrs	

Electrical Characteristics

Voltage	24V
Wattage	1.2 1.5W
Control	Not Included

Photometry & Performance

Light Source	LED SMD			
Delivered Output	120 150lm			
Luminaire Efficacy	100lm/W			
CRI	80			
CCT				
	2700K	3000K	4000K	6000K
Beam Angle				
	15°		30°	
				
	55°		Asymmetric Beam 55°	

Accessories		Certifications & Standards
Sold Separately	Control Gear	CE RoHS LM80 IEC61347

Product Code											
P	R	S	SR	18	B	P	67	OUT	CT	BM	NOT
Family	Sub	Product	Mounting	Dimension	Body	Diffuser	IP	Output	CCT	Beam	Control
					S Stainless Steel			120 120lm	27 2700K	15 15deg	
					B Black Matt			150 150lm	30 3000K	30 30deg	
									40 4000K	55 55deg	
									60 6000K	AB Asymmetric	
										55deg	

pro

rail snoot

pro rail snoot is an IP67 LED lighting fixture specifically designed for handrails. Its simple design and resilient stainless build makes it ideal for general railings applications. It also comes with multiple CCTs options.



surface mounted



architectural outdoor



residential




commercial



landscape

side view



General Luminaire Data

Body Color	 stainless steel
Diffuser Color	 prismatic
Body Material	Stainless Steel
Diffuser Material	PMMA
Ingress Protection	67
Lifetime	50,000hrs


Electrical Characteristics

Voltage	24V
Wattage	2W
Control	Not Included

Photometry & Performance

Light Source	LED SMD
Delivered Output	136lm
Luminaire Efficacy	68lm/W
CRI	80
CCT	 2700K 3000K 4000K 6000K

Beam Angle



Accessories

Sold Separately Control Gear

Certifications & Standards

CE
RoHS
LM80
IEC61347

Product Code


P	R	S	SM	30	S	P	67	136	CT	50	NOT
Family	Sub	Product	Mounting	Dimension	Body	Diffuser	IP	Output	CCT	Beam	Control
									27 2700K		
									30 3000K		
									40 4000K		
									60 6000K		

pro rail flat

pro rail flat is an IP67 LED lighting fixture specifically designed for flat handrails. With its robust body and minimal design, it is perfect for bridge railings, deck railings, and general railings



front view

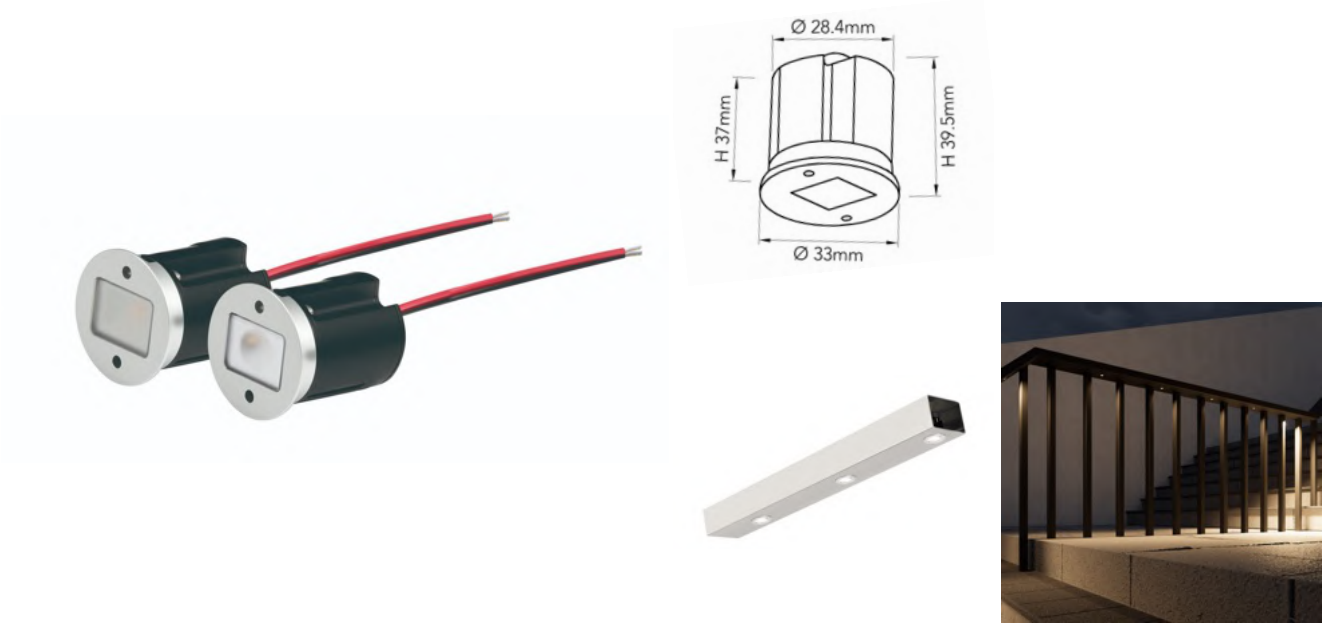



General Luminaire Data

Body Color	 silver
Diffuser Color	 frosted  transparent
Body Material	Aluminum
Diffuser Material	PMMA
Ingress Protection	67
Lifetime	50,000hrs

Electrical Characteristics

Voltage	24V
Wattage	1.5W
Control	Not Included

Photometry & Performance

Light Source	LED SMD
Delivered Output	109lm
Luminaire Efficacy	73lm/W
CRI	80
CCT	 2700K  3000K  4000K  6000K
Beam Angle	 80°  Asymmetric Beam 60°

Accessories

Sold Separately Control Gear

Certifications & Standards

CE
RoHS
LM80
IEC61347

Product Code

*Parameters not **interselectable**. Each dimension to be matched with corresponding output

P	R	F	SR	33	S	D*	67	109	CT	BM*	NOT
Family	Sub	Product	Mounting	Dimension	Body	Diffuser	IP	Output	CCT	Beam	Control
						F Frosted			27 2700K	80 80deg	
						T Transparent			30 3000K	AB AB 60	
									40 4000K		
									60 6000K		


pro

rail flat

pro rail flat is an IP67 LED lighting fixture specifically designed for flat handrails. With its robust body and minimal design, it is perfect for bridge railings, deck railings, and general railings



side view



General Luminaire Data

Body Color		
	stainless steel	matt black
Diffuser Color		transparent
Body Material	Stainless Steel	
Diffuser Material	PMMA	
Ingress Protection	67	
Lifetime	50,000hrs	


Electrical Characteristics

Voltage	24V
Wattage	1.5W
Control	Not Included

Photometry & Performance

Light Source	LED SMD
Delivered Output	152lm
Luminaire Efficacy	101lm/W
CRI	80
CCT	 2700K  3000K  4000K  6000K

Beam Angle



Asymmetric Beam 90°

Accessories		Certifications & Standards
Sold Separately	Control Gear	CE RoHS LM80 IEC61347

Product Code											
P	R	F	SR	37	S	T	67	152	CT	AB	NOT
Family	Sub	Product	Mounting	Dimension	Body	Diffuser	IP	Output	CCT	Beam	Control
									27 2700K		
									30 3000K		
									40 4000K		
									60 6000K		



pro rail bar

pro rail bar is an LED lighting fixture specifically designed for handrails. With its robust body and minimal design, it is perfect for bridge railings, deck railings, and general railings



side view

front view

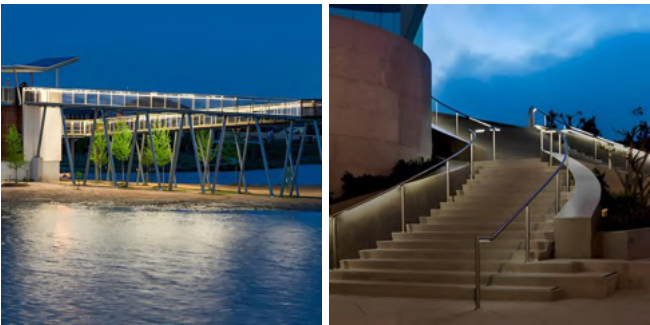

General Luminaire Data

Body Color		
	matt black	matt white
Diffuser Color		
	opal	
Body Material	Aluminum	
Diffuser Material	PMMA	
Ingress Protection	67	
Lifetime	50,000hrs	


Electrical Characteristics

Voltage	24V
Wattage	0.5 1.5 2.5 3.5W
Control	Not Included

Photometry & Performance

Light Source	LED SMD			
Delivered Output	25 75 125 175lm			
Luminaire Efficacy	50lm/W			
CRI	80			
CCT				
	2700K	3000K	4000K	6000K

Beam Angle



Accessories		Certifications & Standards
Sold Separately	Control Gear	CE RoHS LM80 IEC61347

Product Code

*Parameters not **interselectable**. Each dimension to be matched with corresponding output



P	R	B	SR	DM*	B	O	67	OUT*	CT	11	NOT
Family	Sub	Product	Mounting	Dimension	Body	Diffuser	IP	Output	CCT	Beam	Control
				85 85mm	B Black Matt			025 25lm	27 2700K		
				18 185mm	W White Matt			075 075lm	30 3000K		
				28 285mm				125 125lm	40 4000K		
				38 385mm				175 175lm	60 6000K		

pro rail bar

pro rail bar is an LED lighting fixture specifically designed for handrails. With its robust body and minimal design, it is perfect for bridge railings, deck railings, and general railings



front view

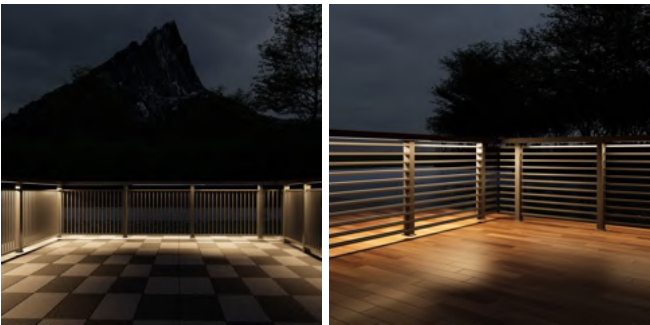


General Luminaire Data

Body Color		
	matt black	matt white
Diffuser Color		opal
Body Material	Aluminum	
Diffuser Material	PMMA	
Ingress Protection	67	
Lifetime	50,000hrs	

Electrical Characteristics

Voltage	24V
Wattage	0.5 1.5 2.5 3.5W
Control	Not Included

Photometry & Performance

Light Source	LED SMD			
Delivered Output	35 105 175 245lm			
Luminaire Efficacy	70lm/W			
CRI	80			
CCT				
	2700K	3000K	4000K	6000K
Beam Angle				
	110°			

Accessories		Certifications & Standards
Sold Separately	Control Gear	CE RoHS LM80 IEC61347

Product Code

*Parameters not **interselectable**. Each dimension to be matched with corresponding output

P	R	B	SR	DM*	B	O	67	OUT*	CT	11	NOT
Family	Sub	Product	Mounting	Dimension	Body	Diffuser	IP	Output	CCT	Beam	Control
				80 80mm	B Black Matt			035 035lm	27 2700K		
				18 180mm	W White Matt			105 105lm	30 3000K		
				28 280mm				175 175lm	40 4000K		
				38 380mm				245 245lm	60 6000K		

pro

rail bar

pro rail bar is an LED lighting fixture specifically designed for handrails. With its robust body and minimal design, it is perfect for bridge railings, deck railings, and general railings



surface mounted



architectural outdoor



residential




commercial



landscape

front view



General Luminaire Data

Body Color	silver
Diffuser Color	opal
Body Material	Aluminum
Diffuser Material	PMMA
Ingress Protection	67
Lifetime	50,000hrs


Electrical Characteristics

Voltage	24V
Wattage	4W
Control	Not Included

Photometry & Performance

Light Source	LED SMD
Delivered Output	108lm
Luminaire Efficacy	27lm/W
CRI	80
CCT	2700K 3000K 4000K 6000K

Beam Angle



Accessories

Sold Separately Control Gear

Certifications & Standards

CE
RoHS
LM80
IEC61347

Product Code

P	R	B	SM	30	S	O	67	108	CT	10	NOT
Family	Sub	Product	Mounting	Dimension	Body	Diffuser	IP	Output	CCT	Beam	Control
									27 2700K		
									30 3000K		
									40 4000K		
									60 6000K		




brass fixtures

featuring our premium brass fixture series, this landscape light delivers powerful illumination while enhancing the beauty of outdoor spaces. Its elegant design makes it ideal for highlighting pathways, gardens, and architectural features


crafted from solid cast brass, this fixture delivers exceptional durability and corrosion resistance, standing up to the elements year after year. Its robust construction ensures long-lasting performance, while the natural patina that develops over time adds timeless character making it an ideal choice for both residential and commercial landscape lighting



enhanced
aesthetic



special finish




multiple CCTs



DMX

dmx control
function



elegant/stylish



RGBW





pro

brass spike

pro brass spike features its solid cast brass housing and a sleek cylindrical design, this fixture blends effortlessly into any landscape. Its durable build includes an integrated spike accessory for easy installation



surface mounted



architectural outdoor



residential




commercial



landscape

front view



General Luminaire Data

Body Color



aged brass



matt black

Reflector Color



aged brass



matt black

Body Material

Solid Cast Brass

Reflector Material

Solid Cast Brass

Ingress Protection

68

Lifetime

50,000hrs

Photometry & Performance

Light Source

LED SMD

Delivered Output

Single Color 252 | 315lm

RGBW 028 | 056lm

Tunable White 162 | 324lm

Luminaire Efficacy

63lm/W | RGBW 14lm/W | TW 81lm/W

CRI

85

CCT



2700K



3000K



4000K




RGBW




TW

2700K-4000K


Beam Angle



15°



45°



60°

Electrical Characteristics

Voltage

12V | 24V

Wattage

Single Color 4 | 5W

RGBW 2 | 4W

Tunable White 2 | 4W

Control

Not Included | NMX DMX Ready |

NAL DALI Ready

Accessories

- Sold Separately
- Control Gear

Honeycomb

Stake

Mounting Base

Extension Arm

* see details on page 307

Certifications & Standards

- CE
- RoHS
- LM80
- IEC61347

Product Code

P

B

S

SM

63

Family

Sub


Product

Mounting

Dimension

*Parameters not **interselectable**. Each dimension to be matched with corresponding output
For RGBW variations only *For Tunable White variations only

B*	R*	68	OUT	CT	BM	CON
Body	Reflector	IP	Output	CCT	Beam	Control
A Aged Brass	A Aged Brass		252 252lm	27 2700K	15 15deg	NOT Included
B Black Matt	B Black Matt		315 315lm	30 3000K	45 45deg	NMX DMX
			028 028lm**	40 4000K	60 60deg	Ready**
			056 056lm**	RW RGBW**		NAL DALI
			162 162lm***	TU Tunable		Ready
			324 324lm***	2700-4000K***		

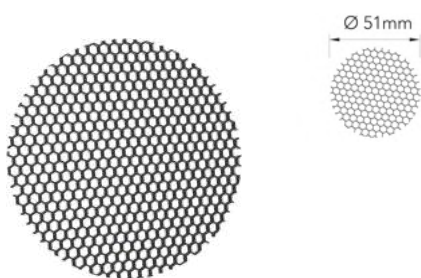

pro brass honeycomb

pro brass honeycomb is a diffuser accessory that offers enhanced glare control and uniform light distribution

Ø 51mm PBBSM51BNNONOTNONONOT

Body Color  Black
Body Material Aluminum




pro brass base

pro brass base is a base mount accessory to be combined with pro brass cylindrical, stake and/or extension arm

Ø 76.2mm PBBSM76ANNONOTNONONOT

Ø 76.2mm PBBSM76BNNONOTNONONOT

Body Color  Aged Brass  Black
Body Material Brass

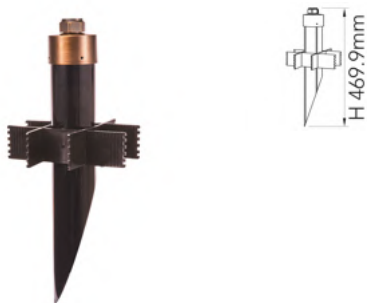

pro brass stake

pro brass stake is a ground stake accessory used to support ground installation

H 469.9mm PBSSM46BNNONOTNONONOT

Body Color  Black
Body Material PVC



pro brass stake

pro brass stake is a ground stake accessory used to support ground installation

H 203.2mm PBSIR20BNNONOTNONONOT

H 203.2mm PBSIR20BNNONOTNONONOT

Body Color  Brown  Black
Body Material PVC




pro brass stake

pro brass stake is a ground stake accessory used to support ground installation

- H 203.2mm PBSIR20BNNONOTNONONOT
- H 203.2mm PBSIR20BNNONOTNONONOT

Body Color ■ Brown ■ Black
Body Material PVC



pro brass extension

pro brass extension is an extension arm to be combined with stake. Also can be directly connected to pro brass cylindrical

- H 152.4mm PBEFM15ANNONOTNONONOT
- H 152.4mm PBEFM15BNNONOTNONONOT
- H 304.8mm PBEFM30ANNONOTNONONOT
- H 304.8mm PBEFM30BNNONOTNONONOT
- H 457.2mm PBEFM45ANNONOTNONONOT
- H 457.2mm PBEFM45BNNONOTNONONOT

Body Color ■ Aged Brass ■ Black
Body Material Brass

pro

brass spike

pro brass spike features its solid cast brass housing and a sleek cylindrical design, this fixture blends effortlessly into any landscape. Its durable build includes an integrated spike accessory for easy installation



surface mounted



architectural outdoor



residential




commercial






landscape



front view



side view



General Luminaire Data

Body Color



aged brass



matt black

Reflector Color



aged brass



matt black

Body Material

Solid Cast Brass

Reflector Material

Solid Cast Brass

Ingress Protection

65

Lifetime

50,000hrs

Electrical Characteristics

Voltage

12V | 24V

Wattage

4 | 5 | 6W

Control

Not Included | NMX DMX Ready |
NAL DALI Ready

Photometry & Performance

Light Source

LED SMD

Delivered Output

Single Color 285 | 356 | 427lm

RGBW 278 | 347 | 417lm

Tunable White 306 | 383 | 460lm

Luminaire Efficacy

71.3lm/W | RGBW 69.5lm/W | TW 76.7lm/W

CRI

80

CCT



2700K



3000K



4000K




RGBW




TW

2700K-4000K


Beam Angle



15°



45°



60°

Accessories

Included	Bracket
	Screws
Sold Separately	Control Gear
	Mounting Base
	Junction Box



Certifications & Standards

CE
RoHS
LM80
IEC61347

pro brass base
pro brass base is a base mount accessory to be combined with
pro brass round, stake and/or extension arm
Ø 76.2mm PBBSM76ANNONOTNONONOT
Ø 76.2mm PBBSM76BNNONOTNONONOT

Body Color Aged Brass Black
Body Material Brass



pro brass box
pro brass box is a junction box used to be combined with pro brass
down for tree mounting application
H 106.1mm PPPSM75WNNONOTNONONOT

Body Color Black
Body Material Aluminum

Product Code

P	B	S	SM	DM	B*	R*	65	OUT	CT	BM	CON
Family	Sub	Product	Mounting	Dimension	Body	Reflector	IP	Output	CCT	Beam	Control
				16 165.1mm	A Aged Brass	A Aged Brass		285 285lm	27 2700K	15 15deg	NOT Included
				20 203.5mm	B Black Matt	B Black Matt		356 356lm	30 3000K	45 45deg	NMX DMX
								427 427lm	40 4000K	60 60deg	Ready**
								278 278lm**	RW RGBW**		NAL DALI
								347 347lm**	TU Tunable		Ready
								417 417lm**	2700-4000K***		
								306 306lm***			
								383 383lm***			
								460 460lm***			

*Parameters not **interselectable**. Each dimension to be matched with corresponding output
For RGBW variations only *For Tunable White variations only

pro brass flood

pro brass flood features its solid cast brass housing and a versatile round-shaped design which is expertly engineered to ensure even light distribution for a flawless illumination experience



surface
mounted



architectural
outdoor



residential




commercial



landscape

front view



General Luminaire Data

Body Color



aged
brass



matt
black

Reflector Color



aged
brass



matt
black

Body Material

Solid Cast Brass

Reflector Material

Solid Cast Brass

Ingress Protection

65

Lifetime

50,000hrs

Electrical Characteristics

Voltage

12V | 24V

Wattage

4 | 8 | 10W

Control

Not Included | NAL DALI Ready

Photometry & Performance

*available upon request

Light Source

LED SMD

Delivered Output

312 | 624 | 780lm

Luminaire Efficacy

78lm/W

CRI

80

CCT

2700K

3000K

4000K

2700K

3000K

4000K

2700K

3000K

4000K

2700K

3000K

4000K

2700K

3000K

4000K

2700K

3000K

4000K

2700K

3000K

4000K

2700K

3000K

4000K

2700K

3000K

4000K

2700K

3000K

4000K

2700K

3000K

4000K

2700K

3000K

4000K

2700K

3000K

4000K

2700K

3000K

4000K

2700K

3000K

4000K

2700K

3000K

4000K

2700K

3000K

4000K

2700K

3000K

4000K

2700K

3000K

4000K

2700K

3000K

4000K

2700K

3000K

4000K

2700K

3000K

4000K

2700K

3000K

4000K

2700K

3000K

4000K

2700K

3000K

4000K

2700K

3000K

4000K

2700K

3000K

4000K

2700K

3000K

4000K

2700K

3000K

4000K

2700K

3000K

4000K

2700K

3000K

4000K

2700K

3000K

4000K

2700K

3000K

4000K

2700K

3000K


4000K

2700K


3000K

4000K


Beam Angle




20°



30°



40°



45°

Accessories

- Sold Separately
- Control Gear

Stake

Mounting Base

Extension Arm

* see details on page 313


Certifications & Standards

- CE
- RoHS
- LM80
- IEC61347

Product Code

*Parameters not **interselectable**. Each dimension to be matched with corresponding output

P	B	F	SM	12	B*	R*	65	OUT	CT	BM	CON
Family	Sub	Product	Mounting	Dimension	Body	Reflector	IP	Output	CCT	Beam	Control
					A Aged Brass	A Aged Brass		312 312lm	27 2700K	20 20deg	NOT Included
					B Black Matt	B Black Matt		624 624lm	30 3000K	30 30deg	NAL DALI
								780 780lm	40 4000K	40 40deg	Ready
										45 45deg	



pro brass base

pro brass base is a base mount accessory to be combined with
pro brass round, stake and/or extension arm
Ø 76.2mm PBBSM76ANNONOTNONONOT
Ø 76.2mm PBBSM76BNNONOTNONONOT

Body Color  Aged Brass  Black
Body Material Brass



pro brass stake

pro brass stake is a ground stake accessory used to support
ground installation
H 469.9mm PBSSM46BNNONOTNONONOT

Body Color  Black
Body Material PVC



pro brass stake

pro brass stake is a ground stake accessory used to support ground
installation
H 355.6mm PBSIR35ANNONOTNONONOT
H 355.6mm PBSIR35BNNONOTNONONOT

Body Color  Brown  Black
Body Material PVC



pro brass stake

pro brass stake is a ground stake accessory used to support ground
installation
H 355.6mm PBSIR35ANNONOTNONONOT
H 355.6mm PBSIR35BNNONOTNONONOT

Body Color  Brown  Black
Body Material PVC



pro brass extension

pro brass extension is an extension arm to be combined with stake.
Also can be directly connected to pro brass cylindrical

- H 152.4mm PBEFM15ANNONOTNONONOT
- H 152.4mm PBEFM15BNNONOTNONONOT
- H 304.8mm PBEFM30ANNONOTNONONOT
- H 304.8mm PBEFM30BNNONOTNONONOT
- H 457.2mm PBEFM45ANNONOTNONONOT
- H 457.2mm PBEFM45BNNONOTNONONOT

Body Color  Aged Brass  Black
Body Material Brass


pro

brass wall

pro brass wall is made from solid cast brass, this LED wall light emits a soft, balanced glow from both the top and bottom, accentuating architectural details and exterior geometry. Designed for durability and elegance, it enhances structures with a striking nighttime presence



side view



General Luminaire Data

Body Color	aged brass matt black matt white
Diffuser Color	transparent
Body Material	Solid Cast Brass
Diffuser Material	Glass
Ingress Protection	65
Lifetime	50,000hrs


Electrical Characteristics

Voltage	12V 24V
Wattage	2 4W
Control	Not Included NMX DMX Ready NAL DALI Ready

Photometry & Performance

Light Source	LED SMD
Delivered Output	Single Color 214 428lm RGBW 184 368lm Tunable White 274 549lm
Luminaire Efficacy	107lm/W RGBW 92.1lm/W TW 137.3lm/W
CRI	80
CCT	2700K 3000K 4000K RGBW TW 2700K-4000K

Beam Angle



Accessories

Sold Separately Control Gear

Certifications & Standards

CE
RoHS
LM80
IEC61347

Product Code

*For RGBW variations only **For Tunable White variations only

P	B	W	WM	63	B	T	65	OUT	CT	25	CON
Family	Sub	Product	Mounting	Dimension	Body	Diffuser	IP	Output	CCT	Beam	Control
					A Aged Brass			214 214lm	27 2700K		NOT Included
					B Black Matt			428 428lm	30 3000K		NMX DMX
					W White Matt			184 184lm*	40 4000K		Ready*
								368 368lm*	RW RGBW*		NAL DALI
								274 274lm**	TU Tunable		Ready
								549 549lm**	2700-4000K**		


pro

brass wall

pro brass wall is made from solid cast brass, this LED wall light emits a soft, balanced glow from both the top and bottom, accentuating architectural details and exterior geometry. Designed for durability and elegance, it enhances structures with a striking nighttime presence



front view



General Luminaire Data

Body Color	 aged brass
Diffuser Color	 frosted
Body Material	Solid Cast Brass
Diffuser Material	Polycarbonate
Ingress Protection	65
Lifetime	50,000hrs

Electrical Characteristics


Voltage	12V 24V
Wattage	2.5 3W
Control	Not Included

Photometry & Performance

*available upon request

Light Source	LED SMD
Delivered Output	250 300lm
Luminaire Efficacy	100lm/W
CRI	80
CCT	 2700K  3000K  4000K  RGBW *  TW 2700K-4000K *

Beam Angle



Accessories		Certifications & Standards
Sold Separately	Control Gear	CE RoHS LM80 IEC61347

Product Code


*Parameters not **interselectable**. Each dimension to be matched with corresponding output

P	B	W	WM	DM*	A	F	65	OUT*	CT	25	NOT
Family	Sub	Product	Mounting	Dimension	Body	Diffuser	IP	Output	CCT	Beam	Control
				76 76.2mm				250 250lm	27 2700K		
				15 152.4mm				300 300lm	30 3000K		
									40 4000K		

pro

brass pendant

pro brass pendant is a solid cast brass versatile pendant downlight features an adjustable, extendable shroud for precise illumination. It includes an 18-inch mounting chain for effortless installation



General Luminaire Data

Body Color		
	aged brass	matt black
Reflector Color		
	aged brass	matt black
Body Material	Solid Cast Brass	
Reflector Material	Solid Cast Brass	
Ingress Protection	65	
Lifetime	50,000hrs	


Electrical Characteristics

Voltage	12V 24V
Wattage	4 5 6W
Control	Not Included NMX DMX Ready NAL DALI Ready

Photometry & Performance

Light Source	LED SMD		
Delivered Output	Single Color 107 134 161lm		
	RGBW 032 040 048lm		
	Tunable White 071 089 107lm		
Luminaire Efficacy	26.9lm/W RGBW 8lm/W TW 17.9lm/W		
CRI	80		
CCT			
	2700K	3000K	4000K
			
	RGBW	TW 2700K-4000K	

Beam Angle

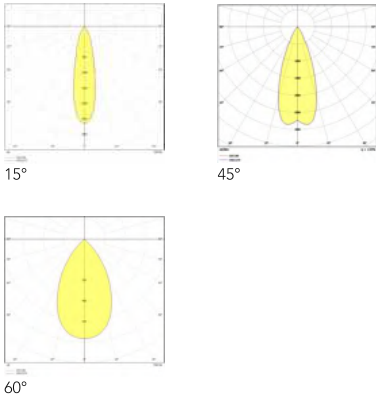

Accessories

Included	Hanging Chain
Sold Separately	Control Gear

Certifications & Standards


CE
RoHS
LM80
IEC61347

Product Code					*Parameters not interselectable . Each dimension to be matched with corresponding output						
					For RGBW variations only			*For Tunable White variations only			
P	B	P	CS	57	B*	R*	65	OUT	CT	BM	CON
Family	Sub	Product	Mounting	Dimension	Body	Reflector	IP	Output	CCT	Beam	Control
					A Aged Brass	A Aged Brass		107 107lm	27 2700K	15 15deg	NOT Included
					B Black Matt	B Black Matt		134 134lm	30 3000K	45 45deg	NMX DMX
								161 161lm	40 4000K	60 60deg	Ready**
								032 032lm**	RW RGBW**		NAL DALI
								040 040lm**	TU Tunable		Ready
								048 048lm**	2700-4000K***		
								071 071lm***			
								089 089lm***			
								107 107lm***			

pro

brass pendant

pro brass pendant is a solid cast brass versatile pendant downlight features an adjustable, extendable shroud for precise illumination. It includes an 18-inch mounting chain for effortless installation



General Luminaire Data

Body Color		
	aged brass	matt black
Reflector Color		
	aged brass	matt black
Body Material	Solid Cast Brass	
Reflector Material	Solid Cast Brass	
Ingress Protection	65	
Lifetime	50,000hrs	


Electrical Characteristics

Voltage	12V 24V
Wattage	4 5 6W
Control	Not Included NMX DMX Ready NAL DALI Ready

Photometry & Performance

Light Source	LED SMD		
Delivered Output	Single Color 043 054 065lm		
	RGBW 029 036 043lm		
	Tunable White 070 087 105lm		
Luminaire Efficacy	10.9lm/W RGBW 7.3lm/W TW 17.5lm/W		
CRI	80		
CCT			
	2700K	3000K	4000K
			
	RGBW	TW 2700K-4000K	

Beam Angle

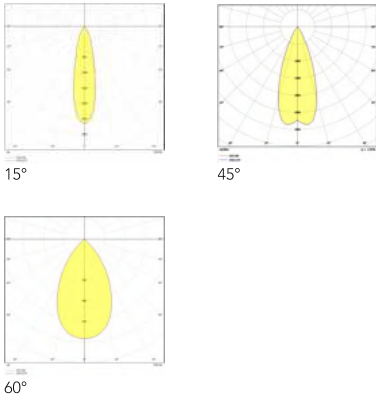

Accessories

Included	Hanging Chain
Sold Separately	Control Gear

Certifications & Standards

CE
RoHS
LM80
IEC61347

Product Code					*Parameters not interselectable . Each dimension to be matched with corresponding output						
					For RGBW variations only			*For Tunable White variations only			
P	B	P	CS	63	B*	R*	65	OUT	CT	BM	CON
Family	Sub	Product	Mounting	Dimension	Body	Reflector	IP	Output	CCT	Beam	Control
					A Aged Brass	A Aged Brass		043 043lm	27 2700K	15 15deg	NOT Included
					B Black Matt	B Black Matt		054 054lm	30 3000K	45 45deg	NMX DMX
								065 065lm	40 4000K	60 60deg	Ready**
								029 029lm**	RW RGBW**		NAL DALI
								036 036lm**	TU Tunable		Ready
								043 043lm**	2700-4000K***		
								070 070lm***			
								087 087lm***			
								105 105lm***			

pro

brass washer

pro brass washer is a flexible wall washer and floodlight designed to provide consistent, even illumination. Ideal for enhancing walls, signage, and architectural features, it ensures optimal lighting coverage for both residential and commercial applications



surface mounted



architectural outdoor



residential




commercial






landscape



front view



side view



General Luminaire Data

Body Color



aged brass



matt black

Diffuser Color



frosted



transparent

Body Material

Solid Cast Brass

Diffuser Material

Polycarbonate

Ingress Protection

IP65

Lifetime

50,000hrs

Electrical Characteristics

Voltage

12V | 24V

Wattage

4 | 5 | 6W

Control

Not Included | NMX DMX Ready |
NAL DALI Ready

Photometry & Performance

Light Source

LED SMD

Delivered Output

Single Color 112 | 140 | 168lm

RGBW 104 | 130 | 156lm

Tunable White 262 | 328 | 393lm

Luminaire Efficacy

28lm/W | RGBW 26lm/W | TW 65.6lm/W

CRI

80

CCT



2700K



3000K



4000K




RGBW




TW
2700K-4000K

Beam Angle



45°



60°

Accessories

Sold Separately	Control Gear
	Stake
	Mounting Base
	Extension Arm

* see details on page 325

Certifications & Standards


CE
RoHS
LM80
IEC61347

Product Code

P	B	W	SM	10	B	D	65	OUT	CT	BM	CON
Family	Sub	Product	Mounting	Dimension	Body	Diffuser	IP	Output	CCT	Beam	Control
					A Aged Brass	F Frosted		112 112lm	27 2700K	45 45deg	NOT Included
					B Black Matt	T Transparent		140 140lm	30 3000K	60 60deg	NMX DMX
								168 168lm	40 4000K		Ready*
								104 104lm*	RW RGBW*		NAL DALI
								130 130lm*	TU Tunable		Ready
								156 156lm*	2700-4000K**		
								262 262lm**			
								328 328lm**			
								393 393lm**			

*For RGBW variations only

**For Tunable White variations only



pro brass base

pro brass base is a base mount accessory to be combined with
pro brass round, stake and/or extension arm
Ø 76.2mm PBBSM76ANNONOTNONONOT
Ø 76.2mm PBBSM76BNNONOTNONONOT

Body Color  Aged Brass  Black
Body Material Brass



pro brass stake

pro brass stake is a ground stake accessory used to support
ground installation
H 469.9mm PBSSM46BNNONOTNONONOT

Body Color  Black
Body Material PVC



pro brass stake

pro brass stake is a ground stake accessory used to support ground
installation
H 215.9mm PBSIR21ANNONOTNONONOT
H 215.9mm PBSIR21BNNONOTNONONOT


Body Color  Brown  Black
Body Material PVC



pro brass stake

pro brass stake is a ground stake accessory used to support ground
installation
H 215.9mm PBSIR21ANNONOTNONONOT
H 215.9mm PBSIR21BNNONOTNONONOT

Body Color  Brown  Black
Body Material PVC



pro brass extension

pro brass extension is an extension arm to be combined with stake.
Also can be directly connected to pro brass cylindrical

- H 152.4mm PBEFM15ANNONOTNONONOT
- H 152.4mm PBEFM15BNNONOTNONONOT
- H 304.8mm PBEFM30ANNONOTNONONOT
- H 304.8mm PBEFM30BNNONOTNONONOT
- H 457.2mm PBEFM45ANNONOTNONONOT
- H 457.2mm PBEFM45BNNONOTNONONOT

Body Color  Aged Brass  Black
Body Material Brass

pro

brass washer

pro brass washer is a flexible wall washer and floodlight designed to provide consistent, even illumination. Ideal for enhancing walls, signage, and architectural features, it ensures optimal lighting coverage for both residential and commercial applications



surface mounted



architectural outdoor



residential




commercial





landscape



front view



side view



General Luminaire Data

Body Color



aged brass



matt black

Diffuser Color



frosted



transparent

Body Material

Solid Cast Brass

Diffuser Material

Polycarbonate

Ingress Protection

IP65

Lifetime

50,000hrs

Electrical Characteristics

Voltage

12V | 24V

Wattage

4 | 5 | 6W

Control

Not Included | NMX DMX Ready |
NAL DALI Ready

Photometry & Performance

Light Source

LED SMD

Delivered Output

Single Color 246 | 307 | 369lm

RGBW 038 | 048 | 058lm

Tunable White 316 | 395 | 474lm

Luminaire Efficacy

61.5lm/W | RGBW 9.7lm/W | TW 79lm/W

CRI

80

CCT



2700K



3000K



4000K




RGBW




TW
2700K-4000K

Beam Angle



45°



60°

Accessories

- Sold Separately
- Control Gear

Stake

Mounting Base

Extension Arm

* see details on page 329

Certifications & Standards


- CE
- RoHS
- LM80
- IEC61347

Product Code

P	B	W	SM	13	B	D	65	OUT	CT	BM	CON
Family	Sub	Product	Mounting	Dimension	Body	Diffuser	IP	Output	CCT	Beam	Control
					A Aged Brass	F Frosted		246 246lm	27 2700K	45 45deg	NOT Included
					B Black Matt	T Transparent		307 307lm	30 3000K	60 60deg	NMX DMX
								369 369lm	40 4000K		Ready*
								038 038lm*	RW RGBW*		NAL DALI
								048 048lm*	TU Tunable		Ready
								058 058lm*	2700-4000K**		
								316 316lm**			
								395 395lm**			
								474 474lm**			

*For RGBW variations only

**For Tunable White variations only



pro brass base

pro brass base is a base mount accessory to be combined with
pro brass round, stake and/or extension arm
Ø 76.2mm PBBSM76ANNONOTNONONOT
Ø 76.2mm PBBSM76BNNONOTNONONOT

Body Color  Aged Brass  Black
Body Material Brass



pro brass stake

pro brass stake is a ground stake accessory used to support
ground installation
H 469.9mm PBSSM46BNNONOTNONONOT

Body Color  Black
Body Material PVC



pro brass stake

pro brass stake is a ground stake accessory used to support ground
installation
H 355.6mm PBSIR35ANNONOTNONONOT
H 355.6mm PBSIR35BNNONOTNONONOT

Body Color  Brown  Black
Body Material PVC



pro brass stake

pro brass stake is a ground stake accessory used to support ground
installation
H 355.6mm PBSIR35ANNONOTNONONOT
H 355.6mm PBSIR35BNNONOTNONONOT

Body Color  Brown  Black
Body Material PVC



pro brass extension

pro brass extension is an extension arm to be combined with stake.
Also can be directly connected to pro brass cylindrical

- H 152.4mm PBEFM15ANNONOTNONONOT
- H 152.4mm PBEFM15BNNONOTNONONOT
- H 304.8mm PBEFM30ANNONOTNONONOT
- H 304.8mm PBEFM30BNNONOTNONONOT
- H 457.2mm PBEFM45ANNONOTNONONOT
- H 457.2mm PBEFM45BNNONOTNONONOT

Body Color  Aged Brass  Black
Body Material Brass

pro

brass shade

pro brass shade is a solid cast brass area light designed with a sturdy polycarbonate lens, it ensures long-lasting performance and resiliency. Available in both transparent and frosted options, it provides versatile lighting solutions to suit various outdoor settings



surface mounted



architectural outdoor



residential




commercial





landscape

front view



top view



General Luminaire Data

Body Color



aged brass



matt black

Diffuser Color



frosted



transparent

Body Material

Solid Cast Brass

Diffuser Material

Polycarbonate

Ingress Protection

65

Lifetime

50,000hrs

Electrical Characteristics

Voltage

12V | 24V

Wattage

2 | 4 | 6W

Control

Not Included | NMX DMX Ready |
NAL DALI Ready

Photometry & Performance

Light Source

LED SMD

Delivered Output

Single Color 070 | 141 | 212lm

RGBW 025 | 050 | 076lm

Tunable White 041 | 082 | 123lm

Luminaire Efficacy

35.4lm/W | RGBW 12.7lm/W | TW 20.6lm/W

CRI

80

CCT



2700K



3000K



4000K




RGBW



TW
2700K-4000K

Beam Angle



Accessories

Sold Separately

Control Gear

Stake

Mounting Base



Certifications & Standards

CE

RoHS

LM80

IEC61347

pro brass base

pro brass base is a base mount accessory to be combined with
pro brass top, stake and/or extension arm
Ø 76.2mm PBBSM76ANNONOTNONONOT
Ø 76.2mm PBBSM76BNNONOTNONONOT

Body Color Aged Brass Black

Body Material Brass

pro brass stake

pro brass stake is a ground stake accessory used to support
ground installation
H 469.9mm PBBSM46BNNONOTNONONOT

Body Color Black

Body Material PVC

pro brass stake

pro brass stake is a ground stake accessory used to support ground
installation
H 215.9mm PBSIR21BNNONOTNONONOT
H 355.6mm PBSIR35BNNONOTNONONOT

Body Color Brown Black

Body Material PVC

pro brass stake

pro brass stake is a ground stake accessory used to support ground
installation
H 215.9mm PBSIR21BNNONOTNONONOT
H 355.6mm PBSIR35BNNONOTNONONOT

Body Color Brown Black

Body Material PVC

Product Code

*For RGBW variations only **For Tunable White variations only

P	B	S	SM	DM	B	D	65	OUT	CT	36	CON
Family	Sub	Product	Mounting	Dimension	Body	Diffuser	IP	Output	CCT	Beam	Control
				19 196.90mm	A Aged Brass	F Frosted		070 070lm	27 2700K		NOT Included
				30 304.8mm	B Black Matt	T Transparent		141 141lm	30 3000K		NMX DMX
								212 212lm	40 4000K		Ready*
								025 025lm*	RW RGBW*		NAL DALI
								050 050lm*	TU Tunable		Ready
								076 076lm*	2700-4000K**		
								041 041lm**			
								082 082lm**			
								123 123lm**			

pro

brass shade

pro brass shade is a solid cast brass area light designed with a sturdy polycarbonate lens, it ensures long-lasting performance and resiliency. Available in both transparent and frosted options, it provides versatile lighting solutions to suit various outdoor settings



surface mounted



architectural outdoor



residential




commercial




landscape

front view



top view



General Luminaire Data

Body Color	aged brass aged brass black black
Diffuser Color	frosted frosted transparent transparent
Body Material	Solid Cast Brass
Diffuser Material	Polycarbonate
Ingress Protection	65
Lifetime	50,000hrs


Electrical Characteristics

Voltage	12V 24V
Wattage	2 4 6W
Control	Not Included NMX DMX Ready NAL DALI Ready

Photometry & Performance

Light Source	LED SMD
Delivered Output	Single Color 070 141 212lm RGBW 025 050 076lm Tunable White 041 082 123lm
Luminaire Efficacy	35.4lm/W RGBW 12.7lm/W TW 20.6lm/W
CRI	80
CCT	2700K 3000K 4000K RGBW TW 2700K-4000K

Beam Angle



Accessories

Sold Separately

Control Gear

Stake

Mounting Base



Certifications & Standards

CE

RoHS

LM80

IEC61347

pro brass base

pro brass base is a base mount accessory to be combined with
pro brass top, stake and/or extension arm
Ø 76.2mm PBBSM76ANNONOTNONONOT
Ø 76.2mm PBBSM76BNNONOTNONONOT

Body Color Aged Brass Black

Body Material Brass

pro brass stake

pro brass stake is a ground stake accessory used to support
ground installation
H 469.9mm PBBSM46BNNONOTNONONOT

Body Color Black

Body Material PVC

pro brass stake

pro brass stake is a ground stake accessory used to support ground
installation
H 215.9mm PBSIR21BNNONOTNONONOT
H 355.6mm PBSIR35BNNONOTNONONOT

Body Color Brown Black

Body Material PVC

pro brass stake

pro brass stake is a ground stake accessory used to support ground
installation
H 215.9mm PBSIR21BNNONOTNONONOT
H 355.6mm PBSIR35BNNONOTNONONOT

Body Color Brown Black

Body Material PVC

Product Code


*For RGBW variations only **For Tunable White variations only

P	B	S	SM	DM	B	D	65	OUT	CT	36	CON
Family	Sub	Product	Mounting	Dimension	Body	Diffuser	IP	Output	CCT	Beam	Control
				38 38.1mm	A Aged Brass	F Frosted		070 070lm	27 2700K		NOT Included
				15 158.8mm	B Black Matt	T Transparent		141 141lm	30 3000K		NMX DMX
								212 212lm	40 4000K		Ready*
								025 025lm*	RW RGBW*		NAL DALI
								050 050lm*	TU Tunable		Ready
								076 076lm*	2700-4000K**		
								041 041lm**			
								082 082lm**			
								123 123lm**			

pro

brass shade

pro brass shade is a solid cast brass area light designed with a sturdy polycarbonate lens, it ensures long-lasting performance and resiliency. Available in both transparent and frosted options, it provides versatile lighting solutions to suit various outdoor settings

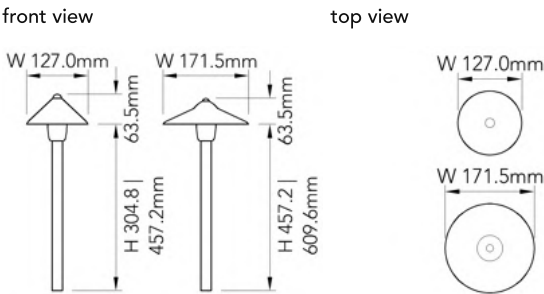

General Luminaire Data

Body Color	aged brass aged brass aged brass aged brass
Diffuser Color	frosted frosted transparent transparent
Body Material	Solid Cast Brass
Diffuser Material	Polycarbonate
Ingress Protection	65
Lifetime	50,000hrs


Electrical Characteristics

Voltage	12V 24V
Wattage	2 4 6W
Control	Not Included NMX DMX Ready NAL DALI Ready

Photometry & Performance

Light Source	LED SMD
Delivered Output	Single Color 070 141 212lm RGBW 025 050 076lm Tunable White 041 082 123lm
Luminaire Efficacy	35.4lm/W RGBW 12.7lm/W TW 20.6lm/W
CRI	80
CCT	2700K 3000K 4000K RGBW TW 2700K-4000K

Beam Angle



Accessories

Sold Separately

Control Gear

Stake

Mounting Base



Certifications & Standards

CE

RoHS

LM80

IEC61347

pro brass base

pro brass base is a base mount accessory to be combined with
pro brass top, stake and/or extension arm
Ø 76.2mm PBBSM76ANNONOTNONONOT
Ø 76.2mm PBBSM76BNNONOTNONONOT

Body Color Aged Brass Black

Body Material Brass

pro brass stake

pro brass stake is a ground stake accessory used to support
ground installation
H 469.9mm PBSSM46BNNONOTNONONOT

Body Color Black

Body Material PVC

pro brass stake

pro brass stake is a ground stake accessory used to support ground
installation
H 215.9mm PBSIR21BNNONOTNONONOT
H 355.6mm PBSIR35BNNONOTNONONOT

Body Color Brown Black

Body Material PVC

pro brass stake

pro brass stake is a ground stake accessory used to support ground
installation
H 215.9mm PBSIR21BNNONOTNONONOT
H 355.6mm PBSIR35BNNONOTNONONOT

Body Color Brown Black

Body Material PVC

Product Code

*For RGBW variations only **For Tunable White variations only

P	B	S	SM	DM	B	D	65	OUT	CT	36	CON
Family	Sub	Product	Mounting	Dimension	Body	Diffuser	IP	Output	CCT	Beam	Control
				12 127mm	A Aged Brass	F Frosted		070 070lm	27 2700K		NOT Included
				17 171.5mm	B Black Matt	T Transparent		141 141lm	30 3000K		NMX DMX
								212 212lm	40 4000K		Ready*
								025 025lm*	RW RGBW*		NAL DALI
								050 050lm*	TU Tunable		Ready
								076 076lm*	2700-4000K**		
								041 041lm**			
								082 082lm**			
								123 123lm**			



pro

brass bollard

pro brass bollard is a stylish directional bollard seamlessly integrates into existing landscapes. Its low-voltage design allows for easy retrofitting, offering clear visual guidance without requiring new line-voltage wiring



front view
*height can be customized upon request

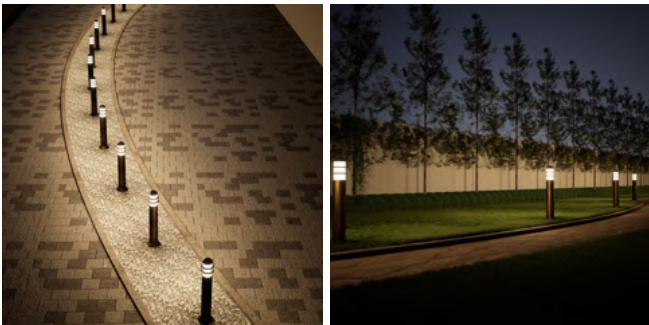

General Luminaire Data


Body Color	aged brass matt black
Diffuser Color	frosted transparent
Body Material	Solid Cast Brass
Diffuser Material	Polycarbonate
Ingress Protection	65
Lifetime	50,000hrs

Electrical Characteristics

Voltage	12V 24V
Wattage	3.5W
Control	Not Included

Photometry & Performance

Light Source	LED SMD
Delivered Output	350lm
Luminaire Efficacy	100lm/W
CRI	80
CCT	2700K 3000K 4000K

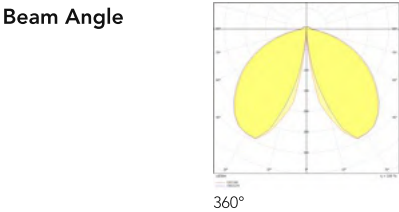

Accessories		Certifications & Standards
Included	Anchor Bolts	CE
Sold Separately	Control Gear	RoHS
		LM80
		IEC61347

Product Code										
P	B	B	FM	15	B	D	65	350	CT	36 NOT
Family	Sub	Product	Mounting	Dimension	Body	Diffuser	IP	Output	CCT	Beam Control
					A Aged Brass	F Frosted			27 2700K	
					B Black Matt	T Transparent			30 3000K	
									40 4000K	


pro

brass rectangular

pro brass rectangular is designed to complement modern architecture and minimalist landscapes, this fixture provides exceptional area lighting while maintaining a subtle presence. Its sleek and unobtrusive design ensures seamless integration into any setting, offering effective illumination without becoming a visual distraction



side view
*height can be customized upon request

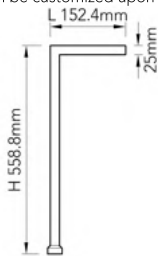

General Luminaire Data

Body Color		
	aged brass	matt black
Diffuser Color		
	frosted	transparent
Body Material	Solid Cast Brass	
Diffuser Material	Polycarbonate	
Ingress Protection	65	
Lifetime	50,000hrs	


Electrical Characteristics

Voltage	12V 24V
Wattage	2.5W
Control	Not Included NMX DMX Ready NAL DALI Ready

Photometry & Performance

Light Source	LED SMD		
Delivered Output	Single Color 200lm		
	RGBW 081lm		
	Tunable White 130lm		
Luminaire Efficacy	80lm/W RGBW 32.4lm/W TW 52lm/W		
CRI	80		
CCT			
	2700K	3000K	4000K
			
	RGBW	TW 2700K-4000K	

Beam Angle



Accessories

Sold Separately

Control Gear

Stake

Mounting Base



Certifications & Standards

CE

RoHS

LM80

IEC61347

pro brass base

pro brass base is a base mount accessory to be combined with
pro brass top, stake and/or extension arm
 $\varnothing 76.2\text{mm}$ PBBSM76ANNONOTNONONOT
 $\varnothing 76.2\text{mm}$ PBBSM76BNNONOTNONONOT

Body Color Aged Brass Black

Body Material Brass

pro brass stake

pro brass stake is a ground stake accessory used to support
ground installation
H 469.9mm PBSSM46BNNONOTNONONOT

Body Color Black

Body Material PVC

pro brass stake

pro brass stake is a ground stake accessory used to support ground
installation
H 215.9mm PBSIR21BNNONOTNONONOT
H 355.6mm PBSIR35BNNONOTNONONOT

Body Color Brown Black

Body Material PVC

pro brass stake

pro brass stake is a ground stake accessory used to support ground
installation
H 215.9mm PBSIR21BNNONOTNONONOT
H 355.6mm PBSIR35BNNONOTNONONOT

Body Color Brown Black

Body Material PVC

Product Code

P **B** **R** **FM** **15**

Family Sub Product Mounting Dimension

B

Body

A Aged Brass

B Black Matt

D

Diffuser

F Frosted

T Transparent

*For RGBW variations only

65 **OUT**

IP Output

200 200lm

081 081lm*

130 130lm**

**For Tunable White variations only

CT

CCT

27 2700K

30 3000K

40 4000K

RW RGBW*

TU Tunable

2700-4000K**

12

Beam

CON

Control

NOT Included

NMX DMX

Ready*

NAL DALI

Ready


pro

brass top



pro brass top features a solid cast brass construction for durability and elegance. It enhances the landscape with its refined appearance, while providing a warm, guiding glow. A concealed mounting base plate ensures a seamless and sophisticated installation



side view



side view

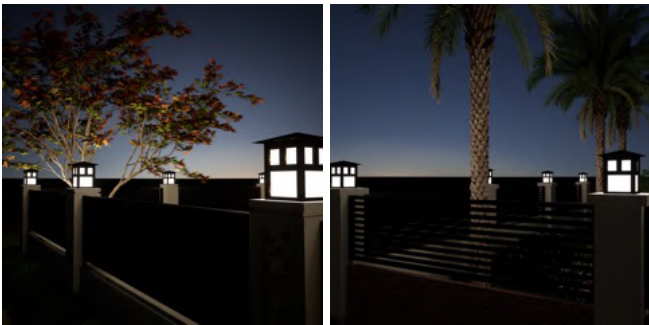

General Luminaire Data

Body Color	aged brass matt black
Diffuser Color	opal
Body Material	Solid Cast Brass
Diffuser Material	Polycarbonate
Ingress Protection	65
Lifetime	50,000hrs


Electrical Characteristics

Voltage	12V 24V
Wattage	4 5 6W
Control	Not Included

Photometry & Performance

Light Source	LED SMD
Delivered Output	268 335 402lm
Luminaire Efficacy	67lm/W
CRI	80
CCT	2700K 3000K 4000K

Beam Angle



Accessories		Certifications & Standards
Included	Mounting Base Plate	CE
Sold Separately	Control Gear	RoHS
		LM80
		IEC61347

Product Code										
P	B	T	SM	DM	B	O	65	OUT	CT	45 NOT
Family	Sub	Product	Mounting	Dimension	Body	Diffuser	IP	Output	CCT	Beam Control
				13 133.3mm	A Aged Brass			268 268lm	27 2700K	
				27 279.4mm	B Black Matt			335 335lm	30 3000K	
								402 402lm	40 4000K	


pro

brass up

pro brass up features a solid cast brass body and lid. Its compact design allows for discreet placement, making it an excellent alternative to traditional path lights. The transparent convex lens delivers clear illumination, while multiple anti-glare accessories enhance visual comfort and versatility



side view



General Luminaire Data

Body Color	aged brass matt black
Diffuser Color	transparent
Body Material	Solid Cast Brass
Diffuser Material	Polycarbonate
Ingress Protection	65
Lifetime	50,000hrs


Electrical Characteristics

Voltage	12V 24V
Wattage	4 5 6W
Control	Not Included NMX DMX Ready NAL DALI Ready

Photometry & Performance

Light Source	LED SMD
Delivered Output	Single Color 322 402 483lm RGBW 238 297 357lm Tunable White 370 462 555lm
Luminaire Efficacy	80.5lm/W RGBW 59.5lm/W TW 92.5lm/W
CRI	80
CCT	2700K 3000K 4000K RGBW TW 2700K-4000K

Beam Angle

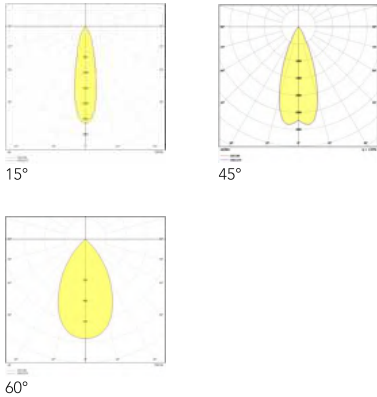

Accessories

Sold Separately Control Gear
Anti-glare Accessories

* see details on page 345

Certifications & Standards

CE
RoHS
LM80
IEC61347

Product Code

P	B	U	IR	88	B	T	65	OUT	CT	BM	CON
Family	Sub	Product	Mounting	Dimension	Body	Diffuser	IP	Output	CCT	Beam	Control
					A Aged Brass			322 322lm	27 2700K	15 15deg	NOT Included
					B Black Matt			402 402lm	30 3000K	45 45deg	NMX DMX
								483 483lm	40 4000K	60 60deg	Ready*
								238 238lm*	RW RGBW*		NAL DALI
								297 297lm*	TU Tunable		Ready
								357 357lm*	2700-4000K**		
								370 370lm**			
								462 462lm**			
								555 555lm**			

*For RGBW variations only **For Tunable White variations only



pro brass grille
pro brass grille is an anti-glare accessory used to reduced glare for
uplighting of pro brass up
Ø 88.9mm PBGSM88ANNONOTNONONOT
Ø 88.9mm PBGSM88BNNONOTNONONOT

Body Color  Aged Brass  Black
Body Material Brass



pro brass snoot
pro brass snoot is an anti-glare accessory used to reduce glare for
pro brass up, ensuring a comfortable wall washing illumination
Ø 88.9mm PBSSM88ANNONOTNONONOT
Ø 88.9mm PBSSM88BNNONOTNONONOT

Body Color  Aged Brass  Black
Body Material Brass



pro brass duo
pro brass duo is an anti-glare accessory used to light pro brass up
side-ways
Ø 88.9mm PBDSM88ANNONOTNONONOT
Ø 88.9mm PBDSM88BNNONOTNONONOT

Body Color  Aged Brass  Black
Body Material Brass



pro brass arc
pro brass arc is an anti-glare accessory used to light pro brass up in
a 180° direction
Ø 88.9mm PBASM88ANNONOTNONONOT
Ø 88.9mm PBASM88BNNONOTNONONOT

Body Color  Aged Brass  Black
Body Material Brass



pro brass over

pro brass over is a 360° anti-glare accessory used to light pro brass up in a 4-way pattern

Ø 88.9mm PBOSM88ANNONOTNONONOT

Ø 88.9mm PBOSM88BNNONOTNONONOT

Body Color  Aged Brass  Black
Body Material Brass


pro

brass up

pro brass up features a solid cast brass body and lid. Its compact design allows for discreet placement, making it an excellent alternative to traditional path lights. The transparent convex lens delivers clear illumination, while multiple anti-glare accessories enhance visual comfort and versatility



side view



General Luminaire Data

Body Color	aged brass mat black
Diffuser Color	transparent
Body Material	Solid Cast Brass
Diffuser Material	Polycarbonate
Ingress Protection	67
Lifetime	50,000hrs


Electrical Characteristics

Voltage	12V 24V
Wattage	4 5 6W
Control	Not Included NMX DMX Ready NAL DALI Ready

Photometry & Performance

Light Source	LED COB
Delivered Output	Single Color 370 462 555lm RGBW 354 442 531lm Tunable White 422 527 633lm
Luminaire Efficacy	92.5lm/W RGBW 88.5lm/W TW 105.5lm/W
CRI	80
CCT	2700K 3000K 4000K RGBW TW 2700K-4000K

Beam Angle

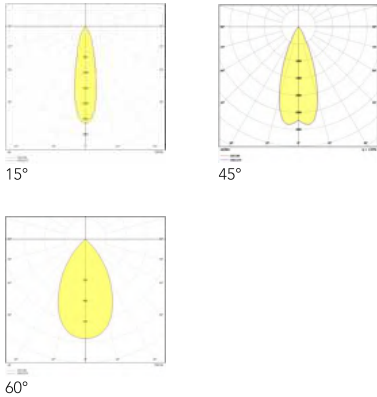

Accessories

Sold Separately Control Gear
Anti-glare Accessories

* see details on page 349

Certifications & Standards

CE
RoHS
LM80
IEC61347

Product Code

*For RGBW variations only **For Tunable White variations only

P	B	U	IR	12	B	T	67	OUT	CT	BM	CON
Family	Sub	Product	Mounting	Dimension	Body	Diffuser	IP	Output	CCT	Beam	Control
					A Aged Brass			370 370lm	27 2700K	15 15deg	NOT Included
					B Black Matt			462 462lm	30 3000K	45 45deg	NMX DMX
								555 555lm	40 4000K	60 60deg	Ready*
								354 354lm*	RW RGBW*		NAL DALI
								442 442lm*	TU Tunable		Ready
								531 531lm*	2700-4000K**		
								422 422lm**			
								527 527lm**			
								633 633lm**			



pro brass grille

pro brass grille is an anti-glare accessory used to reduced glare for uplighting of pro brass up

Ø 123.6mm PBGSM12ANNONOTNONONOT

Ø 123.6mm PBGSM12BNNONOTNONONOT

Body Color  Aged Brass  Black
Body Material Brass



pro brass snoot

pro brass snoot is an anti-glare accessory used to reduce glare for pro brass up, ensuring a comfortable wall washing illumination

Ø 123.6mm PBSSM12ANNONOTNONONOT

Ø 123.6mm PBSSM12BNNONOTNONONOT

Body Color  Aged Brass  Black
Body Material Brass



pro brass polar

pro brass polar is a dome-shaped anti-glare accessory used to direct light from the pro brass up in an asymmetrical way

Ø 123.6mm PBPSM12ANNONOTNONONOT

Ø 123.6mm PBPSM12BNNONOTNONONOT

Body Color  Aged Brass  Black
Body Material Brass



pro brass duo

pro brass duo is an anti-glare accessory used to light pro brass up side-ways

Ø 123.6mm PBDSM12ANNONOTNONONOT

Ø 123.6mm PBDSM12BNNONOTNONONOT

Body Color  Aged Brass  Black
Body Material Brass



pro brass arc

pro brass arc is an anti-glare accessory used to light pro brass up in a 180° direction

Ø 123.6mm PBASM12ANNONOTNONONOT

Ø 123.6mm PBASM12BNNONOTNONONOT

Body Color  Aged Brass  Black
Body Material Brass



pro brass over

pro brass over is a 360° anti-glare accessory used to light pro brass up in a 4-way pattern

Ø 123.6mm PBOSM12ANNONOTNONONOT

Ø 123.6mm PBOSM12BNNONOTNONONOT

Body Color  Aged Brass  Black
Body Material Brass


pro

brass step

pro brass step is a solid cast brass step light that features two diffuser options, a louvered face for focused illumination and a frosted lens for a softer glow. Its durable polycarbonate lens enhances longevity, ensuring reliable performance in any environment



front view



General Luminaire Data

Body Color	aged brass matt black
Diffuser Color	frosted
Body Material	Solid Cast Brass
Diffuser Material	Polycarbonate
Ingress Protection	65
Lifetime	50,000hrs


Electrical Characteristics

Voltage	12V 24V
Wattage	6.5 12W
Control	Not Included NMX DMX Ready NAL DALI Ready

Photometry & Performance

Light Source	LED SMD
Delivered Output	Single Color 331 612lm RGBW 598 1105lm Tunable White 892 1647lm
Luminaire Efficacy	51lm/W RGBW 92.1lm/W TW 137.3lm/W
CRI	80
CCT	2700K 3000K 4000K RGBW TW 2700K-4000K

Beam Angle



Accessories

Included	Screws
Sold Separately	Control Gear

Certifications & Standards

CE
RoHS
LM80
IEC61347

Product Code											*Parameters not interselectable . Each dimension to be matched with corresponding output	
P	B	S	WR	DM*	B	F	65	OUT*	CT	60	CON	
Family	Sub	Product	Mounting	Dimension	Body	Diffuser	IP	Output	CCT	Beam	Control	
				15 152.4mm	A Aged Brass			331 331lm	27 2700K		NOT Included	
				24 241.3mm	B Black Matt			612 612lm	30 3000K		NMX DMX	
				15 152.4mm				598 598lm**	40 4000K		Ready**	
				24 241.3mm				110 1105lm**	RW RGBW**		NAL DALI	
				15 152.4mm				892 892lm***	TU Tunable		Ready	
				24 241.3mm				164 1647lm***	2700-4000K***			


pro

brass step

pro brass step is a solid cast brass step light that features two diffuser options, a louvered face for focused illumination and a frosted lens for a softer glow. Its durable polycarbonate lens enhances longevity, ensuring reliable performance in any environment



front view

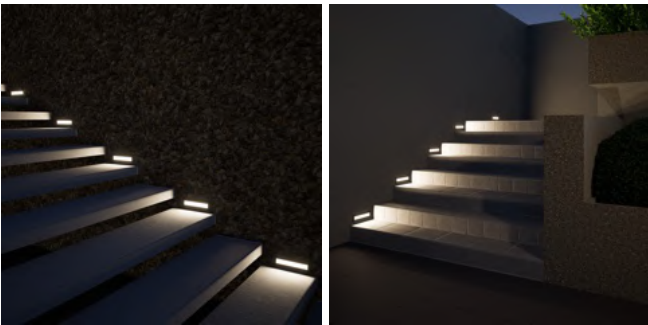

General Luminaire Data

Body Color		
	aged brass	matt black
Diffuser Color		
	frosted	
Body Material	Solid Cast Brass	
Diffuser Material	Polycarbonate	
Ingress Protection	65	
Lifetime	50,000hrs	

Electrical Characteristics


Voltage	12V 24V
Wattage	1.2 3.6W
Control	Not Included

Photometry & Performance

*available upon request

Light Source	LED SMD		
Delivered Output	030 090lm		
Luminaire Efficacy	25.1lm/W		
CRI	80		
CCT			
	2700K	3000K	4000K
			
	RGBW *	TW 2700K-4000K *	

Beam Angle



Accessories		Certifications & Standards
Included	Screws	CE
Sold Separately	Control Gear	RoHS
		LM80
		IEC61347

Product Code						*Parameters not interselectable . Each dimension to be matched with corresponding output					
P	B	S	WR	DM*	B	F	65	OUT*	CT	11	NOT
Family	Sub	Product	Mounting	Dimension	Body	Diffuser	IP	Output	CCT	Beam	Control
				15 152.4mm	A Aged Brass			030 030lm	27 2700K		
				24 241.3mm	B Black Matt			090 090lm	30 3000K		
									40 4000K		


pro

brass sub


pro brass sub is a solid cast brass LED underwater fixture offers exceptional durability and longevity. Ideal for large water features, waterfalls, cascades, or fountains, it is fully submersible and can also be installed in water splash zones for versatile and reliable lighting



front view



side view

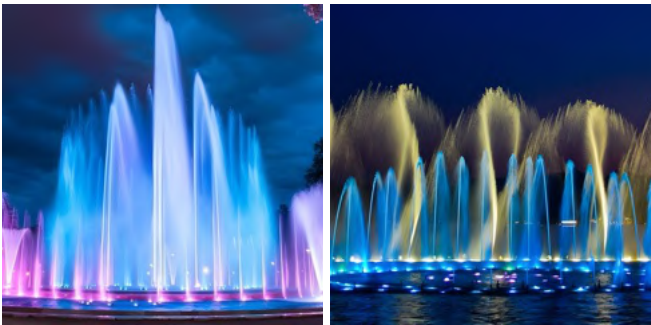

General Luminaire Data

Body Color	 aged brass
Diffuser Color	 transparent
Body Material	Solid Cast Brass
Diffuser Material	Glass
Ingress Protection	68
Lifetime	50,000hrs

Electrical Characteristics


Voltage	12V 24V
Wattage	11W
Control	Not Included NAL DALI Ready

Photometry & Performance

*available upon request

Light Source	LED SMD
Delivered Output	1199lm
Luminaire Efficacy	109lm/W
CRI	80
CCT	 2700K  3000K  4000K  RGBW*  TW 2700K-4000K*

Beam Angle



Accessories		Certifications & Standards
Included	Screws Brackets	CE RoHS
Sold Separately	Control Gear	LM80 IEC61347

Product Code											
P	B	S	FM	13	A	T	68	119	CT	40	CON
Family	Sub	Product	Mounting	Dimension	Body	Diffuser	IP	Output	CCT	Beam	Control
									27 2700K		NOT Included
									30 3000K		NAL DALI
									40 4000K		Ready



high performance strips

our high-performance strip lighting is thoughtfully designed for outdoor applications with a focus on higher efficacy. These LED strips have been specifically designed to accentuate the exterior architectural features of a space, seamlessly blending form and function for an exquisite outdoor lighting experience

this series features energy efficiency and durability, ensuring a long-lasting and eco-friendly solution for outdoor illumination needs



enhanced
aesthetic




uniform light
distribution



multiple CCTs



IP rating



high luminaire
efficacy



24V

practical and safe





i



pro

proof strip

pro proof strip is a linear LED strip featured with wide beam angle and multiple color temperatures and outputs. It is a high-efficacy strip enclosed in a waterproof silicone tube, making it fit to be installed in wet areas



top view

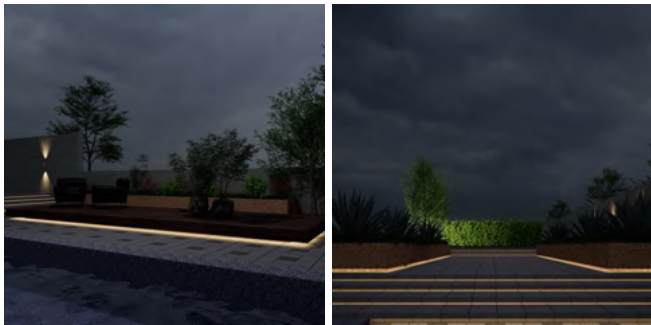

General Luminaire Data

Body Color	 white
Diffuser Color	 transparent
Body Material	Aluminum
Diffuser Material	Silicone
Ingress Protection	65
Lifetime	50,000hrs

*while data is provided per meter, this item is sold in rolls of 5 meters each


Electrical Characteristics

Voltage	24V
Wattage	5 10 15 20W
Control	Not Included NMX DMX Ready

Photometry & Performance

Light Source	LED SMD
Delivered Output	Single Color 750 1500 2250 3000lm RGB 500 1000 1500 2000lm RGBW 500 1000 1500 2000lm
Luminaire Efficacy	150lm/W RGB 100lm/W RGBW 100lm/W
CRI	95
CCT	   3000K 4000K 5000K    6500K RGB RGBW

Beam Angle



Wide Beam

Accessories

Included	3mm Adhesive Tape
Sold Separately	Control Gear
	Waterproof Connectors
	Clips
	Profile

* see details on page 365

Certifications & Standards

CE
RoHS
LM80
IEC61347

Product Code

Product Code											
Product Code						*For RGB variations only					
Product Code						**For RGBW variations only					
P	P	S	SM	12	W	T	65	OUT	CT	WB	CON
Family	Sub	Product	Mounting	Dimension	Body	Diffuser	IP	Output	CCT	Beam	Control
								050 50lm	27 2700K		NOT Included
								150 150lm	30 3000K		NMX DMX
								250 250lm	40 4000K		Ready*
								350 350lm	60 6000K		NMX DMX
								500 500lm*	RG RGB*		Ready**
								100 1000lm*	RW RGBW**		
								150 1500lm*			
								200 2000lm*			
								500 500lm**			
								100 1000lm**			
								150 1500lm**			
								200 2000lm**			

pro

linear rope

pro linear rope is a linear LED strip featured with wide beam angle and COB chips which ensures uniform lighting and is enclosed in a waterproof silicone tube making it fit for wet area installations



surface mounted



architectural outdoor



residential




commercial



landscape

top view



General Luminaire Data

Body Color



white

Diffuser Color



transparent

Body Material

Aluminum

Diffuser Material

Silicone

Ingress Protection

65

Lifetime

50,000hrs

*while data is provided per meter, this item is sold in rolls of 5 meters each

Electrical Characteristics

*For RGB and RGBW variations only

Voltage

24V

Wattage

10 | 18 *W

Control

Not Included | NMX DMX Ready *

Photometry & Performance

Light Source

LED COB

Delivered Output

Single Color 1100lm

RGB 1800lm

RGBW 1800lm

Luminaire Efficacy

110lm/W | RGB 100lm/W | RGBW 100lm/W

CRI

90

CCT



3000K



6500K




RGB



RGBW

Beam Angle



Wide Beam

Accessories

Included	3mm Adhesive Tape
Sold Separately	Control Gear
	Waterproof Connectors
	Clips
	Profile

* see details on page 365


Certifications & Standards

CE
RoHS
LM80
IEC61347

Product Code

P	L	R	SM	DM*	W	T	65	OUT*	CT	WB	CON
Family	Sub	Product	Mounting	Dimension	Body	Diffuser	IP	Output	CCT	Beam	Control
				10 10mm				110 1100lm	30 3000K		NOT Included
				14 14mm				180 1800lm**	60 6500K		NMX DMX
				14 14mm				180 1800lm***	RG RGB** RW RGBW***		Ready** NMX DMX Ready***


*Parameters not **interselectable**. Each dimension to be matched with corresponding output
For RGB variations only *For RGBW variations only

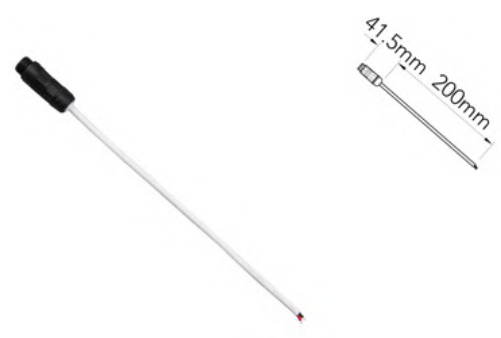

pro strip connector

pro strip connector is used as a male waterproof connector for high performance strip items
L 41.5mm PSCSM41WNNONOTNONONOT


Body Color ☐ White
Body Material Nylon + Silicone

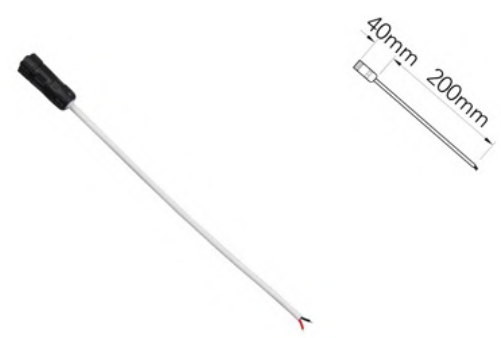

pro strip connector

pro strip connector is used as a female waterproof connector for high performance strip items
L 40mm PSCSM40WNNONOTNONONOT

Body Color ☐ White
Body Material Nylon + Silicone



pro strip clip

pro strip clip is used as a clip accessory used to support the high performance strip items on surface mounting installation
PSCSMNOWNNONOTNONONOT
*clips available on request

Body Color ☐ White
Body Material Silicone



i

pro

silicone cover

pro silicone cover is crafted from silicone material which serves as a protective housing for strip items. Its unique pure silicone material ensures a professional and clean finish, guaranteeing a polished appearance



surface mounted



architectural outdoor



residential






commercial



industrial

section view

side view



General Luminaire Data

Body Color



silver

Diffuser Color



opal

Body Material

Silicone

Diffuser Material

Silicone

Ingress Protection

65

Accessories

Included

End Caps

Sold Separately

Stainless Steel Clips

Certifications & Standards

CE

RoHS

LM80

IEC61347

Product Code

P

Family

S

Sub

C

Product

SM

Mounting

DM

Dimension

50 50mm

70 70mm

W

Body

O

Diffuser

65

IP

NOT

Output

NO

CCT

NO

Beam

NOT

Control

pro

silicone profile

pro silicone profile is a flexible stainless steel profile primarily utilized to secure the Pro Silicone Cover, enabling the creation of vibrant and captivating styles



surface mounted



architectural outdoor



residential







commercial



industrial

front view

side view

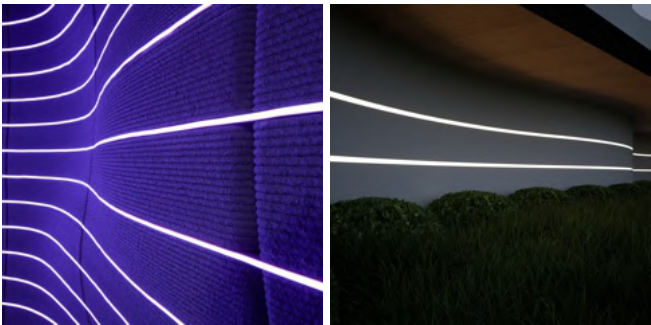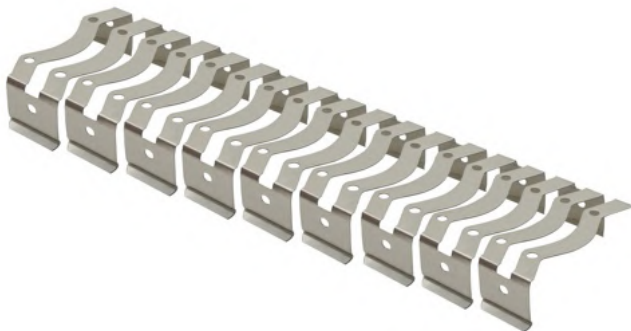

General Luminaire Data

Body Color



stainless steel

Body Material

Stainless Steel

Ingress Protection

65

Accessories

Sold Separately

- Screws
- Stainless Steel Clips

Certifications & Standards

- CE
- RoHS
- LM80
- IEC61347

Product Code

P	S	P	SM	DM	S	N	65	NOT	NO	NO	NOT
Family	Sub	Product	Mounting	Dimension	Body	Diffuser	IP	Output	CCT	Beam	Control
				51 51.93mm							
				72 72mm							

pro


silicone cover

pro silicone cover is crafted from silicone material which serves as a protective housing for strip items. Its unique pure silicone material ensures a professional and clean finish, guaranteeing a polished appearance



section view

side view

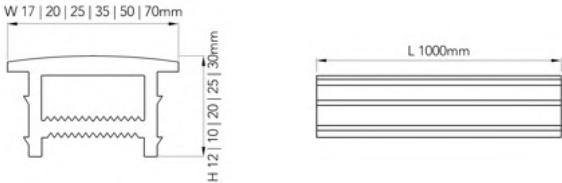

General Luminaire Data

Body Color



white

Diffuser Color



opal

Body Material

Silicone

Diffuser Material

Silicone

Ingress Protection

65

Accessories

Included

End Caps

Certifications & Standards

CE
RoHS
LM80
IEC61347

Product Code

P	S	C	CR	DM	W	O	65	NOT	NO	NO	NOT
Family	Sub	Product	Mounting	Dimension	Body	Diffuser	IP	Output	CCT	Beam	Control
				17 17mm							
				20 20mm							
				25 25mm							
				35 35mm							

tansy building

doha, qatar



architainment lighting

introducing our cutting-edge architainment lighting collections, meticulously designed to excel in both architectural and entertainment applications. These lighting elements are ideal for accentuating the exterior architectural beauty of any space

these collections also establish new standards in energy efficiency and sustainability, making them the optimal choice for transforming any vision into a vibrant reality



media façade

373



media façade

our diverse range of media façade lighting fixtures is expertly designed to cater to both architectural and entertainment needs. These systems play an important role in accentuating exterior architecture

the media façade family offers multiple variations and designs, providing flexibility in selecting the perfect lighting element for unique projects, offering stunning visuals that seamlessly harmonize form and function



enhanced
aesthetic




uniform light
distribution



multiple CCTs



dmx control
function



high luminaire
efficacy




RGBW





pro color bar

pro color bar is a linear LED pixel rigid bar ideal for architainment façade applications. Its ability to control single LED dots, allows it to offer highly dynamic media façades

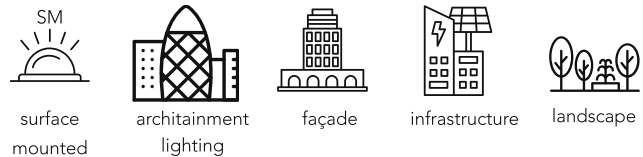

side view

side view

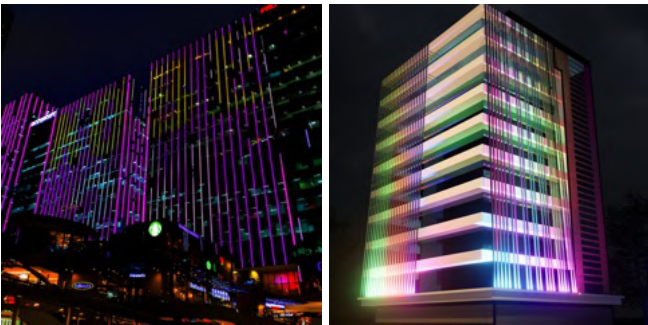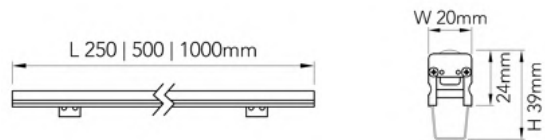

General Luminaire Data

*available upon request

Body Color



Diffuser Color



Body Material	Aluminum
Diffuser Material	Tempered Glass
Ingress Protection	65
Lifetime	50,000hrs

Electrical Characteristics


*available upon request

Voltage	24V 48V *
Wattage	Single Color 3 6 12 15W RGB 3 6 12 15W RGBW 4 7.5 15W Tunable White 3 4 6 7.5 12 15W
Control	Not Included NMX DMX Ready

Photometry & Performance

Light Source	LED SMD
Delivered Output	Single Color 270 540 1080 1350lm RGB 60 120 240 300lm RGBW 80 150 300lm Tunable White 120 160 240 300 480 600lm
Luminaire Efficacy	90lm/W RGB 20lm/W RGBW 20lm/W TW 40lm/W
CRI	90
CCT	2700K 3000K 4000K 5000K 5700K 6000K 6500K RGB RGBW TW 1800-6500K

Beam Angle



Accessories

Included	Bracket
Sold Separately	Control Gear
	Anti-glare Cover
	Fin
	Profile
	Stainless Steel Chain

* see details on page 379

Certifications & Standards

CE
RoHS
LM80
IEC61347

Product Code


*Parameters not **interselectable**. Each dimension to be matched with corresponding output
For RGB variations only *For RGBW variations only ****For Tunable White variations only

P	C	B	SM	DM*	G	O	65	OUT*	CT	12	CON
Family	Sub	Product	Mounting	Dimension	Body	Diffuser	IP	Output	CCT	Beam	Control
				25 250mm				270 270lm	27 2700K		NOT Included
				50 500mm				540 540lm	30 3000K		NMX DMX
				10 1000mm				108 1080lm	40 4000K		Ready**
				10 1000mm				135 1350lm	50 5000K		NMX DMX
				25 250mm				060 060lm**	57 5700K		Ready***
				50 500mm				120 120lm**	60 6000K		
				10 1000mm				240 240lm**	65 6500K		
				10 1000mm				300 300lm**	RG RGB**		
				25 250mm				080 080lm***	RW RGBW***		
				50 500mm				150 150lm***	TU Tunable		
				10 1000mm				300 300lm***	1800-6500K****		
				25 250mm				120 120lm****			
				25 250mm				160 160lm****			
				50 500mm				240 240lm****			
				50 500mm				300 300lm****			
				10 1000mm				480 480lm***			
				10 1000mm				600 600lm***			



pro color cover
pro color cover is an anti-glare cover used to cover light source and to help direct light to desired angle
W 20mm PCCSM20GNNONOTNONONOT

Body Color  Grey
Body Material Aluminum

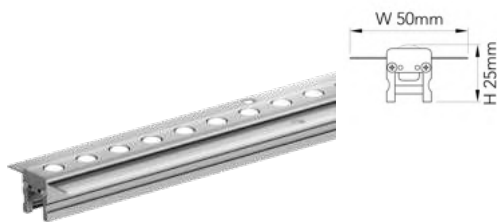

pro color trim
pro color trim is an accessory used to make pro color bar available for recessed installation
W 50mm PCTSRCT50GNNONOTNONONOT

Body Color  Grey
Body Material Aluminum



pro color profile
pro color profile acts as protective housing for pro color bar and is while giving a professional and clean finish
W 50mm PCPIR50GNNONOTNONONOT

Body Color  Grey
Body Material Aluminum




pro color chain
pro color chain is an anti-fall chain accessory used to prevents the bracket from falling and secures pro color bar to reduce drop risk
PCCSMNOSNNONOTNONONOT
*stainless steel chain available on request

Body Color  Stainless Steel
Body Material Stainless Steel

i



pro color bar

pro color bar is a linear LED pixel rigid bar ideal for architainment façade applications. Its ability to control single LED dots, allows it to offer highly dynamic media façades

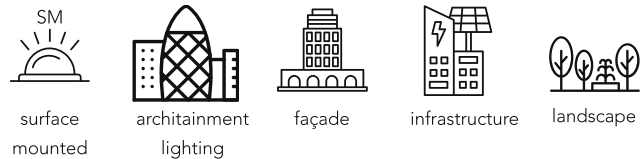

side view

side view

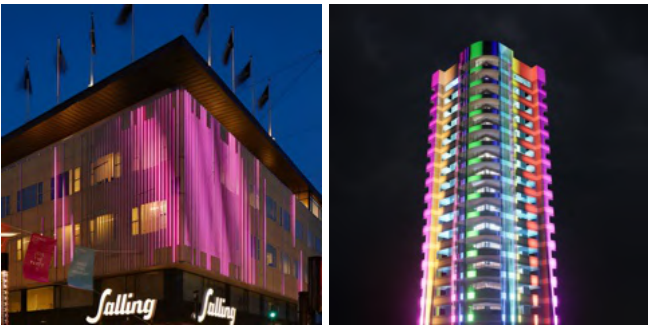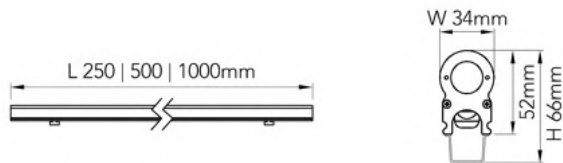

General Luminaire Data

*available upon request

Body Color



Diffuser Color



Body Material	Aluminum
Diffuser Material	Polycarbonate
Ingress Protection	65
Lifetime	50,000hrs

Electrical Characteristics


*available upon request

Voltage	24V 48V *
Wattage	3 4 6 7.5 12 15W
Control	Not Included NMX DMX Ready

Photometry & Performance

Light Source	LED SMD
Delivered Output	Single Color 270 360 540 675 1080 1350lm RGB 60 80 120 150 240 300lm RGBW 60 80 120 150 240 300lm Tunable White 120 160 240 300 480 600lm
Luminaire Efficacy	90lm/W RGB 20lm/W RGBW 20lm/W TW 40lm/W
CRI	90
CCT	2700K 3000K 4000K 5000K 5700K 6000K 6500K RGB RGBW TW 1800-6500K

Beam Angle



Accessories

Included	Bracket
Sold Separately	Control Gear
	Fin
	Profile
	Stainless Steel Chain

* see details on page 383


Certifications & Standards

CE
RoHS
LM80
IEC61347

Product Code

*Parameters not **interselectable**. Each dimension to be matched with corresponding output
For RGB variations only *For RGBW variations only ****For Tunable White variations only

P	C	B	SM	DM*	G	O	65	OUT*	CT	18	CON
Family	Sub	Product	Mounting	Dimension	Body	Diffuser	IP	Output	CCT	Beam	Control
				25 250mm				270 270lm	27 2700K		NOT Included
				25 250mm				360 360lm	30 3000K		NMX DMX
				50 500mm				540 540lm	40 4000K		Ready**
				50 500mm				675 675lm	50 5000K		NMX DMX
				10 1000mm				108 1080lm	57 5700K		Ready***
				10 1000mm				135 1350lm	60 6000K		
				25 250mm				060 060lm**	65 6500K		
				25 250mm				080 080lm**	RG RGB**		
				50 500mm				120 120lm**	RW RGBW***		
				50 500mm				150 150lm**	TU Tunable		
				10 1000mm				240 240lm**	1800-6500K****		
				10 1000mm				300 300lm**			
				25 250mm				060 060lm***			
				25 250mm				080 080lm***			
				50 500mm				120 120lm***			
				50 500mm				150 150lm***			
				10 1000mm				240 240lm***			
				10 1000mm				300 300lm***			
				25 250mm				120 120lm****			
				25 250mm				160 160lm****			
				50 500mm				240 240lm****			
				50 500mm				300 300lm****			
				10 1000mm				480 480lm****			
				10 1000mm				600 600lm****			

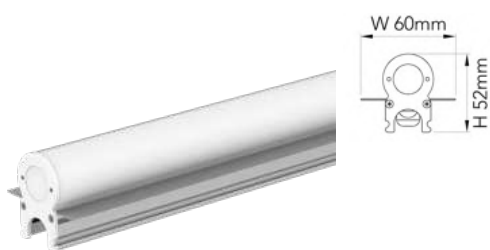


pro color trim

pro color trim is a accessory used to make pro color bar available for recessed installation

W 50mm PCTCT50GNNONOTNONONOT

Body Color  Grey
Body Material Aluminum

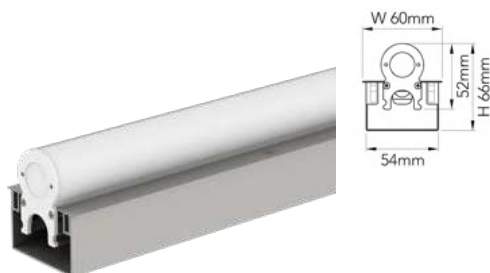

pro color profile

pro color profile acts as protective housing for pro color bar and is while giving a professional and clean finish

W 50mm PCPIR50GNNONOTNONONOT

Body Color  Grey
Body Material Aluminum



pro color chain

pro color chain is an anti-fall chain accessory used to prevents the bracket from falling and secures pro color bar to reduce drop risk

PCCSMNOSNNONOTNONONOT

*stainless steel chain available on request

Body Color  Stainless Steel
Body Material Stainless Steel



i

pro

top line

pro top line is ideal for highlighting features of the building thanks to its flexible form that can be seamlessly positioned into either linear or curved shapes. It is a top bending flexible line item that comes in various outputs and color temperatures



surface mounted



architrave lighting



façade




infrastructure





landscape



section view



side view



General Luminaire Data

Body Color



white

Diffuser Color



frosted

Body Material

Silicone

Diffuser Material

Silicone

Ingress Protection

67

Lifetime

50,000hrs

Electrical Characteristics

*available upon request

Voltage

24V | 48V *

Wattage

5 | 10 | 15 | 16 | 20 | 24W

Control

Not Included | NMX DMX Ready

Photometry & Performance

*available upon request

Light Source

LED SMD

Delivered Output

Single Color 400 | 800 | 1200 | 1280 | 1600 | 1920lm

RGB 145 | 290 | 435 | 464 | 580 | 696lm

RGBW 190 | 380 | 570 | 608 | 760 | 912lm

Tunable White 315 | 630 | 945 | 1008 | 1260 | 1512lm

Luminaire Efficacy

80lm/W | RGB 29lm/W | RGBW 38lm/W |

TW 63lm/W

CRI

90

CCT



2700K



3000K



3500K



4000K



5000K



6000K



RGB



RGBW




Tunable 2200-6000K Color *



Single Color *

Beam Angle



120°

Accessories

Sold Separately	Control Gear
	Waterproof Connector
	Mounting Clips
	End Caps
	Profile

* see details on page 391

Certifications & Standards

CE
RoHS
LM80
IEC61347

Product Code

*Parameters not **interselectable**. Each dimension to be matched with corresponding output
For RGB variations only *For RGBW variations only ****For Tunable White variations only

P	T	L	SM	DM*	W	F	67	OUT*	CT	12	CON
Family	Sub	Product	Mounting	Dimension	Body	Diffuser	IP	Output	CCT	Beam	Control
				12 12mm				400 400lm	27 2700K		NOT Included
				12 12mm				800 800lm	30 3000K		NMX DMX
				16 16mm				400 400lm	35 3500K		Ready**
				16 16mm				800 800lm	40 4000K		NMX DMX
				16 16mm				120 1200lm	50 5000K		Ready***
				30 30mm				128 1280lm	60 6000K		
				30 30mm				160 1600lm	RG RGB**		
				30 30mm				192 1920lm	RW RGBW***		
				12 12mm				145 145lm**	TU Tunable		
				12 12mm				290 290lm**	2200-6000K****		
				16 16mm				145 145lm**			
				16 16mm				290 290lm**			
				16 16mm				435 435lm**			
				30 30mm				464 464lm**			
				30 30mm				580 580lm**			
				30 30mm				696 696lm**			
				16 16mm				190 190lm***			
				16 16mm				380 380lm***			
				16 16mm				570 570lm***			
				30 30mm				608 608m***			
				30 30mm				760 760lm***			
				30 30mm				912 912lm***			
				12 12mm				315 315lm****			
				12 12mm				630 630lm****			
				16 16mm				315 315lm****			
				16 16mm				630 630lm****			
				16 16mm				945 945lm****			
				30 30mm				100 1008lm****			
				30 30mm				126 1260lm****			
				30 30mm				151 1512lm****			

pro

side line

pro side line is ideal for highlighting features of the building thanks to its flexible form that can be seamlessly positioned into either linear or curved shapes. It is a side bending flexible line item that comes in various outputs and color temperatures



surface mounted



architainment lighting



façade




infrastructure





landscape



section view



side view



General Luminaire Data

Body Color



white

Diffuser Color



frosted

Body Material

Silicone

Diffuser Material

Silicone

Ingress Protection

67

Lifetime

50,000hrs

Electrical Characteristics

*available upon request

Voltage

24V | 48V *

Wattage

5 | 10 | 15W

Control

Not Included | NMX DMX Ready

Photometry & Performance

*available upon request

Light Source

LED SMD

Delivered Output

Single Color 400 | 800 | 1200lm

RGB 185 | 370 | 555lm

RGBW 270 | 540 | 810lm

Tunable White 320 | 640 | 960lm

Luminaire Efficacy

80lm/W | RGB 37lm/W | RGBW 54lm/W |

TW 64lm/W

CRI

90

CCT



2700K



3000K



3500K



4000K



5000K



6000K



RGB



RGBW




Tunable



Single

2200-6000K Color *

Beam Angle



120°

Accessories

Sold Separately	Control Gear
	Waterproof Connector
	Mounting Clips
	End Caps
	Profile

* see details on page 391

Certifications & Standards

CE
RoHS
LM80
IEC61347

Product Code

*For RGB variations only **For RGBW variations only ***For Tunable White variations only

P	S	L	SM	DM	W	F	67	OUT	CT	12	CON
Family	Sub	Product	Mounting	Dimension	Body	Diffuser	IP	Output	CCT	Beam	Control
				10 10mm				400 400lm	27 2700K		NOT Included
				12 12mm				800 800lm	30 3000K		NMX DMX
				16 16mm				120 1200lm	35 3500K		Ready*
								185 185lm*	40 4000K		NMX DMX
								370 370lm*	50 5000K		Ready**
								555 555lm*	60 6000K		
								270 270lm**	RG RGB*		
								540 540lm**	RW RGBW**		
								810 810lm**	TU Tunable		
								320 320lm***	2200-6000K***		
								640 640lm***			
								960 960lm***			

pro flex line

pro flex line is ideal for highlighting features of the building thanks to its flexible form that can be seamlessly positioned into either linear or curved shapes. It is a 3D bending flexible line item that comes in various outputs and color temperatures



surface
mounted



architainment
lighting



façade




infrastructure





landscape



section view



side view



General Luminaire Data

Body Color



white

Diffuser Color



frosted

Body Material

Silicone

Diffuser Material

Silicone

Ingress Protection

67

Lifetime

50,000hrs

Electrical Characteristics

*available upon request

Voltage

24V | 48V *

Wattage

Single Color 5 | 6 | 10 | 20W

RGB 5 | 10W

RGBW 5 | 10 | 15W

Tunable White 5 | 10W

Control

Not Included | NMX DMX Ready

Photometry & Performance

*available upon request

Light Source

LED SMD

Delivered Output

Single Color 400 | 480 | 800 | 1600lm

RGB 110 | 220lm

RGBW 150 | 300 | 450lm

Tunable White 295 | 590lm

Luminaire Efficacy

80lm/W | RGB 22lm/W | RGBW 30lm/W |

TW 59lm/W

CRI

90

CCT



2700K



3000K



3500K



4000K



5000K



6000K



RGB



RGBW




Tunable
2200-6000K Color *



Single
2200-6000K Color *

Beam Angle



120°

Accessories

Sold Separately	Control Gear
	Waterproof Connector
	Mounting Clips
	End Caps
	Profile

* see details on page 391


Certifications & Standards

CE
RoHS
LM80
IEC61347

Product Code

*Parameters not **interselectable**. Each dimension to be matched with corresponding output
For RGB variations only *For RGBW variations only ****For Tunable White variations only

P	F	L	SM	DM*	W	F	67	OUT*	CT	12	CON
Family	Sub	Product	Mounting	Dimension	Body	Diffuser	IP	Output	CCT	Beam	Control
				08 08mm				480 480lm	27 2700K		NOT Included
				10 10mm				800 800lm	30 3000K		NMX DMX
				15 15mm				400 400lm	35 3500K		Ready**
				15 15mm				800 800lm	40 4000K		NMX DMX
				17 17mm				400 400lm	50 5000K		Ready***
				17 17mm				800 800lm	60 6000K		
				20 20mm				160 1600lm	RG RGB**		
				15 15mm				110 110lm**	RW RGBW***		
				15 15mm				220 220lm**	TU Tunable		
				17 17mm				110 110lm**	2200-6000K****		
				17 17mm				220 220lm**			
				17 17mm				150 150lm***			
				17 17mm				300 300lm***			
				17 17mm				450 450lm***			
				15 15mm				295 295lm****			
				15 15mm				590 590lm****			
				17 17mm				295 295lm****			
				17 17mm				590 590lm****			

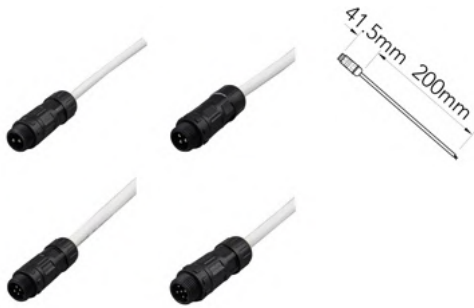


pro flex connector

pro flex connector is a male waterproof connector for flexible line items

L 41.5mm PFCSM41WNNONOTNONONOT

Body Color ☐ White
Body Material Nylon + Silicone

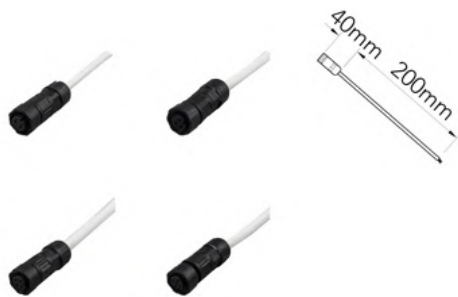

pro flex connector

pro flex connector is a female waterproof connector for flexible line items

L 40mm PFCSM40WNNONOTNONONOT

Body Color ☐ White
Body Material Nylon + Silicone



pro flex feeder

pro flex feeder is a waterproof connector that acts as an additional connection to the driver

L 200mm PFFSM20WNNONOTNONONOT

Body Color ☐ White
Body Material Silicone



pro flex cap

pro flex cap is an end cap accessory for flexible line items, used when attaching the cap to the flexible line item with glue

PFCSMNOWNNONOTNONONOT
*sizes available upon request

Body Color ☐ White
Body Material Silicone

**pro flex clip**

pro flex clip is a stainless steel mounting clip used to fix flexible line items into desired location

PFCSMNOSNNONOTNONONOT

*sizes available upon request

Body Color  Stainless Steel

Body Material Stainless Steel

pro



linear profile

pro linear profile is an aluminum profile that acts as protective housing for flex lines while giving a professional and clean finish. This offers the light installation a professionally fitted appearance thanks to its slim shape



front view

side view



General Luminaire Data

Body Color



aluminum

Body Material

Aluminum

Ingress Protection

40

Accessories

Sold Separately

Clips

Certifications & Standards

CE
RoHS
LM80
IEC61347

Product Code

P	L	P	SM	16	A	N	40	NOT	NO	NO	NOT
Family	Sub	Product	Mounting	Dimension	Body	Reflector	IP	Output	CCT	Beam	Control

pro flex profile

pro flex profile is a flexible stainless steel profile that acts as protective housing for flex lines while giving a professional and clean finish. This offers the installation a professionally fitted appearance thanks to its slim shape



surface
mounted



architainment
lighting



residential





commercial



industrial

side view

side view

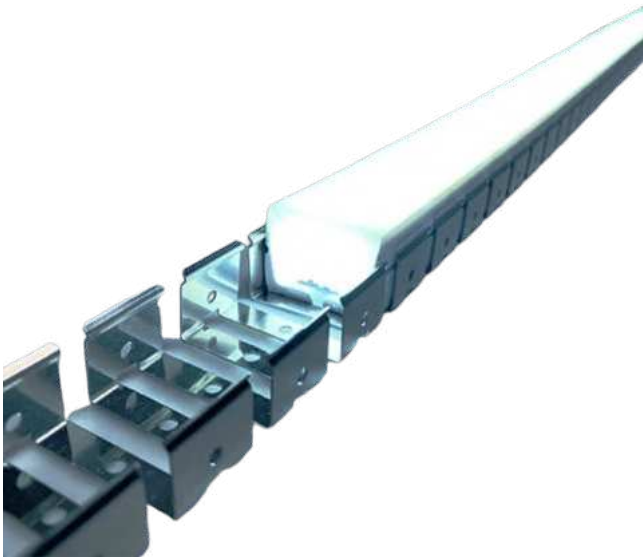

General Luminaire Data

Body Color



aluminum

Body Material

Stainless Steel

Ingress Protection

40

Accessories

Sold Separately

Clips

Certifications & Standards

CE
RoHS
LM80
IEC61347

Product Code

P

Family

F

Sub

P

Product

SM

Mounting

16

Dimension

A

Body

N

Reflector

40

IP

NOT

Output

NO

CCT

NO

Beam

NOT

Control

pro

flex rope

pro flex rope is a 360° flexible linear item which is ideal in highlighting architectural features thanks to its flexible form that can be seamlessly positioned into either linear or curved spaces. It can be arranged in multiple styles with the use of proper mounting accessories



surface mounted



architainment lighting



façade



infrastructure




landscape



section view



side view



General Luminaire Data

Body Color



white

Diffuser Color



opal

Body Material

Silicone

Diffuser Material

Silicone

Ingress Protection

65

Lifetime

50,000hrs

Electrical Characteristics

Voltage

24V

Wattage

Single Color 14W

RGB 14W

RGBW 22W

Tunable White 14W

Control

Not Included | NMX DMX Ready

Photometry & Performance

Light Source

LED SMD

Delivered Output

Single Color 1022lm

RGB 476lm

RGBW 924lm

Tunable White 924lm

Luminaire Efficacy

73lm/W | RGB 34lm/W | RGBW 42lm/W |

TW 66lm/W

CRI

90

CCT



2700K

3000K

4000K

5000K



RGB




RGBW



Tunable
2200-6000K

Beam Angle



360°

Accessories

Sold Separately	Control Gear
	Suspension Kit Accessory
	Vertical Pendant Accessory
	Vertical Surface Mounted Accessory
	Connector

* see details on page 397

Certifications & Standards

CE
RoHS
LM80
IEC61347

Product Code

P	F	R	SM	25	W	O	65	OUT	CT	36	CON
Family	Sub	Product	Mounting	Dimension	Body	Diffuser	IP	Output	CCT	Beam	Control
								102 1022lm	27 2700K		NOT Included
								476 476lm*	30 3000K		NMX DMX
								924 924lm**	40 4000K		Ready*
								924 924lm***	50 5000K		NMX DMX
									RG RGB*		Ready**
									RW RGBW**		
									TU Tunable		
									2200-6000K***		



pro rope suspension

pro rope suspension is a suspension kit accessory suitable for pro flex rope items

PRSSMNOSNNONOTNONONOT

*sizes available upon request

Body Color  Stainless Steel

Body Material Steel



pro rope holder

pro rope holder is a vertical pendant accessory kit that supports pro flex rope suspended installations

PRHSMNOSNNONOTNONONOT

*sizes available upon request

Body Color  Stainless Steel

Body Material Steel



pro rope base

pro rope base is a vertical surface-mounted kit used to support the pro flex rope items in ceiling mounted installations

PRBSMNOSNNONOTNONONOT

*sizes available upon request

Body Color  Silver

Body Material Aluminum



pro rope connector

pro rope connector is an accessory used to connect pro flex rope items together

PRCSMNOTNNONOTNONONOT

*sizes available upon request

Body Color  Transparent

Body Material Polycarbonate









pro

dome pixel

pro dome pixel is a half-sphere-shaped LED light that is small in size and light in weight, making it ideal for creating patterns and highlighting architectural elements. It is also available in multiple color temperatures and is replaceable one by one

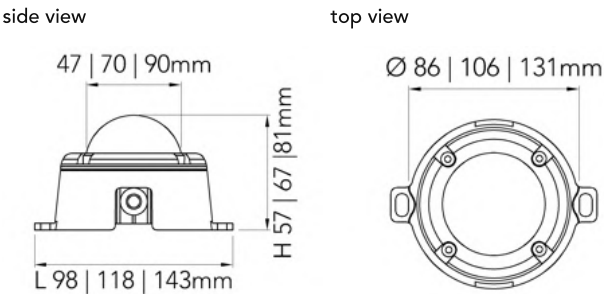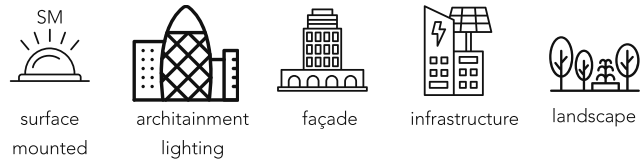

General Luminaire Data

Body Color	greyany other RAL colors *
Diffuser Color	transparent
Body Material	Aluminum
Diffuser Material	Polycarbonate
Ingress Protection	66
Lifetime	50,000hrs


Electrical Characteristics

*available upon request	
Voltage	24V 48V *
Wattage	Single Color 3 6 9W RGB 3 6 9W RGBW 5 10 15W Tunable White 3 6 9W
Control	Not Included NMX DMX Ready NAL DALI Ready SPI

Photometry & Performance

Light Source	LED SMD
Delivered Output	Single Color 150 300 450lm RGB 90 180 270lm RGBW 150 300 450lm Tunable White 120 240 360lm
Luminaire Efficacy	50lm/W RGB 30lm/W RGBW 30lm/W TW 40lm/W
CRI	90
CCT	2700K3000K4000K5000K5700K 6000K6500KRGBRGBWTW1800-6500K

Beam Angle





Accessories			Certifications & Standards
Included	Rubber Wire		CE
Sold Separately	Control Gear		RoHS
			LM80
			IEC61347

Product Code											*Parameters not interselectable . Each dimension to be matched with corresponding output
											For RGB variations only *For RGBW variations only ****For Tunable White variations only
P	D	P	SM	DM*	G	T	66	OUT*	CT	10	CON
Family	Sub	Product	Mounting	Dimension	Body	Diffuser	IP	Output	CCT	Beam	Control
				86 86mm				150 150lm	27 2700K		NOT Included
				10 106mm				300 300lm	30 3000K		NMX DMX
				13 131mm				450 450lm	40 4000K		Ready**
				86 86mm				090 090lm**	50 5000K		NMX DMX
				10 106mm				180 180lm**	57 5700K		Ready***
				13 131mm				270 270lm**	60 6000K		NAL DALI
				86 86mm				150 150lm***	65 6500K		Ready
				10 106mm				300 300lm***	RG RGB**		SPI
				13 131mm				450 450lm***	RW RGBW***		
				86 86mm				120 120lm****	TU Tunable		
				10 106mm				240 240lm****	1800-6500K****		
				13 131mm				360 360lm****			

pro dome pixel

pro dome pixel is a half-sphere-shaped LED light that is small in size and light in weight, making it ideal for creating patterns and highlighting architectural elements. It is also available in multiple color temperatures and is replaceable one by one

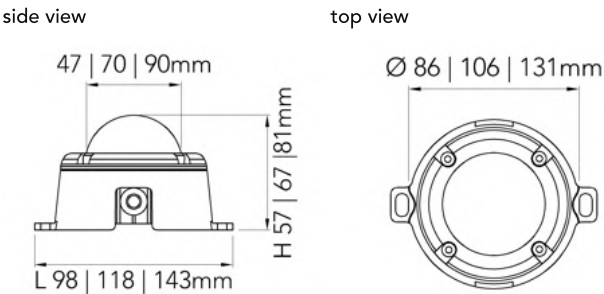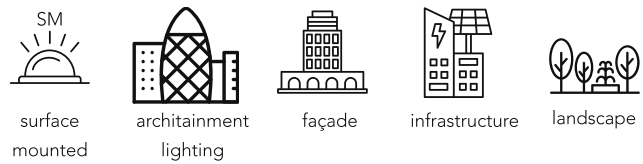

General Luminaire Data

Body Color	greyany otherRAL colors *
Diffuser Color	opal
Body Material	Aluminum
Diffuser Material	Polycarbonate
Ingress Protection	66
Lifetime	50,000hrs

Electrical Characteristics


*available upon request

Voltage	24V 48V *
Wattage	Single Color 3 6 9W RGB 3 6 9W RGBW 5 10 15W Tunable White 3 6 9W
Control	Not Included NMX DMX Ready SPI NAL DALI Ready

Photometry & Performance

Light Source	LED SMD
Delivered Output	Single Color 150 300 450lm RGB 90 180 270lm RGBW 150 300 450lm Tunable White 120 240 360lm
Luminaire Efficacy	50lm/W RGB 30lm/W RGBW 30lm/W TW 40lm/W
CRI	90
CCT	2700K3000K4000K5000K5700K 6000K6500KRGBRGBWTW1800-6500K

Beam Angle






Accessories		Certifications & Standards
Included	Rubber Wire	CE
Sold Separately	Control Gear	RoHS
		LM80
		IEC61347

Product Code											*Parameters not interselectable . Each dimension to be matched with corresponding output
											For RGB variations only *For RGBW variations only ****For Tunable White variations only
P	D	P	SM	DM*	G	O	66	OUT*	CT	14	CON
Family	Sub	Product	Mounting	Dimension	Body	Diffuser	IP	Output	CCT	Beam	Control
				86 86mm				150 150lm	27 2700K		NOT Included
				10 106mm				300 300lm	30 3000K		NMX DMX
				13 131mm				450 450lm	40 4000K		Ready**
				86 86mm				090 090lm**	50 5000K		NMX DMX
				10 106mm				180 180lm**	57 5700K		Ready***
				13 131mm				270 270lm**	60 6000K		SPI SPI
				86 86mm				150 150lm***	65 6500K		NAL DALI
				10 106mm				300 300lm***	RG RGB**		Ready
				13 131mm				450 450lm***	RW RGBW***		
				86 86mm				120 120lm****	TU Tunable		
				10 106mm				240 240lm****	1800-6500K****		
				13 131mm				360 360lm****			

pro

color pixel

pro color pixel is small in size and light in weight, making it convenient for any arrangement and design. It is available in an RGBW variation, ideal for creating patterns, usually in façades, and is replaceable one by one

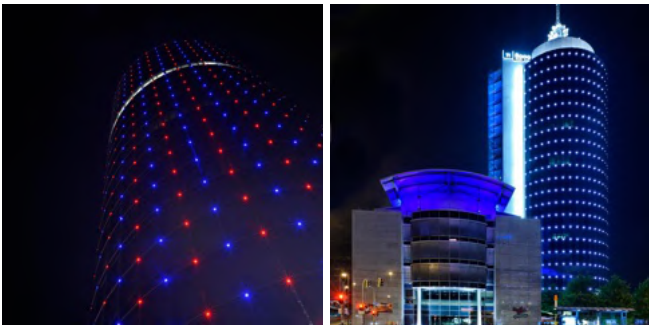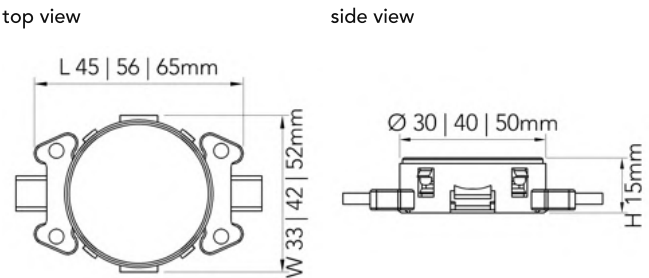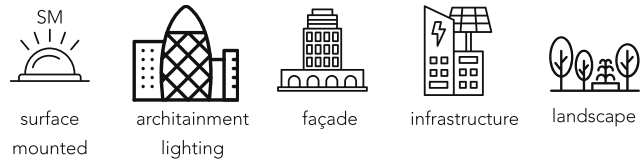

General Luminaire Data

Body Color	matt black grey
Diffuser Color	transparent
Body Material	ABS
Diffuser Material	Polycarbonate
Ingress Protection	66
Lifetime	50,000hrs


Electrical Characteristics

*for 12V variations only ; **available upon request	
Voltage	12V * 24V 48V **
Wattage	Single Color 0.72* 1.44W RGB 0.72* 1.44W RGBW 0.96* 1.96 2.4W
Control	NOT Included NMX DMX Ready SPI

Photometry & Performance

Light Source	LED SMD
Delivered Output	Single Color 3.13 6.26lm RGB 1.15 2.30lm RGBW 1.63 3.33 4.08lm
Luminaire Efficacy	4.35lm/W RGB 1.60lm/W RGBW 1.70lm/W
CRI	90
CCT	2700K 3000K 4000K 5000K 5700K 6000K 6500K RGB RGBW

Beam Angle




Accessories

- Sold Separately
- Control Gear

Aluminum Profile

Steel Wire Buckle

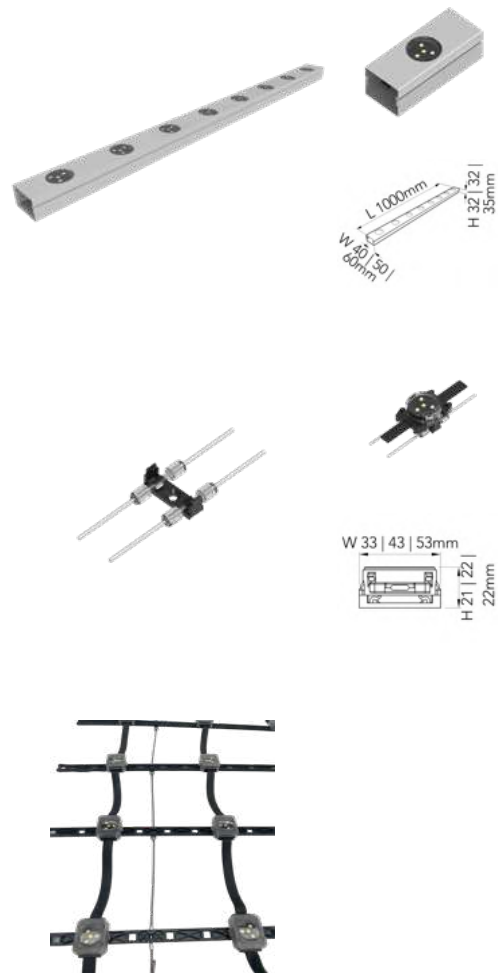

Certifications & Standards

CE
RoHS
LM80
IEC61347

pro pixel profile

pro pixel profile is an aluminum profile that acts as protective housing for color pixels while giving a professional and clean finish

W 40mm PPCSM40ANNONOTNONONOT
W 50mm PPCSM50ANNONOTNONONOT
W 60mm PPCSM60ANNONOTNONONOT

Body Color  Aluminum
Body Material Aluminum

pro pixel connector

pro pixel connector is a steel wire buckle accessory used to secure fastening of pro color pixel on bridge installations

W 33mm PCBSM33SNNONOTNONONOT
W 43mm PCBSM43SNNONOTNONONOT
W 53mm PCBSM53SNNONOTNONONOT

Body Color  Stainless Steel
Body Material Steel

pro pixel connector

pro pixel connector is a steel wire buckle accessory used to secure fastening of pro color pixel on bridge installations

PPCSMNOSNNONOTNONONOT
*stainless steel chain available on request

Body Color  Stainless Steel
Body Material Steel

Product Code




P	C	P	SM	DM*	B	T	66	OUT*	CT	10	CON
Family	Sub	Product	Mounting	Dimension	Body	Diffuser	IP	Output	CCT	Beam	Control
				30 30mm	B Black Matt			3.1 3.13lm	27 2700K		NOT Included
				40 40mm	G Grey			6.2 6.26lm	30 3000K		NMX DMX
				50 50mm				6.2 6.26lm	40 4000K		Ready**
				30 30mm				1.1 1.15lm**	50 5000K		NMX DMX
				40 40mm				2.3 2.30lm**	57 5700K		Ready***
				50 50mm				2.3 2.30lm**	60 6000K		SPI SPI
				30 30mm				1.6 1.63lm***	65 6500K		
				40 40mm				3.3 3.33lm***	RG RGB**		
				50 50mm				4.0 4.08lm***	RW RGBW***		

*Parameters not **interselectable**. Each dimension to be matched with corresponding output
For RGB variations only *For RGBW variations only

pro

color pixel

pro color pixel is small in size and light in weight, making it convenient for any arrangement and design. It is available in an RGBW variation, ideal for creating patterns, usually in façades, and is replaceable one by one

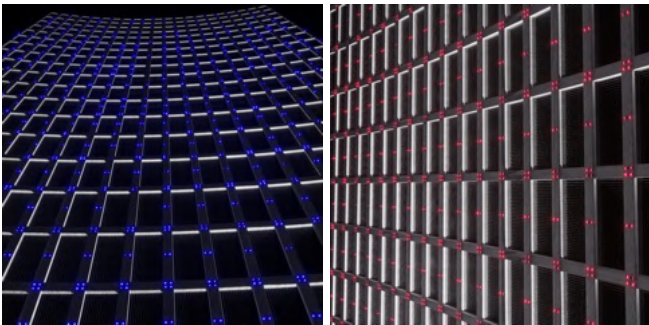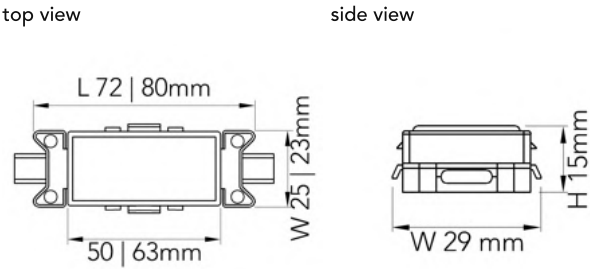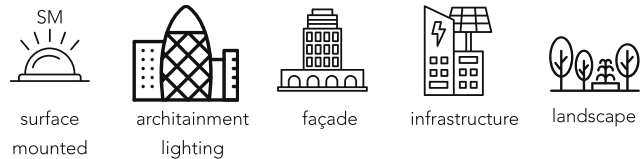

General Luminaire Data

Body Color	matt black grey
Diffuser Color	transparent
Body Material	ABS
Diffuser Material	Polycarbonate
Ingress Protection	66
Lifetime	50,000hrs


Photometry & Performance

Light Source	LED SMD
Delivered Output	Single Color 6.26lm RGB 2.30lm RGBW 3.33lm
Luminaire Efficacy	4.35lm/W RGB 1.60 lm/W RGBW 1.70lm/W
CRI	90
CCT	2700K 3000K 4000K 5000K 5700K 6000K 6500K RGB RGBW

Electrical Characteristics

*available upon request	
Voltage	24V 48V *
Wattage	Single Color 1.44W RGB 1.44W RGBW 1.96W
Control	NOT Included NMX DMX Ready SPI

Beam Angle




Accessories

- Sold Separately
- Control Gear

Aluminum Profile

Steel Wire Buckle

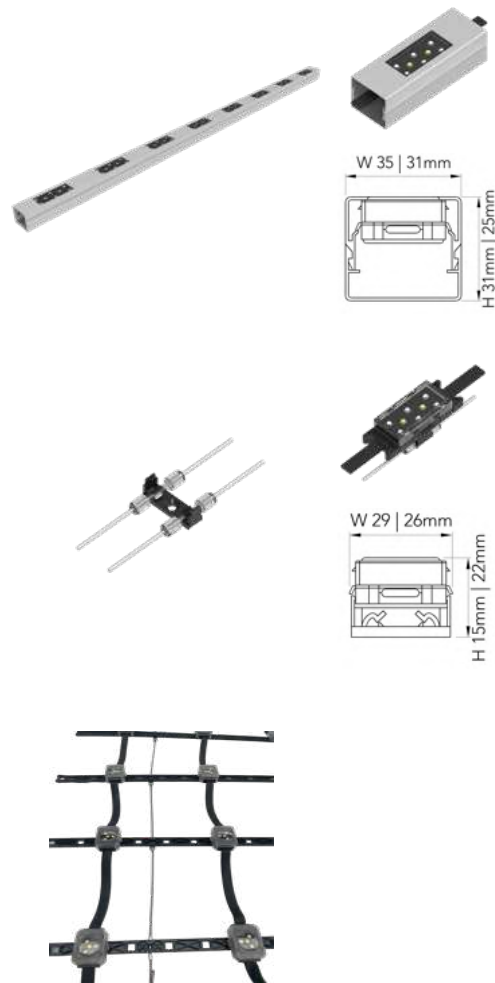

Certifications & Standards

CE
RoHS
LM80
IEC61347

pro pixel profile

pro pixel profile is an aluminum profile that acts as protective housing for color pixels while giving a professional and clean finish
W 31mm PPCSM31ANNONOTNONONOT
W 35mm PPCSM35ANNONOTNONONOT

Body Color  Aluminum
Body Material Aluminum

pro pixel connector

pro pixel connector is a steel wire buckle accessory used to secure fastening of pro color pixel on bridge installations
W 26mm PCBSM26SNNONOTNONONOT
W 29mm PCBSM29SNNONOTNONONOT

Body Color  Stainless Steel
Body Material Steel

pro pixel connector

pro pixel connector is a steel wire buckle accessory used to secure fastening of pro color pixel on bridge installations
PPCSMNOSNNONOTNONONOT
*stainless steel chain available on request

Body Color  Stainless Steel
Body Material Steel

Product Code

*For RGB variations only **For RGBW variations only

P	C	P	SM	DM	B	T	66	OUT	CT	10	CON
Family	Sub	Product	Mounting	Dimension	Body	Diffuser	IP	Output	CCT	Beam	Control
				72 72mm	B Black Matt			6.2 6.26lm	27 2700K		NOT Included
				80 80mm	G Grey			2.3 2.30lm*	30 3000K		NMX DMX
								3.3 3.33lm**	40 4000K		Ready**
									50 5000K		NMX DMX
									57 5700K		Ready***
									60 6000K		SPI SPI
									65 6500K		
									RG RGB*		
									RW RGBW**		

pro

acc slave

i

pro acc slave is a slave controller that transmits data over Ethernet, receiving input from a master controller or computer via NET1 and outputting through NET2. It features eight output ports, supports up to 8,192 pixels, and can be connected to a computer or master controller



front view

side view



General Luminaire Data

Body Color	matt black
Body Material	Aluminum
Ingress Protection	40

Accessories

Sold Separately	Led Controller
	Amplifier

Electrical Characteristics

Voltage	220-240V
Frequency	50-60Hz
Power Factor	0.9
Protection	Class II
Control	DMX

Certifications & Standards

CE
RoHS
LM80
IEC61347


Product Code

P	A	S	FS	18	B	N	40	NOT	NO	NO	DMX
Family	Sub	Product	Mounting	Dimension	Body	Diffuser	IP	Output	CCT	Beam	Control



pro

acc amplifier

pro acc amplifier converts TTL signals, enabling a communication distance of up to 200 meters. It offers anti-static and anti-lightning protection, with isolated ports to minimize interference. For optimal performance, twisted pair wiring is required

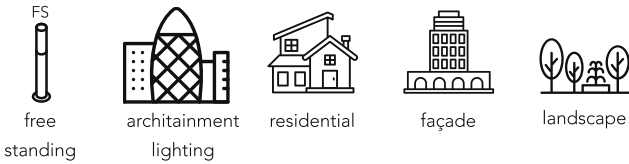

top view

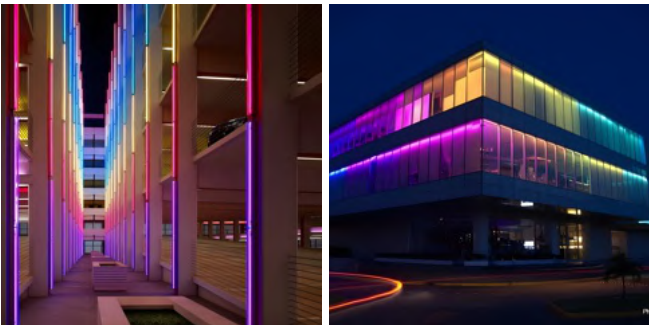

General Luminaire Data

Body Color



aluminum

Body Material

Aluminum

Ingress Protection

65

Accessories

Sold Separately

- Led Controller
- Slave Controller
- Control Gear

Electrical Characteristics

Voltage

24V

Control

NMX DMX Ready

Certifications & Standards

- CE
- RoHS
- LM80
- IEC61347

Product Code

P	A	A	FS	34	A	N	65	NOT	NO	NO	NMX
Family	Sub	Product	Mounting	Dimension	Body	Diffuser	IP	Output	CCT	Beam	Control




pro

meanwell driver

pro meanwell driver is an LED control gear engineered with precision and reliability, it guards against overcurrent and overvoltage, catering to diverse lighting needs in various settings. It provides the safety and precise power required for superior illumination



top view



General Luminaire Data

Body Color



aluminum

Body Material

Aluminum

Ingress Protection

67

Electrical Characteristics

*available upon request

Drive Current

12V: 0-6.2 | 0-8.3 | 0-12.5 | 0-16.6 | 0-20A
24V: 0-3.1 | 0-4.1 | 0-6.2 | 0-8.3 | 0-10A

Output Voltage

12V | 24V | 48V *

Wattage

75 | 100 | 150 | 200 | 240W

Control

DALI

Certifications & Standards

CE
RoHS
LM80
IEC61347

Product Code										*Parameters not interselectable . Each dimension to be matched with corresponding output	
										**Parameters not interselectable . Each dimension to be matched with corresponding output	
P	M	D	SM	DM*	A	N	67	CUR**	VL**	WT*	DAL
Family	Sub	Product	Mounting	Dimension	Body	Diffuser	IP	Current	Voltage	Wattage	Control
				18 180mm				625 6250mA	12 12V	75 75W	
				19 199mm				833 8333mA	12 12V	10 100W	
				21 219mm				125 12500mA	12 12V	15 150W	
				24 244mm				166 16666mA	12 12V	20 200W	
				24 244mm				200 20000mA	12 12V	24 240W	
				18 180mm				312 3125mA	24 24V	75 75W	
				19 199mm				416 4166mA	24 24V	10 100W	
				21 219mm				625 6250mA	24 24V	15 150W	
				24 244mm				833 8333mA	24 24V	20 200W	
				24 244mm				100 10000mA	24 24V	24 240W	


pro

tunable driver

pro tunable driver is an IP67-rated constant voltage LED driver designed for both dimming and color temperature control. Supporting DALI DT8, Push Dimming, and 0–10V Dimming, it offers versatile compatibility for various lighting systems. Its robust, weather-resistant construction ensures reliable performance even in demanding environments



top view



General Luminaire Data

Body Color



aluminum

Body Material

Aluminum

Ingress Protection

67

Certifications & Standards

CE
RoHS
LM80
IEC61347

Electrical Characteristics

Drive Current	12V: 0-6 0-8.3 0-12.5 0-16.7 0-21.5 0-25A
	24V: 0-3 0-4.1 0-6.1 0-8.3 0-10.5 0-12.5A
	48V: 0-1.5 0-2.1 0-3.1 0-4.2 0-5.2 0-6.3A
Output Voltage	12V 24V 48V
Wattage	72 100 150 200 250 300W
Control	DIM 0-10V PUSH Dimming DALI DT8

Product Code										*Parameters not interselectable . Each dimension to be matched with corresponding output	
										**Parameters not interselectable . Each dimension to be matched with corresponding output	
P	T	D	SM	DM*	A	N	67	CUR**	VL**	WT*	CON
Family	Sub	Product	Mounting	Dimension	Body	Diffuser	IP	Current	Voltage	Wattage	Control
				21 217mm				600 6000mA	12 12V	75 75W	DIM 0-10V
				22 227mm				830 8300mA	12 12V	10 100W	PUS Push
				23 237mm				125 12500mA	12 12V	15 150W	Dimming
				28 287mm				167 16700mA	12 12V	20 200W	DAL DALI
				30 302mm				215 21500mA	12 12V	24 240W	
				30 302mm				250 25000mA	12 12v	30 300W	
				21 217mm				300 3000mA	24 24V	75 75W	
				22 227mm				410 4100mA	24 24V	10 100W	
				23 237mm				610 6100mA	24 24V	15 150W	
				28 287mm				830 8300mA	24 24V	20 200W	
				30 302mm				105 10500mA	24 24V	24 240W	
				30 302mm				125 12500mA	24 24V	30 300W	
				21 217mm				150 1500mA	48 48V	75 75W	
				22 227mm				208 2080mA	48 48V	10 100W	
				23 237mm				313 3130mA	48 48V	15 150W	
				28 287mm				417 4170mA	48 48V	20 200W	
				30 302mm				521 5210mA	48 48V	24 240W	
				30 302mm				625 6250mA	48 48V	30 300W	



architectural underwater

introducing a remarkable collection of architectural underwater LED lighting products, meticulously crafted for exceptional durability and versatility. These lighting fixtures are engineered with robust materials that enable them to be fully submersible, opening up a world of creative possibilities for underwater lighting design

whether it's illuminating swimming pools, fountains, or aquatic displays, these fixtures are built to withstand the rigors of underwater environments, ensuring long-lasting performance and reliability



strips

419



spikes

427



floods

433



recessed fixtures

439



strips

our exceptional range of architectural underwater LED strip lighting has been meticulously crafted to thrive in aquatic settings. These underwater LED lights not only endure but also excel, offering a prolonged lifespan while maintaining their brilliance

with their submersible capabilities and enduring design, they stand as the ideal choice for enhancing the enchantment and beauty of any underwater architectural project, creating captivating visual experiences that endure over time



enhanced
aesthetic




uniform light
distribution



multiple CCTs



practical and safe



high luminaire
efficacy



IP rating





pro

sub strip

pro sub strip is a submersible linear LED strip that comes in multiple CCTs and outputs. It is a high-efficiency strip enclosed in Polyurethane material ideal for installation in fountains, pools, and other underwater applications



surface mounted



architectural underwater




residential






wet areas



landscape

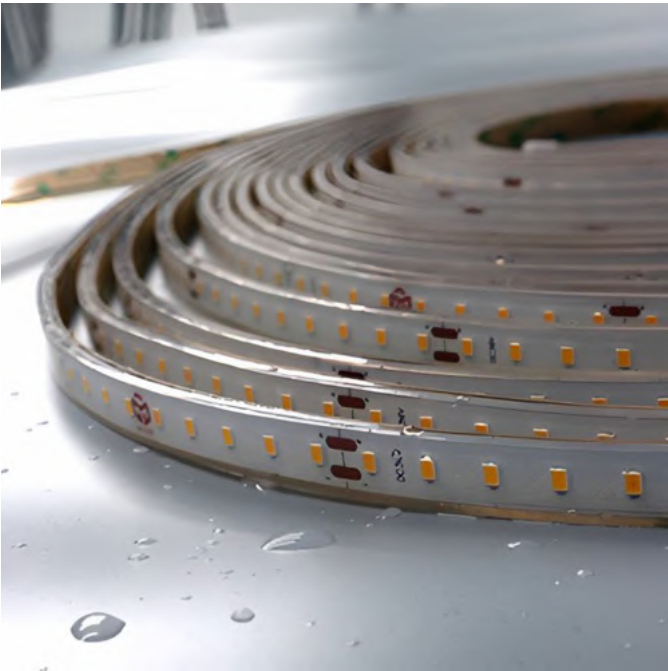

top view



General Luminaire Data

Body Color



white

Diffuser Color



transparent

Body Material

Copper

Diffuser Material

Polyurethane

Ingress Protection

68

Lifetime

50,000hrs

*while data is provided per meter, this item is sold in rolls of 5 meters each

Electrical Characteristics

Voltage

24V

Wattage

4.8 | 9.6 | 14.4W

Control

Not Included

Photometry & Performance

Light Source

LED SMD

Delivered Output

720 | 1440 | 2160lm

Luminaire Efficacy

150lm/W

CRI

80

CCT



2700K



3000K




4000K



6000K

Beam Angle



120°

Accessories

Included	3mm Adhesive Tape
Sold Separately	Control Gear
	Profile

Certifications & Standards

CE
RoHS
LM80
IEC61347

Product Code

*Parameters not **interselectable**. Each dimension to be matched with corresponding output

P	S	S	SM	DM*	W	T	68	OUT*	CT	12	NOT
Family	Sub	Product	Mounting	Dimension	Body	Diffuser	IP	Output	CCT	Beam	Control
				08 08mm				120 120lm	27 2700K		
				10 10mm				144 1440lm	30 3000K		
				10 10mm				216 2160lm	40 4000K		
									60 6000K		

pro

sub line

pro sub line is ideal for wet areas thanks to its submersible feature. Its flexible form makes it advantageous for seamless positioning and it also comes in various outputs and color temperatures to suit any preferred style



surface mounted



architectural underwater



residential




façade



landscape



top view



General Luminaire Data

Body Color



white

Body Material

PVC

Ingress Protection

68

Lifetime

50,000hrs

*while data is provided per meter, this item is sold in rolls of 5 meters each

Electrical Characteristics

Voltage

24V

Wattage

5 | 10W

Control

Not Included | NMX DMX Ready

Photometry & Performance

Light Source

LED SMD

Delivered Output

Single Color 250 | 500lm

RGB 150 | 300lm

Tunable White 200 | 400lm

Luminaire Efficacy

50lm/W | RGB 30lm/W | TW 40lm/W

CRI

80

CCT



2700K



3000K



4000K



6000K




RGB



TW
2700-6000K

Beam Angle



Wide Beam

Accessories

Sold Separately

Control Gear

Clips

Certifications & Standards

CE

RoHS

LM80

IEC61347

Product Code

*For RGB variations only; **For Tunable White variations only

P	S	L	SM	16	W	N	68	OUT	CT	12	CON
Family	Sub	Product	Mounting	Dimension	Body	Reflector	IP	Output	CCT	Beam	Control
								250 250lm	27 2700K		NOT Included
								500 500lm	30 3000K		NMX DMX
								150 150lm*	40 4000K		Ready*
								300 300lm*	60 6000K		
								200 200lm**	RG RGB*		
								400 400lm**	TW Tunable		
									2700-6000K**		



spikes

introducing a cutting-edge collection of underwater spike lighting solutions, meticulously crafted for aquatic environments. These remarkable fixtures are engineered with submersible capabilities and durable materials, offering unparalleled versatility and longevity

the seamless blend of aesthetics and performance ensures these lighting solutions stand out as ideal choices for elevating underwater project's appeal



enhanced
aesthetic



diverse beam
angles



multiple CCTs




durable body
material



RGBW



IP rating

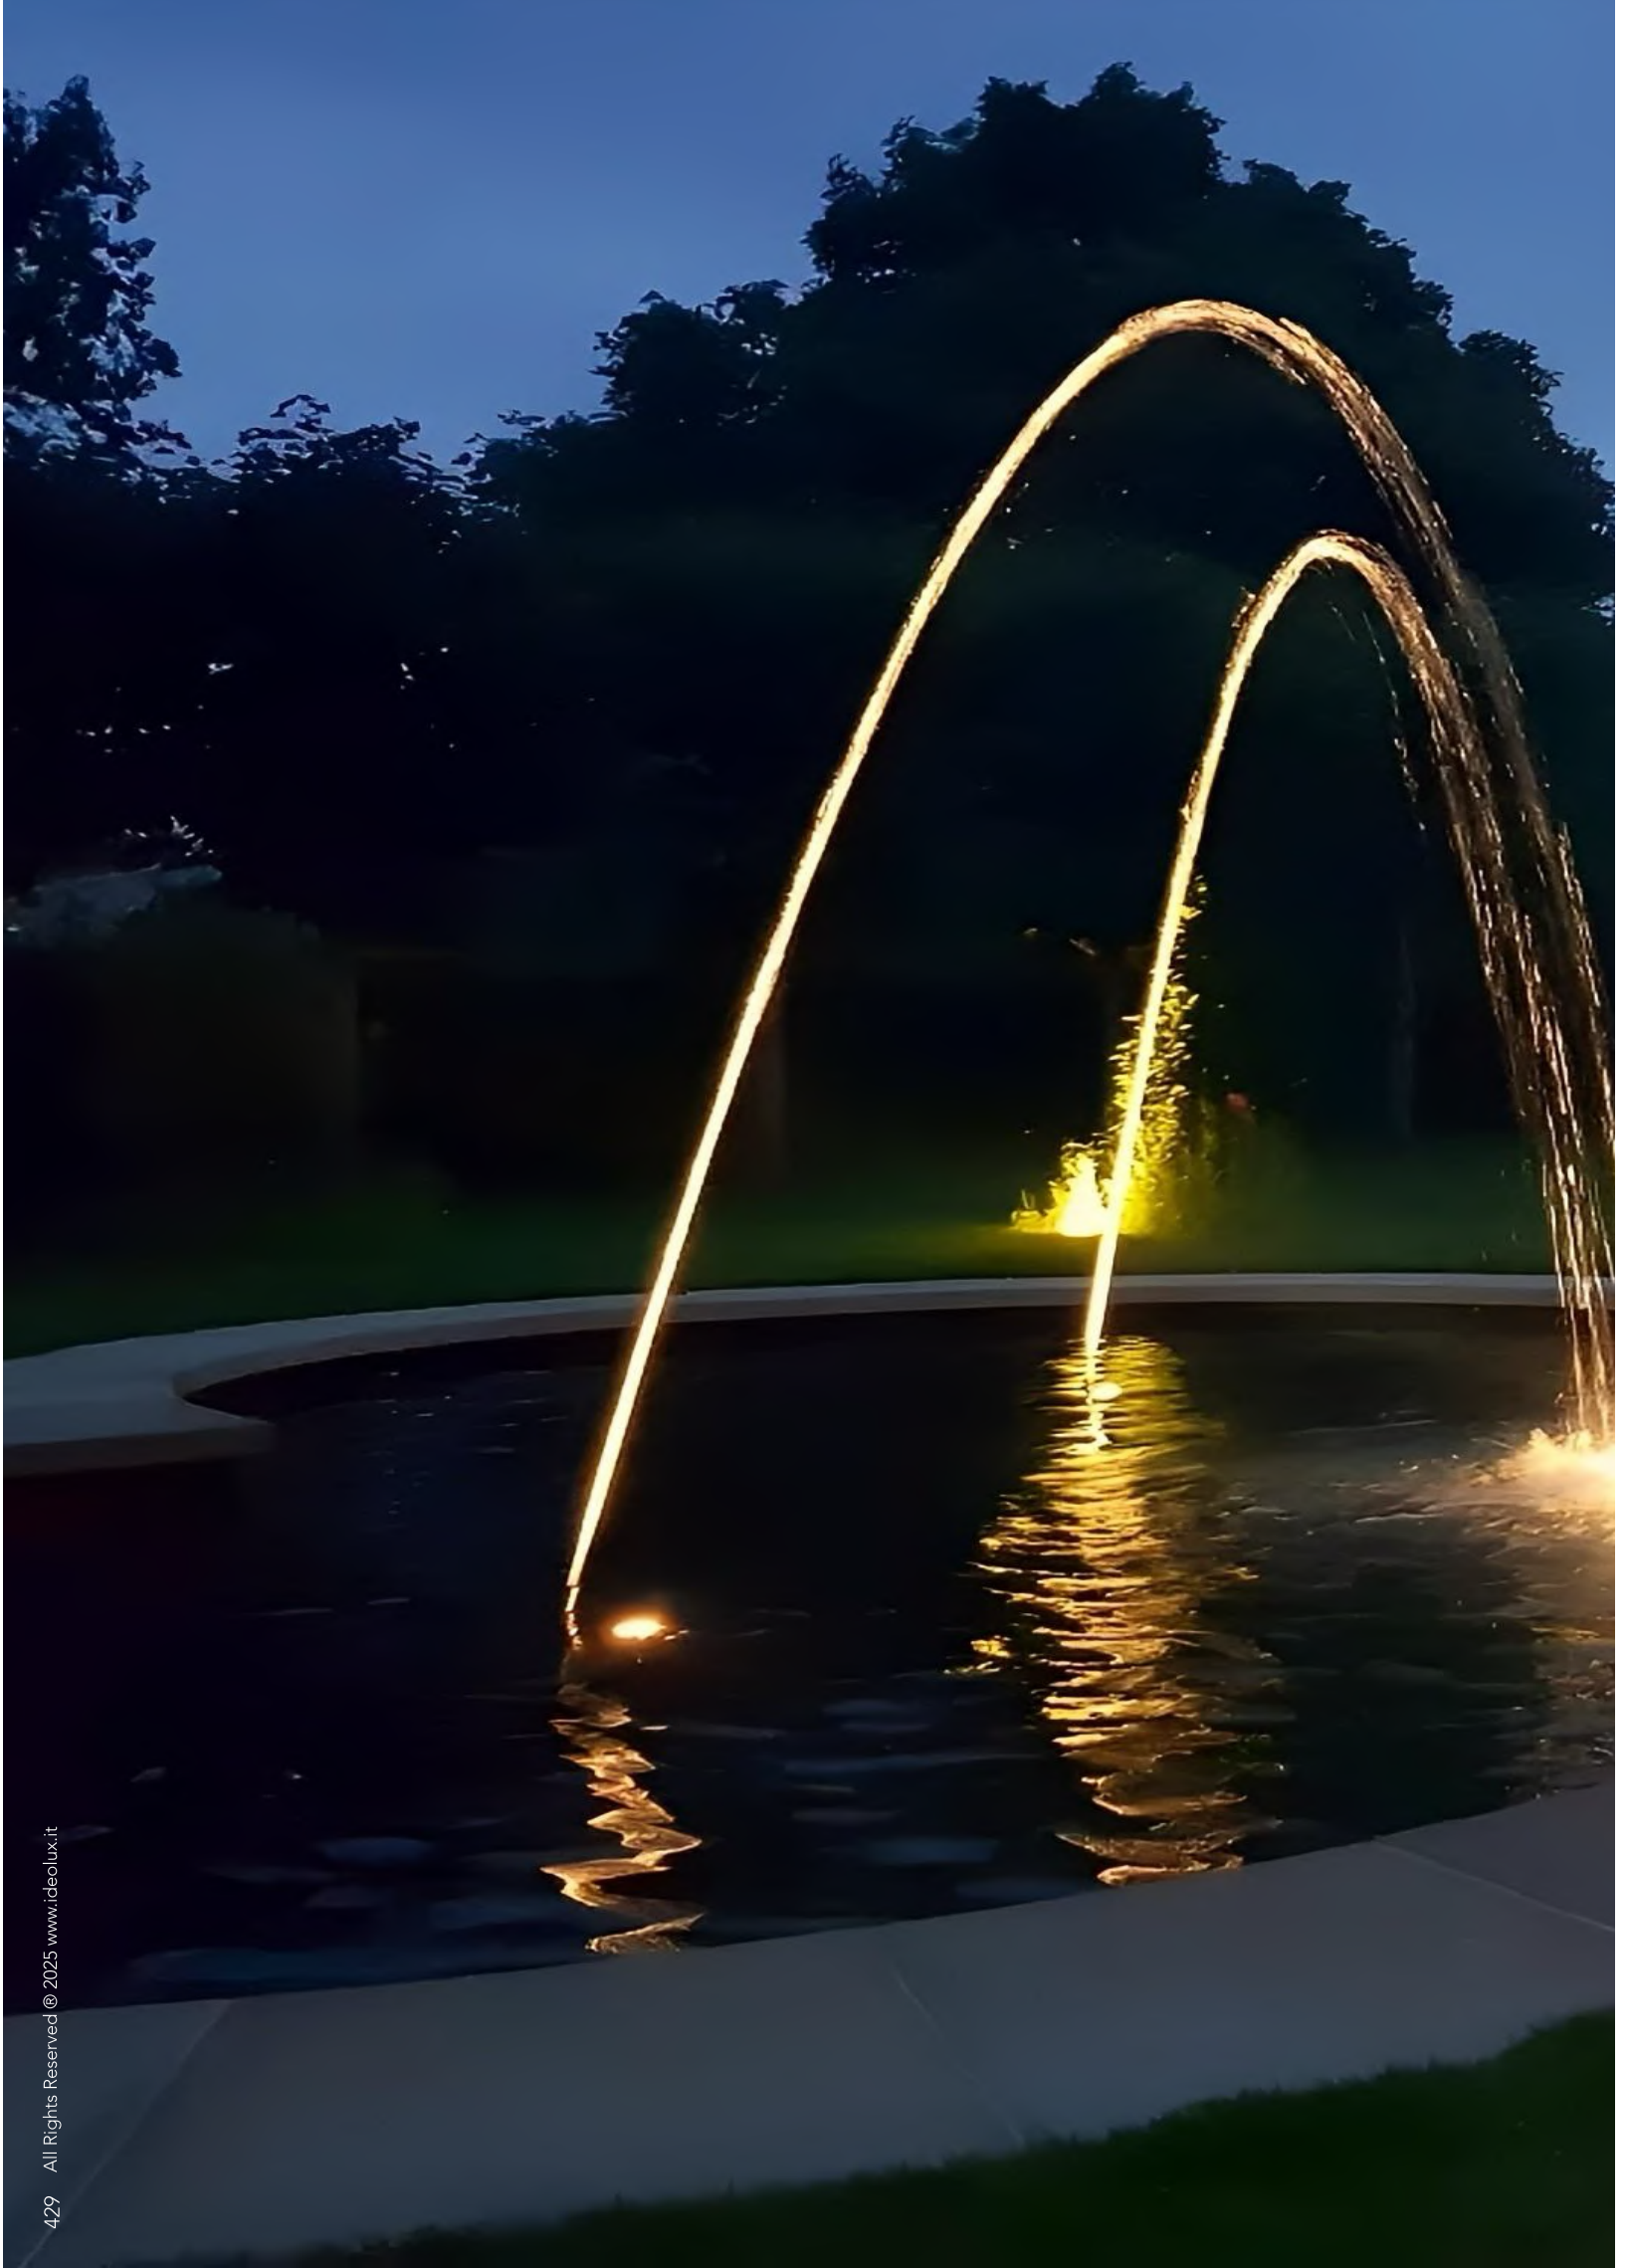



pro

sub spike

pro sub spike is a cylindrical LED floodlight designed for underwater applications. Featuring precise optics and a range of CCTs, it creates striking effects in settings such as fountains, pools, and other aquatic areas



surface mounted



architectural underwater



commercial




façade




landscape

side view



front view



General Luminaire Data

Body Color	 stainless steel
Diffuser Color	 transparent frosted
Body Material	Stainless Steel
Diffuser Material	Glass
Ingress Protection	68
Lifetime	50,000hrs


Electrical Characteristics

Voltage	12V
Wattage	3 8 15W
Control	Not Included NMX DMX Ready

Photometry & Performance

Light Source	LED
Delivered Output	Single Color 240 640 1200lm RGBW 135 360 675lm
Luminaire Efficacy	80lm/W RGBW 45lm/W
CRI	80
CCT	 2700K
	 3000K
	 4000K
	 6000K
	 rgbw

Beam Angle

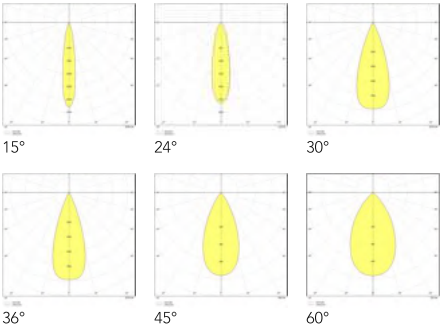

Accessories

Sold Separately Control Gear
Spike



Certifications & Standards

CE
RoHS
LM80
IEC61347

pro sub stake
pro sub stake is a ground stake accessory used to support ground installation
L 205mm PSSIR20BNNONOTNONONOT

Body Color Black
Body Material Aluminum

Product Code

*Parameters not **interselectable**. Each dimension to be matched with corresponding output
**For RGBW variations only

P	S	S	SM	DM*	S	D	68	OUT*	CT	BM	CON
Family	Sub	Product	Mounting	Dimension	Body	Diffuser	IP	Output	CCT	Beam	Control
				32 32mm		T Transparent		240 240lm	27 2700K	10 10deg	NOT Included
				44 44mm		F Frosted		640 640lm	30 3000K	15 15deg	NMX DMX
				59 59mm				120 1200lm	40 4000K	24 24deg	Ready**
				32 32mm				135 135lm**	60 6000K	30 30deg	
				44 44mm				360 360lm**	RW RGBW**	36 36deg	
				59 59mm				675 675lm**		45 45deg	
										60 60deg	



floods

our underwater floodlights are masterfully designed for aquatic settings. These exceptional fixtures, specially engineered for submersion, bring a new dimension to underwater lighting

their robust construction and watertight design ensure reliability and longevity, while their radiance transforms aquatic spaces into mesmerizing landscapes



enhanced
aesthetic



diverse beam
angles



multiple CCTs



durable body
material



DMX

dmx control
function



IP rating






pro

sub flood

pro sub flood is a submersible round-shaped LED floodlight available as well in RGBW variation. It is equipped with precise optics and multiple lumen outputs which produces impressive impacts on fountains, pools, and other wet areas



General Luminaire Data


Body Color	 stainless steel
Diffuser Color	 transparent
Body Material	Stainless Steel
Diffuser Material	Tempered Glass
Ingress Protection	68
Lifetime	50,000hrs

Electrical Characteristics


Voltage	12V 24V
Wattage	Single Color 36W RGB 45W RGBW 63W
Control	Not Included NMX DMX Ready

Photometry & Performance

Light Source	LED SMD
Delivered Output	Single Color 2376lm RGB 1800lm RGBW 2898lm
Luminaire Efficacy	66lm/W RGB 40lm/W RGBW 46lm/W
CRI	80
CCT	



Beam Angle

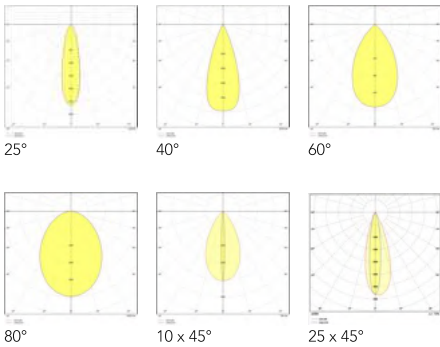

Accessories		Certifications & Standards
Sold Separately	Control Gear	CE RoHS LM80 IEC61347

Product Code *Parameters not **interselectable**. Each dimension to be matched with corresponding output

P	S	F	FM	22	S	T	68	OUT	CT	BM	CON
Family	Sub	Product	Mounting	Dimension	Body	Diffuser	IP	Output	CCT	Beam	Control
								237 2376lm	27 2700K	10 10deg	NOT Included
								180 1800lm*	30 3000K	25 25deg	NMX DMX
								289 2898lm**	35 3500K	40 40deg	Ready*
									40 4000K	60 60deg	NMX DMX
									57 5700K	80 80deg	Ready**
									60 6000K	45 45 x 10	
									RG RGB*	25 25 x 45	
									RW RGBW**		



recessed fixtures

an extraordinary range of underwater recessed uplights, meticulously designed for the depths of aquatic beauty. Their robust and water-sealed construction guarantees longevity and reliability, while their radiant beams transform underwater realms into captivating landscapes

subtle in their form yet striking in their impact, these uplights elegantly emphasize the intricate details of underwater architecture, casting a gentle luminous embrace on every aquatic masterpiece



enhanced
aesthetic



diverse beam
angles



multiple CCTs



durable body
material



safe to handle



IP rating





pro

sub bar

pro sub bar is a linear LED uplight which features a watertight, stainless steel body ideal for underwater applications. It is available as well in different lumen outputs, beam angles, and color temperatures



surface mounted



architectural underwater



commercial






façade



landscape

top view

side view



General Luminaire Data

Body Color



stainless steel

Diffuser Color



transparent

Body Material

Stainless Steel

Diffuser Material

PMMA

Ingress Protection

68

Lifetime

50,000hrs

Electrical Characteristics

Voltage

24V

Wattage

30W

Control

Not Included | NAL DALI Ready

Photometry & Performance

*available upon request

Light Source

LED SMD

Delivered Output

2010lm

Luminaire Efficacy

67lm/W

CRI

80

CCT

2700K

3000K

4000K


5000K

RGBW *


TW

2700K-5000K *


Beam Angle




08°




15°




30°



45°




60°



10 x 60°

Accessories		Certifications & Standards
Included	Mounting Bracket	CE
Sold Separately	Control Gear	RoHS
		LM80
		IEC61347

Product Code														
P	S	B	SM	10	S				T	68	201	CT	BM	CON
Family	Sub	Product	Mounting	Dimension	Body				Diffuser	IP	Output	CCT	Beam	Control
												27 2700K	08 08deg	NOT Included
												30 3000K	15 15deg	NAL DALI
												40 4000K	30 30deg	Ready
												50 5000K	45 45deg	
													60 60deg	
													10 10 x 60	

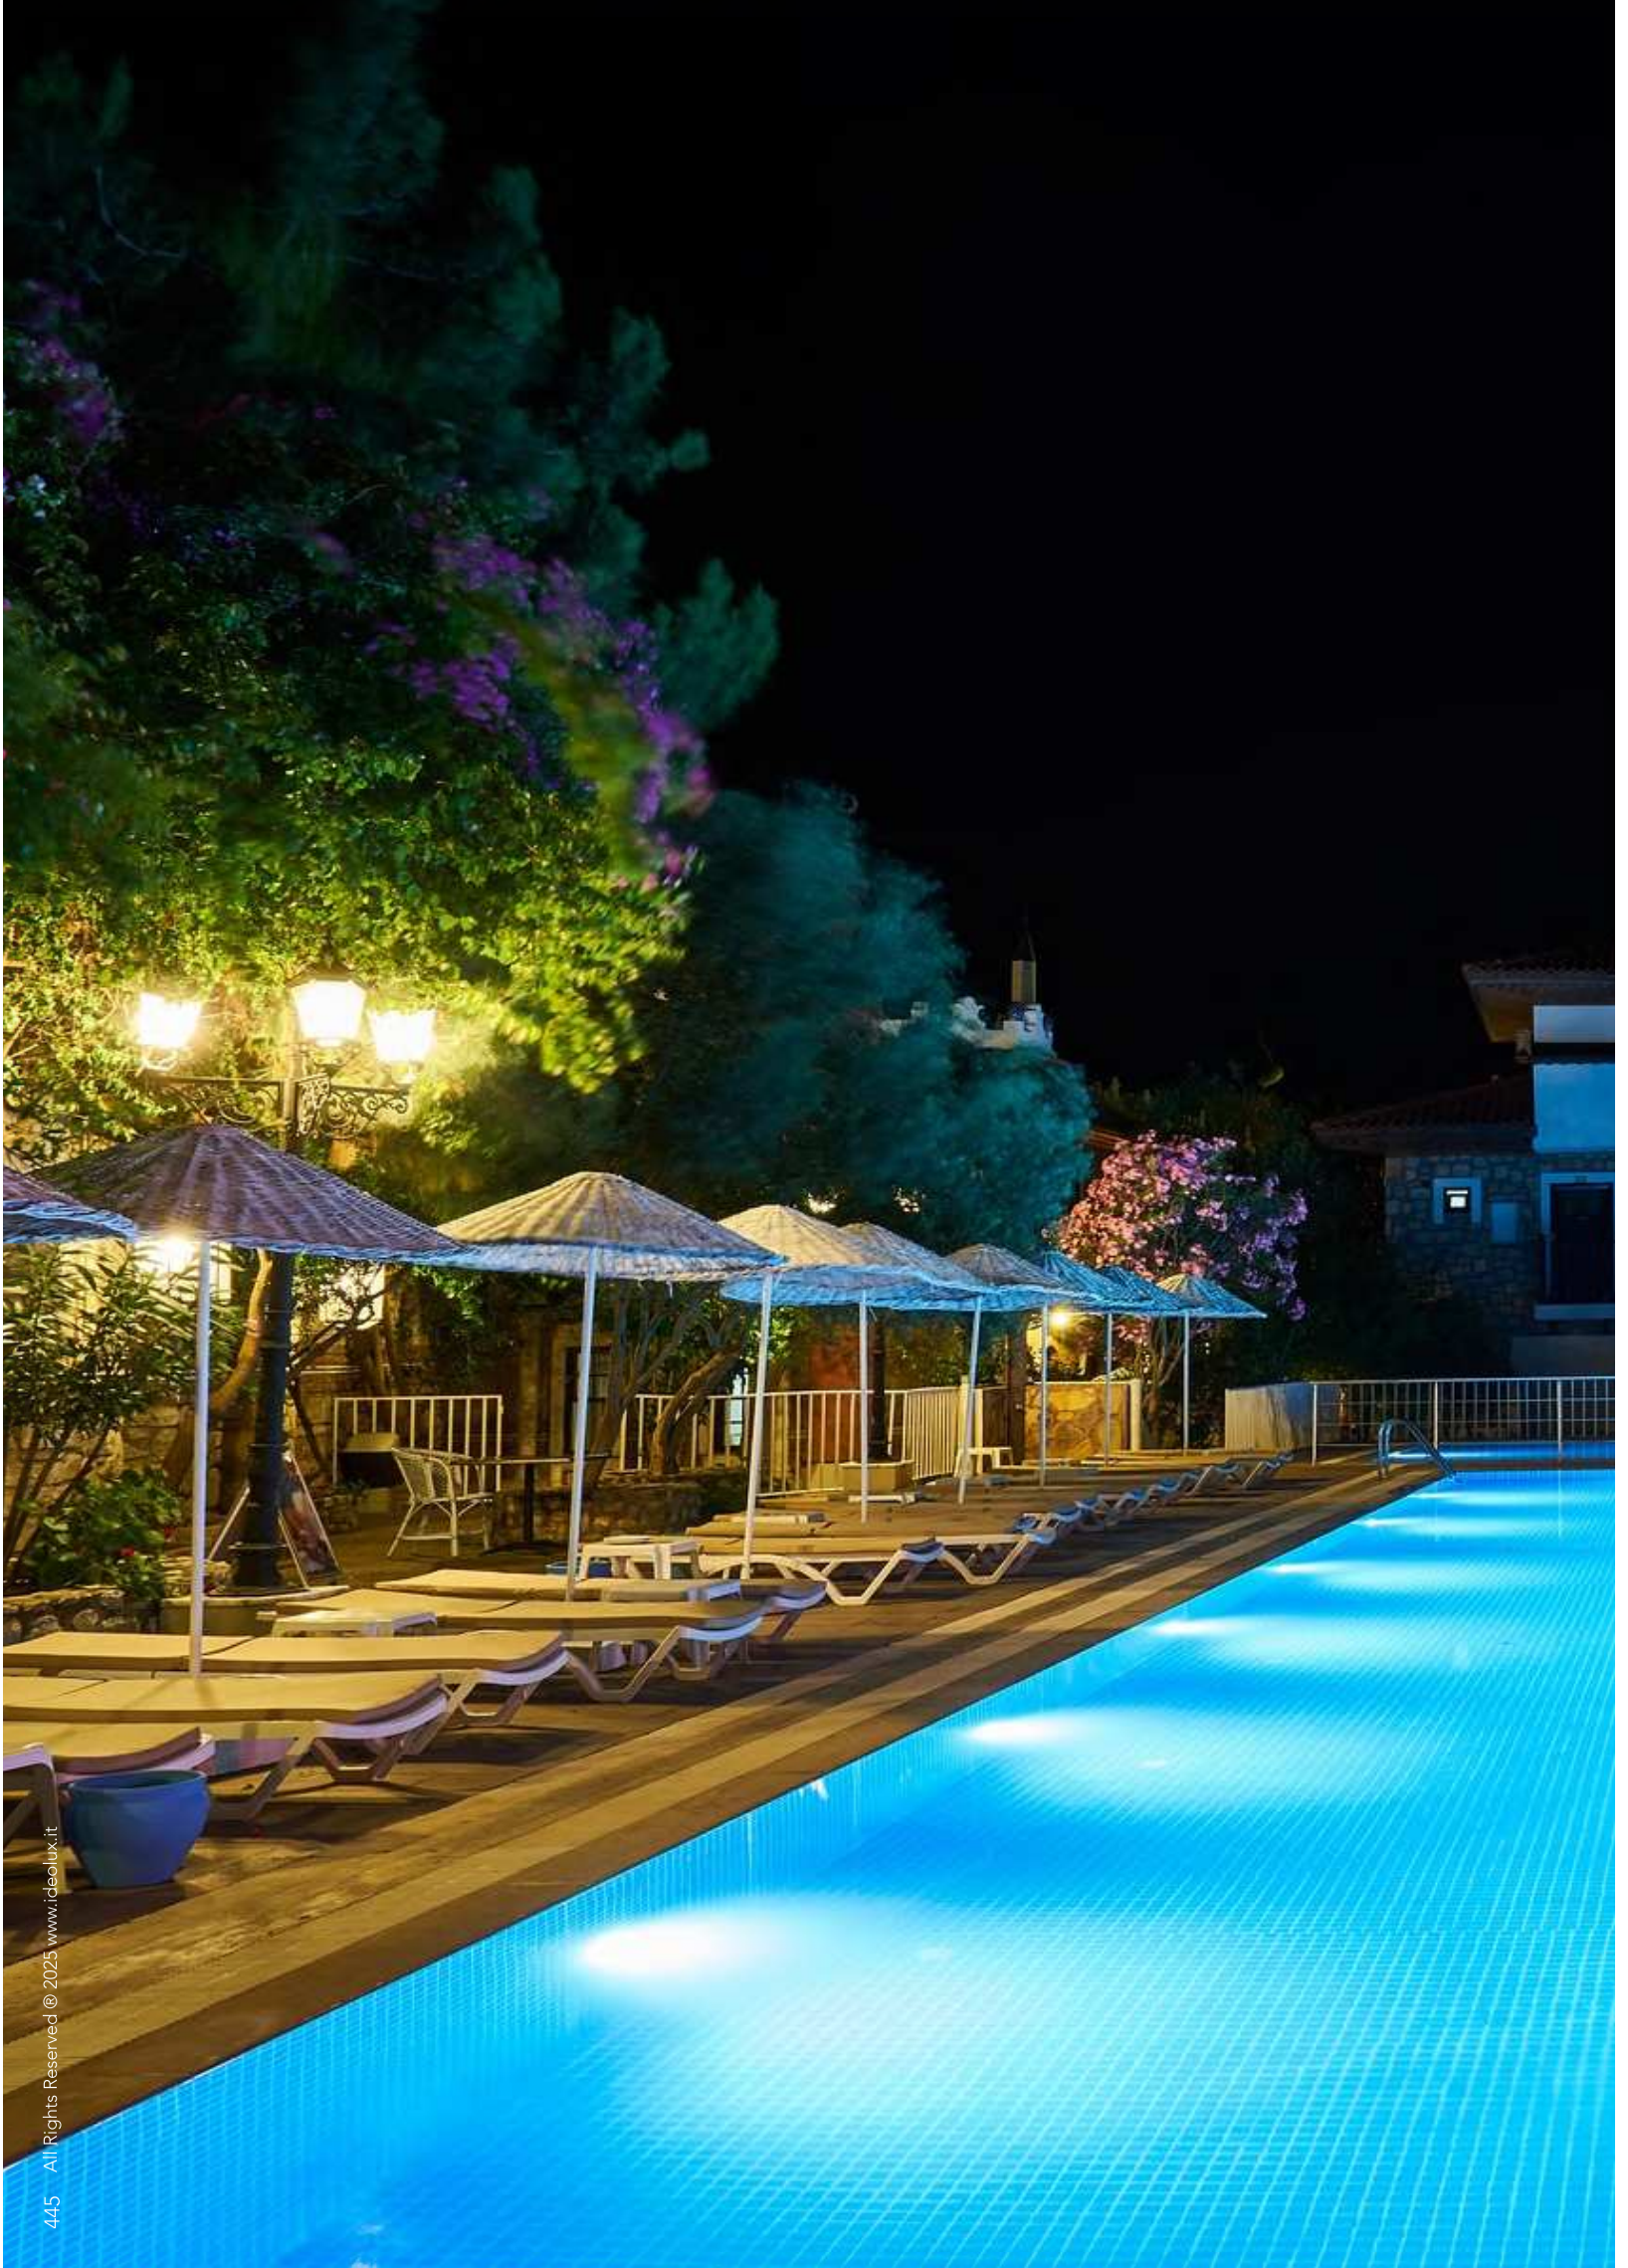




pro sub up



pro sub up is a submersible waterproof uplight. It consists of a high transmitting tempered glass and a corrosion-resistant body, making it applicable for many underwater applications



top view



side view

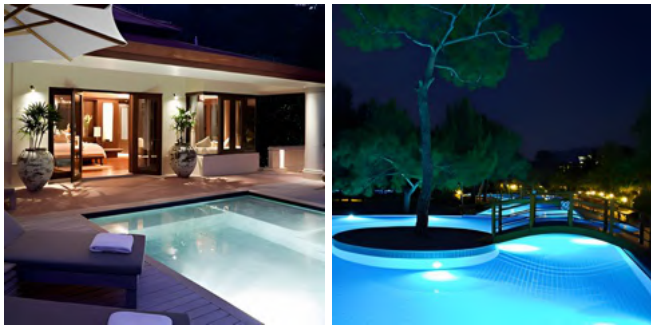

General Luminaire Data


Body Color	 stainless steel
Diffuser Color	 transparent
Body Material	Stainless Steel
Diffuser Material	Glass
Ingress Protection	68
Lifetime	50,000hrs

Electrical Characteristics


Voltage	12V 24V
Wattage	Single Color 8 12 24 36 54W RGB 12 18 36 54W RGBW 12 18 36 54W
Control	Not Included NMX DMX Ready

Photometry & Performance

Light Source	LED SMD
Delivered Output	Single Color 640 960 1920 2880 4320lm RGB 300 450 900 1350lm RGBW 420 630 1260 1890lm
Luminaire Efficacy	80lm/W RGB 25lm/W RGBW 35lm/W
CRI	80
CCT	



Beam Angle

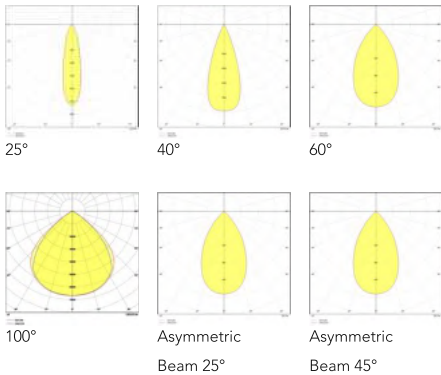


Accessories		Certifications & Standards
Included	Mounting Sleeve	CE
Sold Separately	Control Gear	RoHS
		LM80
		IEC61347

Product Code											*Parameters not interselectable . Each dimension to be matched with corresponding output
											For RGB variations only *For RGBW variations only
P	S	U	IR	DM*	S	T	68	OUT*	CT	BM	CON
Family	Sub	Product	Mounting	Dimension	Body	Diffuser	IP	Output	CCT	Beam	Control
				13 135mm				640 640lm	27 2700K	10 10deg	NOT Included
				15 150mm				640 640lm	30 3000K	25 25deg	NMX DMX
				18 180mm				960 960lm	35 3500K	40 40deg	Ready**
				20 205mm				192 1920lm	40 4000K	60 60deg	NMX DMX
				25 250mm				288 2880lm	57 5700K	10 100deg	Ready***
				25 250mm				432 4320lm	60 6000K	AB AB 25deg	
				13 135mm				300 300lm**	RG RGB**	AB AB 45deg	
				15 150mm				300 300lm**	RW RGBW***		
				18 180mm				450 450lm**			
				20 205mm				900 900lm**			
				25 250mm				135 1350lm**			
				13 135mm				420 420lm***			
				15 150mm				420 420lm***			
				18 180mm				630 630lm***			
				20 205mm				126 1260lm***			
				25 250mm				189 1890lm***			

pro sub jet

pro sub jet is an LED lighting fixture specifically designed for illuminating water fountains. It adds a perfect high-end look by highlighting the elegant movement of water features on a fountain

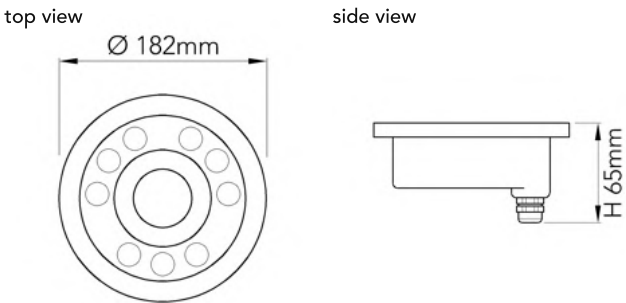

General Luminaire Data


Body Color	 stainless steel
Diffuser Color	 transparent
Body Material	Stainless Steel
Diffuser Material	Glass
Ingress Protection	68
Lifetime	50,000hrs

Electrical Characteristics


Voltage	12V 24V
Wattage	Single Color 18 24W RGB 22.5 30W RGBW 31.5 42W
Control	Not Included NMX DMX Ready

Photometry & Performance

Light Source	LED SMD
Delivered Output	Single Color 1440 1920lm RGB 675 900lm RGBW 945 1260lm
Luminaire Efficacy	80lm/W RGB 30lm/W RGBW 30lm/W
CRI	80
CCT	



Beam Angle

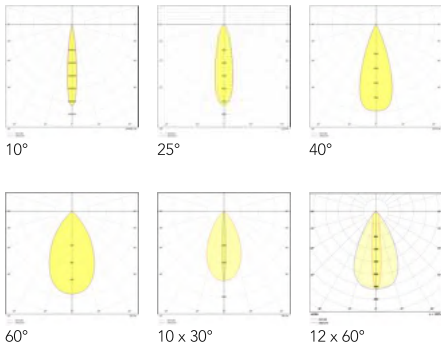

Accessories

Sold Separately Control Gear

Certifications & Standards

CE
RoHS
LM80
IEC61347

Product Code

P **S** **J** **IR** **18** **S**
Family Sub Product Mounting Dimension Body

T
Diffuser

68
IP

*For RGB variations only

OUT
Output

144 1440lm
192 1920lm
675 675lm*
900 900lm*
945 945lm**
126 1260lm**

*For RGB variations only

CT
CCT

27 2700K
30 3000K
35 3500K
40 4000K
57 5700K
60 6000K
RG RGB*
RW RGBW**

**For RGBW variations only

BM
Beam

10 10deg
25 25deg
40 40deg
60 60deg
30 30 x 10
12 12 x 60

CON
Control

NOT Included
NMX DMX
Ready*
NMX DMX
Ready**


pro

sub mini



pro sub mini is a compact, submersible waterproof uplight. Its compact design makes it an ideal choice for situations where space is limited while providing the reliability and functionality expected in underwater lighting



side view



box view

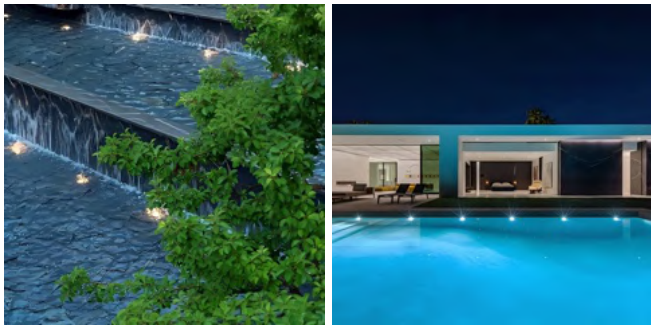

General Luminaire Data

Body Color	stainless steel
Diffuser Color	transparent
Body Material	Stainless Steel
Diffuser Material	Glass
Ingress Protection	68
Lifetime	50,000hrs


Electrical Characteristics

Voltage	24V
Wattage	1.5 3W
Control	Not Included NMX DMX Ready

Photometry & Performance

Light Source	LED SMD
Delivered Output	Single Color 090 180lm RGB 090 180lm
Luminaire Efficacy	60lm/W RGB 60lm/W
CRI	80
CCT	2700K 3000K 4000K 6000K rgb

Beam Angle

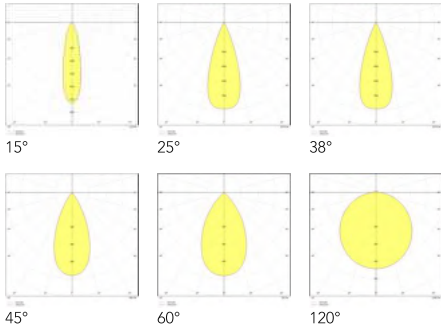

Accessories

Included	Mounting Sleeve
Sold Separately	Control Gear

Certifications & Standards

CE
RoHS
LM80
IEC61347

Product Code

P	S	M	IR	45	S	T	68	OUT	CT	BM	CON
Family	Sub	Product	Mounting	Dimension	Body	Diffuser	IP	Output	CCT	Beam	Control
								090 090lm	27 2700K	15 15deg	NOT Included
								180 180lm	30 3000K	25 25deg	NMX DMX
									40 4000K	38 38deg	Ready
									60 6000K	45 45deg	
									RW RGB	60 60deg	
										12 120deg	

contacts

Legal Office

Via del turco 21 44121
Ferrara (FE), Italy
+39 0426 99 71 70
info@ideolux.it

Factory

Via delle Industrie 1 45018
Porto Tolle (RO), Italy
+39 0426 99 71 70
info@ideolux.it

Regional Office

IFZA DDP Bldg A2, Dubai
Silicon Oasis, Dubai, UAE
+971 58 575 8691
info@ideolux.it

United Arab Emirates

Grosvenor Business Tower 2113
Barsha Heights, Dubai, UAE
+971 4 445 8059
info@ideolux.it

Saudi Arabia

Ideolux KSA Rep Office
Riyadh, Saudi Arabia
+966 54 190 1971
aki@ideolux.it

Qatar

Ideolux Qatar Rep Office
Doha, Qatar
+974 5502 0186
yrr@ideolux.it

Morocco

Ideolux Morocco Rep Office
Casablanca, Morocco
+212 70 075 0642
wzo@ideolux.it

this product book has been meticulously
designed and developed in-house by the
Ideolux Product Marketing Team, reflecting our
dedication to showcasing innovative solutions
and delivering excellence in every detail

ideolux

